## High-Mu Triode

# NUVISTOR TYPE For Industrial Applications

#### GENERAL DATA

Pin 8 - Cathode

Pin 12 - Heater

Pin 9 - Same as Pin 1 Pin 10 - Heater

INDEX=LARGE LUG • = PIN CUT OFF

#### INDUSTRIAL SERVICE

Maximum Ratings,	Absolute-Maximum	Values:
------------------	------------------	---------

For operation at any altitude						
PLATE SUPPLY VOLTAGE	330	max.	volts			
PLATE VOLTAGE	110	max.	volts			
GRID VOLTAGE:						
Negative-bias value	55	max.	volts			
Peak-positive value	2	max.	volts			
GRID CURRENT	2	max.	ma			
PLATE CURRENT	20	max.	ma			
CATHODE CURRENT	15	max.	ma			
PLATE DISSIPATION	. 1	max.	watt			
PEAK HEATER-CATHODE VOLTAGE:						
Heater negative with respect to cathode		max.	volts			
Heater positive with respect to cathode	100	max.	volts			
Maximum Circuit Values:						
Grid-Circuit Resistance: b						
For fixed-bias operation	0.5	max.	megohm			
For cathode-bias operation	1	max.	megohm			
•						

<sup>&</sup>lt;sup>a</sup> Pin is cut off close to ceramic wafer.

### CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Heater Current	1	0.125	0.145	amp
Grid to plate	2	0.8	1	<i>μμ</i> .f
heater	2	3.4	5	μμf
heater	2 2 1,3 1,4 1,3 3,5	1.3 1 0.16 5.5 - 7900 6900	2.1 1.6 0.28 8.8 50 10900	μμf μμf μμf ma μa μmhos μmhos
Difference between Trans- conductance (1) and Trans- conductance (2), expressed in per cent of Transconduc-				
tance (1)	_	-	15	%
Reverse Grid Current Amplification Factor	1,6 1,3	- 54	0.1 74	μa
Heater negative with respect to cathode Heater positive with	1,7	-	5	μa
respect to cathode	1,7	-	5	$\mu$ a

 $<sup>^{</sup>f b}$  For operation at metal-shell temperatures up to 150 $^{
m o}$  C.

Leakage Resistance:
Between grid and all other
electrodes tied together . . . 1,8 1000 - megohms
Between plate and all other
electrodes tied together . . . 1,9 1000 - megohms

Note 1: With 6.3 volts ac or dc on heater.

Note 2: Measured in accordance with EIA Standard RS-191-A.

Note 3: With dc plate supply volts = 110, cathode resistor = 150 ohms, and cathode-bypass capacitor = 1000  $\mu$ f.

Note 4: With dc plate volts = 110, dc grid volts = -5, and metal shell connected to ground.

Note 5: With 5.7 volts ac or dc on heater.

Note 6: With dc plate volts = 150, grid supply volts = -1.7, grid resistor = 0.5 megohm, and metal shell connected to ground.

Note 7: With 100 volts dc applied between heater and cathode.

Note 8: With grid 100 volts negative with respect to all other electrodes tied together.

Note 9: With plate 300 volts negative with respect to all other electrodes tied together.

#### SPECIAL RATINGS & PERFORMANCE DATA

#### Shock Rating:

#### Fatigue Rating:

described above.

Vibrational Acceleration . . . . . . . . . . 2.5 max. g

This test is performed on a sample lot of tubes to determine ability of tube to withstand the specified vibrational acceleration. Tubes are rigidly mounted, supplied with normal heater voltage only, and subjected for 48 hours to 2.5-g vibrational acceleration at 60 cycles per second in a direction perpendicular to the longitudinal axis of the tube. At the end of this test, tubes are criticized for the same characteristics and end-point values as in the Shock Rating Test

#### Variable-Frequency Vibration Performance:

This test is performed on a sample lot of tubes from each production run. The tube is operated under the conditions specified in CHARACTERISTICS RANGE VALUES for Transconductance (I) with the addition of a plate-load resistor of 2000 ohms. During operation, tube is vibrated in a direction perpendicular to the longitudinal axis of the tube through the frequency range from 50 to 15,000 cycles per second under the following conditions: a sweep rate of one octave per 30 seconds from

50 to 3000 cps, a 7-second sweep from 3000 to 15,000 cps, and a constant vibrational acceleration of 1 g. During the test, tube must not show an rms output voltage in excess of: (1) 35 millivolts from 50 to 3000 cps, (2) 60 millivolts from 3000 to 6000 cps, and (3) 500 millivolts from 6000 to 15,000 cps.

#### Low-Pressure Voltage-Breakdown Test:

This test is performed on a sample lot of tubes from each production run. In this test, tubes are operated with 240 rms volts applied between plate and all other electrodes and will not break down or show evidence of corona when subjected to air pressures equivalent to altitudes of up to 100,000 feet.

#### Heater Cycling:

Cycles of Intermittent Operation . . . . 2000 min. cycles
This test is performed on a sample lot of tubes from each
production run under the following conditions: heater volts
= 7.5 cycled one minute on and two minutes off; heater 100
volts negative with respect to cathode; grid, plate, and metal
shell connected to ground. At the end of this test, tubes are
tested for open heaters, heater-cathode shorts, and heatercathode leakage current.

#### Shorts and Continuity:

This test is performed on a sample lot of tubes from each production run. Tubes are subjected to the Thyratron-Type Shorts Test described in MIL-E-ID, Amendment 2, paragraph 4.7.7, except that tapping is done by hand with a soft rubber tapper. See accompanying Shorts-Test Acceptance-Limits curve. Tubes are criticized for permanent or temporary shorts and open circuits.

#### Early-Hour Stability Life Performance:

This test is performed on a sample lot of tubes from each production run to insure that tubes are properly stabilized. In this test, tubes are operated for 20 hours at maximum-rated plate dissipation. After 2 hours of operation and again after 20 hours of operation, tubes are checked for transconductance under the conditions specified in CHARACTER-ISTICS RANGE VALUES for Transconductance (I). A tube is rejected if its transconductance after two or 20 hours of operation has changed more than 10 per cent from the 0-hour value.

#### 100-Hour Life Performance:

This test is performed on a sample lot of tubes from each production run to insure a low percentage of early-hour inoperatives. Tubes are operated for 100 hours at maximum-rated plate dissipation, and then subjected to the Shorts and Continuity test previously described. Tubes must show a value not less than 6200 micromhos for Transconductance (1), and a value not greater than 0.2 microamperes for reverse grid current under conditions specified in CHARACTERISTICS RANGE VALUES.



#### 1000-Hour Conduction Life Performance:


This test is performed on a sample lot of tubes from each production run to insure high quality of the individual tube and guard against epidemic failures due to excessive changes in any of the characteristics indicated below. In this test, tubes are operated for 1000 hours at maximum-rated plate dissipation, and then criticized for inoperatives, reverse grid current, heater-cathode leakage current, and leakage resistance. In addition, the average change in transconductance of the lot from the 0-hour value for Transconductance (1) specified in CHARACTERISTICS RANGE VALUES, must not exceed 15 per cent at 500 hours, and 20 per cent at 1000 hours.


#### 1000-Hour Standby Life Performance:

This test is performed on a sample lot of tubes from each production run. The tubes are operated for 1000 hours with only normal heater voltage applied. Tubes are criticized for interelectrode leakage, reverse grid current, change in transconductance of individual tubes from values at 0-hours and cathode interface resistance greater than 25 ohms. Interface resistance is measured by Method B of ASTM specification F300-57T.

c Specifications for tapper supplied on request.

## SHORTS-TEST ACCEPTANCE LIMITS

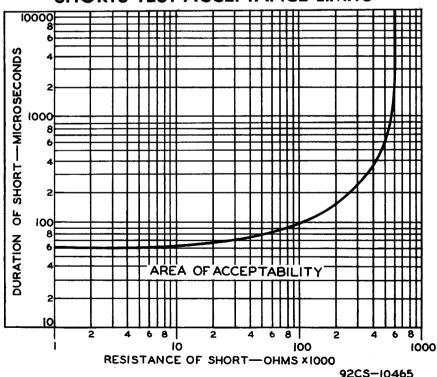


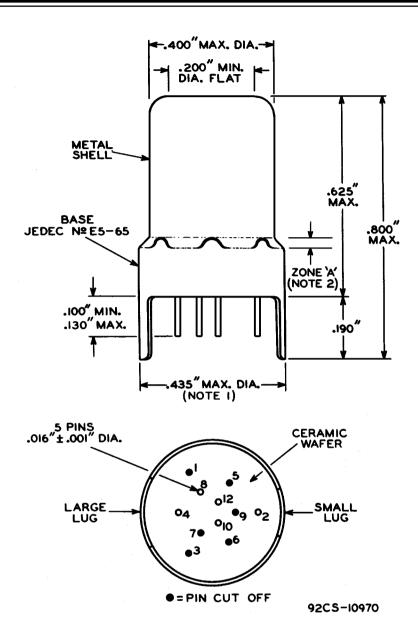


NOTE 1: MAXIMUM OUTSIDE DIAMETER OF 0.440" IS PERMITTED ALONG 0.190" LUG LENGTH.

NOTE 2: SHELL TEMPERATURE SHOULD BE MEASURED IN ZONE "A" BETWEEN BROKEN LINES.

## **AVERAGE PLATE CHARACTERISTICS**

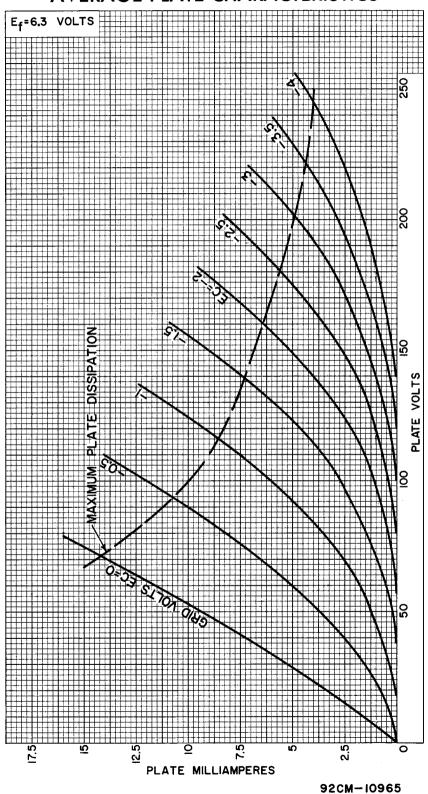

## **AVERAGE CHARACTERISTICS**

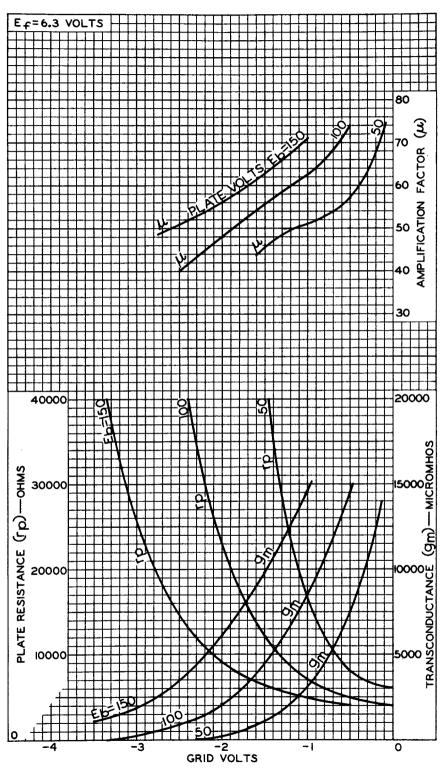

92CM-10967