



5BP1-A

5BP1-A

HIGH-VACUUM CATHODE-RAY TUBE

Supersedes Type 5BP1

General:

Heater, for Unipotential Cathode:

Voltage $6.3 \pm 10\%$ ac or dc volts
 Current 0.6 amp.

Direct Interelectrode Capacitances (Approx.):

Grid No.1 to All Other Electrodes 8.0 μf
 DJ₁ to DJ₂ 1.3 μf
 DJ₃ to DJ₄ 1.2 μf
 DJ₁ to All Other Electrodes 9.5 μf
 DJ₃ to All Other Electrodes 12.0 μf
 DJ₁ to All Other Electrodes except DJ₂ 8.0 μf
 DJ₂ to All Other Electrodes except DJ₁ 7.5 μf
 DJ₃ to All Other Electrodes except DJ₄ 10.0 μf
 DJ₄ to All Other Electrodes except DJ₃ 7.5 μf

Phosphor (For Curves, see front of this Section) No.1

Fluorescence Green

Persistence Medium

Focusing Method Electrostatic

Deflection Method Electrostatic

Overall Length $16\frac{3}{4}'' \pm \frac{3}{8}''$

Greatest Diameter of Bulb $5\frac{1}{4}'' + \frac{1}{16}''$
 $- \frac{3}{32}''$

Minimum Useful Screen Diameter $4\frac{1}{2}''$

Mounting Position Any

Base Medium Shell Magnal 11-Pin


Basing Designation for BOTTOM VIEW 11N

Pin 1-Heater

Pin 2-No Connection

Pin 3-Deflecting
Electrode DJ₁

Pin 4-Anode No.1

Pin 5-Internal Con.
Do not usePin 6-Deflecting
Electrode DJ₄Pin 7-Anode No.2,
Grid No.2Pin 8-Deflecting
Electr. DJ₂Pin 9-Deflecting
Electr. DJ₃

Pin 10-Grid No.1

Pin 11-Heater,
Cathode*DJ₁ and DJ₂ are nearer the screen**DJ₃ and DJ₄ are nearer the base*

With DJ₁ positive with respect to DJ₂, the spot is deflected toward pin 4. With DJ₃ positive with respect to DJ₄, the spot is deflected toward pin 1.

The angle between the trace produced by DJ₃ and DJ₄ and its intersection with the plane through the tube axis and pin 1 does not exceed 100°.

The angle between the trace produced by DJ₃ and DJ₄ and the trace produced by DJ₁ and DJ₂ is $90^\circ \pm 30^\circ$.



5BP1-A

HIGH-VACUUM CATHODE-RAY TUBE

(continued from preceding page)

Maximum Ratings, Absolute Values:

ANODE-No.2 & GRID-No.2 VOLTAGE.	2200 <i>max.</i>	volts
ANODE-No.1 VOLTAGE.	1100 <i>max.</i>	volts
GRID-No.1 (CONTROL ELECTRODE) VOLTAGE:		
Negative Value.	125 <i>max.</i>	volts
Positive Value.	0 <i>max.</i>	volts
PEAK VOLTAGE BETWEEN ANODE No.2 AND ANY DEFLECTING ELECTRODE	550 <i>max.</i>	volts

Typical Operation:

Anode-No.2 & Grid-No.2 Voltage*	1500	2000	. . .	volts
Anode-No.1 Volt. for Focus at 75% of Grid-No.1 Volt. for Cutoff [•]	337	450	. . .	volts
Grid-No.1 Volt. for Visual Cutoff [#]	-30	-40	. . .	volts
Max. Anode-No.1 Current Range [▲]	Between -50 and +10 μ amp.			

Deflection Sensitivity:

DJ ₁ and DJ ₂	0.404	0.303	. .	mm/v dc
DJ ₃ and DJ ₄	0.446	0.334	. .	mm/v dc

Deflection Factor:**

DJ ₁ and DJ ₂	63	84	. .	v dc/in.
DJ ₃ and DJ ₄	57	76	. .	v dc/in.

* Brilliance and definition decrease with decreasing anode-No.2 voltage. In general, anode-No.2 voltage should not be less than 1500 volts.

• Individual tubes may require between +25% and -30% of the values shown with grid-No.1 voltages between zero and cutoff.

Visual extinction of stationary focused spot. Supply should be adjustable to $\pm 50\%$ of these values.

▲ See curve for average values.

** Individual tubes may vary from these values by $\pm 17\%$.

Spot Position:

The undeflected focused spot will fall within a 15-mm square centered at the geometric center of the tube face and having one side parallel to the trace produced by DJ₁ and DJ₂. Suitable test conditions are: anode-No.2 voltage, 1500 volts; anode-No.1 voltage, adjusted for focus; deflecting-electrode resistors, 1 megohm each, connected to anode-No.2; the tube shielded from all extraneous fields. To avoid damage to the tube, grid-No.1 voltage should be near cutoff before application of anode voltages.

Maximum Circuit Values:

Grid-No.1-Circuit Resistance	1.5 <i>max.</i>	megohms
Impedance of Any Deflecting-Electrode Circuit at Heater-Supply Frequency	1.0 <i>max.</i>	megohm
Resistance in Any Deflecting- Electrode Circuit ^{▲▲}	5.0 <i>max.</i>	megohms

▲▲ It is recommended that all deflecting-electrode-circuit resistances be approximately equal.




5BP1-A

5BP1-A

HIGH-VACUUM CATHODE-RAY TUBE

TYPICAL OSCILLOGRAPH CIRCUIT

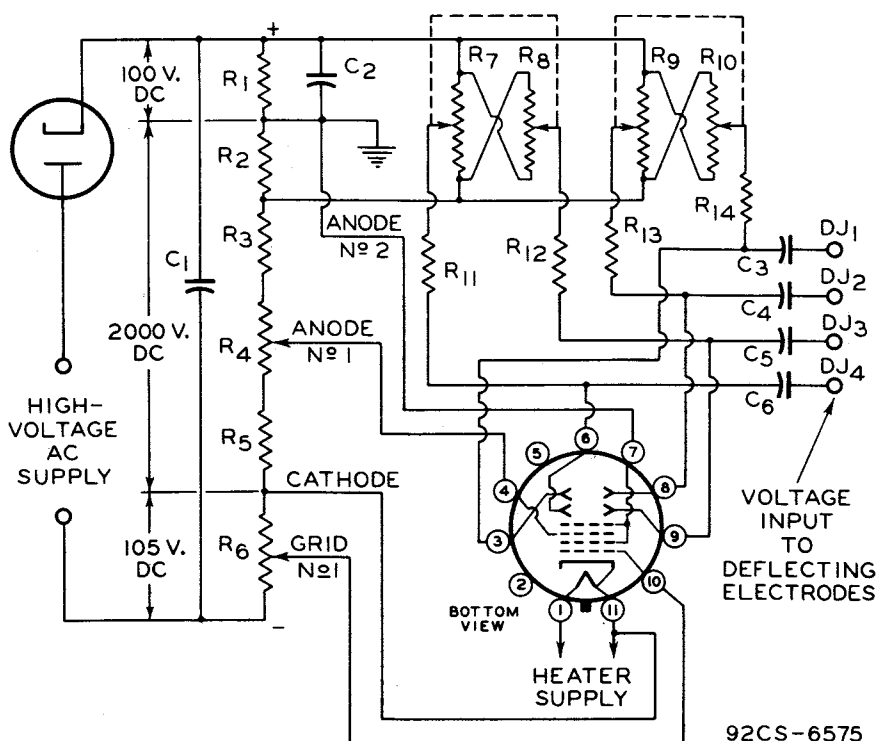

C1: 0.1 μ f
 C2: 1.0 μ f
 C3 C4 C5 C6: 0.05- μ f Blocking
 Capacitors*

R1 R2: 2 Megohms
 R3: 6 Megohms

R4: 2-Megohm Potentiometer
 R5: 1.0 Megohm
 R6: 0.5-Megohm Potentiometer
 R7 R8: Dual 5-Megohm Potentiometer
 R9 R10: Dual 5-Megohm Potentiometer
 R11 R12 R13 R14: 2 Megohms

*When cathode is grounded, capacitors should have high voltage rating; when anode No.2 is grounded, they may have low voltage rating. For dc amplifier service, deflecting electrodes should be connected direct to amplifier output. In this service, it is preferable usually to remove deflecting-electrode resistors to minimize loading effect on amplifier. In order to minimize spot defocusing, it is essential that anode No.2 be returned to a point in the amplifier system which will give the lowest possible potential difference between anode No.2 and the deflecting electrodes.

The license extended to the purchaser of tubes appears in the License Notice accompanying them. Information contained herein is furnished without assuming any obligations.

JULY 1, 1945

RCA VICTOR DIVISION
 RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


DATA 2

5BPI-A



5BPI-A

HIGH-VACUUM CATHODE-RAY TUBE

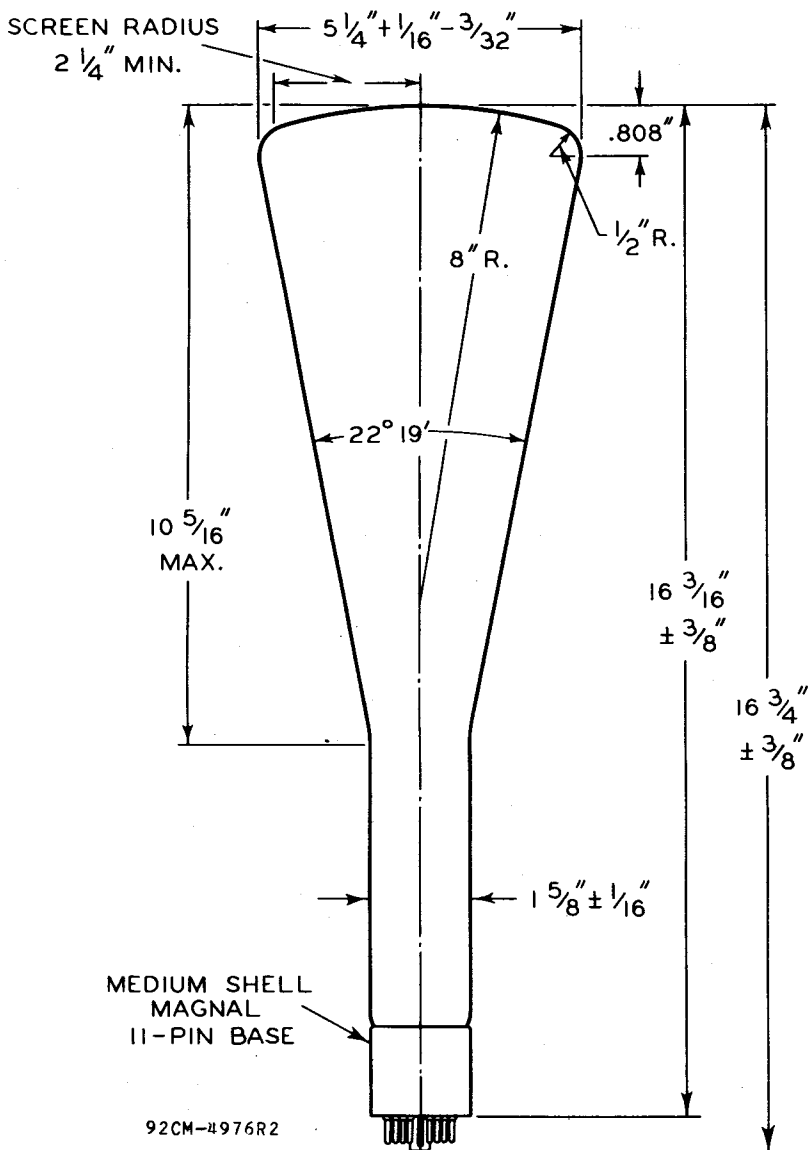

CL OF BULB WILL NOT DEVIATE MORE THAN 2°
IN ANY DIRECTION FROM PERPENDICULAR
ERECTED AT CENTER OF BOTTOM OF BASE



5BP1-A


5BP1-A

AVERAGE CHARACTERISTICS

$E_f = 6.3$ VOLTS

ANODE N^o1 VOLTS ADJUSTED TO GIVE FOCUS

CURVE	ELECTRODE CURRENT	ANODE N ^o 2 & GRID N ^o 2 VOLTS
A	ANODE N ^o 1	2000
B	ANODE N ^o 1	1500
C	ANODE N ^o 2 & GRID N ^o 2	2000
D	ANODE N ^o 2 & GRID N ^o 2	1500

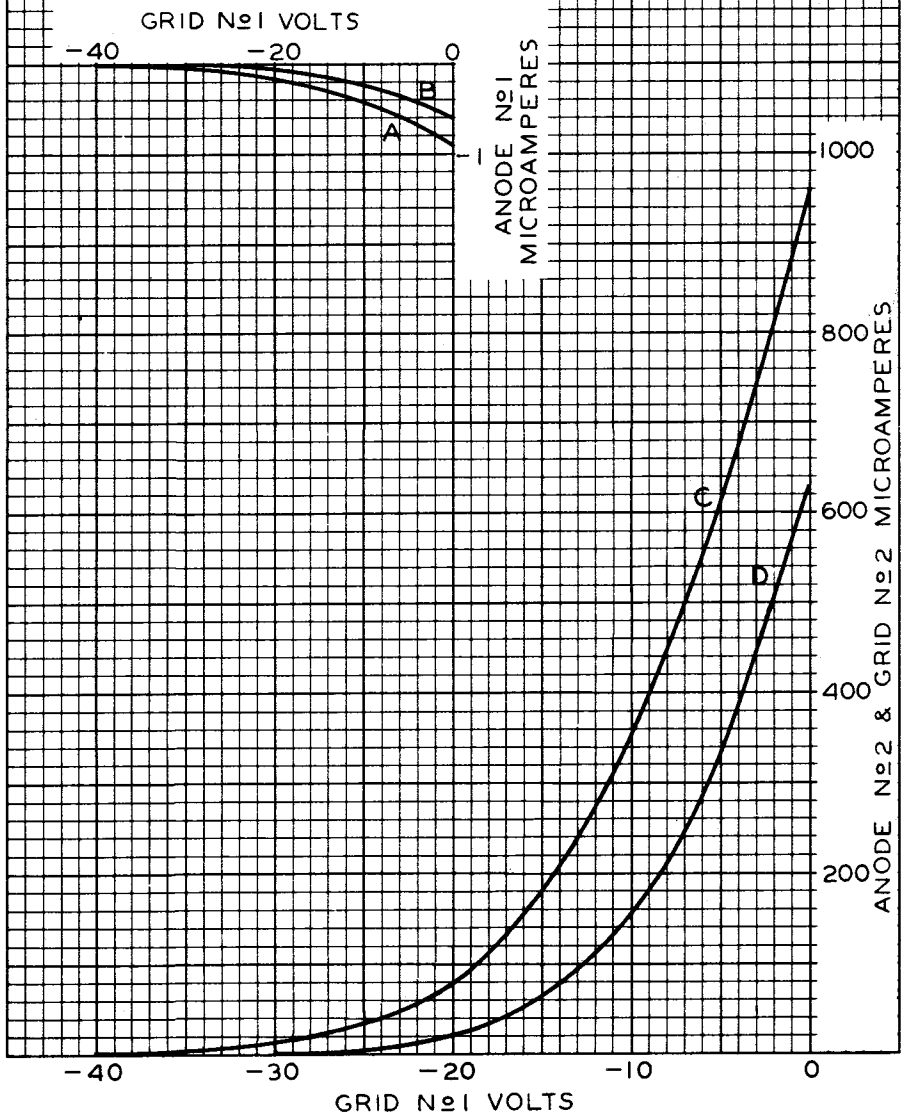

FEB. 7, 1945

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-4984R3