



7VPI

7VPI

OSCILLOGRAPH TUBE

ELECTROSTATIC FOCUS

ELECTROSTATIC DEFLECTION

DATA

General:

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts

Current 0.6 amp

Direct Interelectrode Capacitances (Approx.):

Grid No.1 to All Other Electrodes 6 μf DJ₁ to DJ₂ 3 μf DJ₃ to DJ₄ 2 μf DJ₁ to All Other Electrodes 9 μf DJ₂ to All Other Electrodes 9 μf DJ₃ to All Other Electrodes 7 μf DJ₄ to All Other Electrodes 7 μf

Faceplate Clear Glass

Phosphor (For Curves, see front of this Section) P1

Fluorescence and Phosphorescence Green

Persistence of Phosphorescence Medium

Focusing Method Electrostatic

Deflection Method Electrostatic

Overall Length 14-1/2" $\pm$ 3/8"Greatest Diameter of Bulb 7" $\pm$ 1/8"

Minimum Useful Screen Diameter 6"

Mounting Position Any

Bulb J56H

Base Medium-Shell Diheptal 12-Pin (JETEC No.B12-37)

BOTTOM VIEW

Pin 1-Heater

Pin 2-Cathode

Pin 3-Grid No.1

Pin 4-No

Connection

Pin 5-Grid No.3

Pin 7-Deflecting

Electrode

DJ₃

Pin 8-Deflecting

Electrode

DJ₄

Pin 9-Ultor•

(Grid No.2,

Grid No.4,

Collector)

Pin 10-Deflecting

Elect. DJ₂

Pin 11-Deflecting


Elect. DJ₁

Pin 12-Internal

Connection-

Do Not Use

Pin 14-Heater

*DJ₁ and DJ₂ are nearer the screen**DJ₃ and DJ₄ are nearer the base*

With DJ₁ positive with respect to DJ₂, the spot is deflected toward pin 5. With DJ₃ positive with respect to DJ₄, the spot is deflected toward pin 2.

The plane through the tube axis and pin 5 may vary from the trace produced by DJ₁ and DJ₂ by an angular tolerance (measured about the tube axis) of $\pm 10^\circ$. Angle between DJ₁-DJ₂ trace and DJ₃-DJ₄ trace is $90^\circ \pm 3^\circ$.

•: See next page.

NOV. 1, 1952

TUBE DEPARTMENT

TENTATIVE DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

7VP1



7VP1

OSCILLOGRAPH TUBE

Maximum Ratings, Design-Center Values:

ULTOR* VOLTAGE	4000 max.	volts
GRID-No.3 VOLTAGE	2000 max.	volts
GRID-No.1 VOLTAGE:		
Negative bias value	200 max.	volts
Positive bias value*	0 max.	volts
Positive peak value	2 max.	volts
PEAK VOLTAGE BETWEEN ULTOR AND		
ANY DEFLECTING ELECTRODE	750 max.	volts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode .	125 max.	volts
Heater positive with respect to cathode .	125 max.	volts

Equipment Design Ranges:

For any ultor voltage (E_u) between 1000# and 4000 volts

Grid-No.3 Voltage for Focus	27% to 40% of E_u	volts
Maximum Grid-No.1 Voltage		
for Visual Extinction of		
Undelected Focused Spot	2.8% of E_u	volts
Grid-No.3 Current	-15 to +10	μ amp
Deflection Factors:		
DJ ₁ & DJ ₂	31 to 41	v dc/in./kv of E_u
DJ ₃ & DJ ₄	25 to 34	v dc/in./kv of E_u
Spot Position	##	

Examples of Use of Design Ranges:

<i>For ultor voltage of</i>	<i>1500</i>	<i>3000</i>	<i>volts</i>
Grid-No.3 Voltage			
for Focus	400 to 600	800 to 1200	volts
Maximum Grid-No.1 Volt-			
age for Visual Extinc-			
tion of Undelected			
Focused Spot	-42	-84	volts
Deflection Factors:			
DJ ₁ & DJ ₂	47 to 62	93 to 123	volts dc/in.
DJ ₃ & DJ ₄	38 to 51	75 to 102	volts dc/in.

Maximum Circuit Values:

Grid No.1-Circuit Resistance	1.5 max.	megohms
Resistance in Any Deflecting-		
Electrode Circuit ^o	5.0 max.	megohms

* In the 7VP1, grid No.4 which has the ultor function, grid No.2, and collector are connected together within the tube and are conveniently referred to collectively as "ultor." The "ultor" in a cathode-ray tube is the electrode, or the electrode in combination with one or more additional electrodes connected within the tube to it, to which is applied the highest dc voltage for accelerating the electrons in the beam prior to its deflection.

* At or near this rating, the effective resistance of the ultor supply should be adequate to limit the ultor input power to 6 watts.

#, ##, ^o: See next page.

NOV. 1, 1952

TUBE DEPARTMENT

TENTATIVE DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY




7VP1

7VP1

OSCILLOGRAPH TUBE

- # Brilliance and definition decrease with decreasing ultor voltage. A value as low as 1000 volts is recommended only for low-velocity deflection and low ambient-light levels.
- ## With ultor voltage of 1500 volts, the center of the undeflected focused spot will fall within a circle having a 10-mm radius concentric with the center of the tube face.
- It is recommended that the deflecting-electrode-circuit resistances be approximately equal.

The 7VP1 can be used as a direct replacement for the 7JP1 in all equipment where the high-voltage supply does not provide more than 4000 volts.

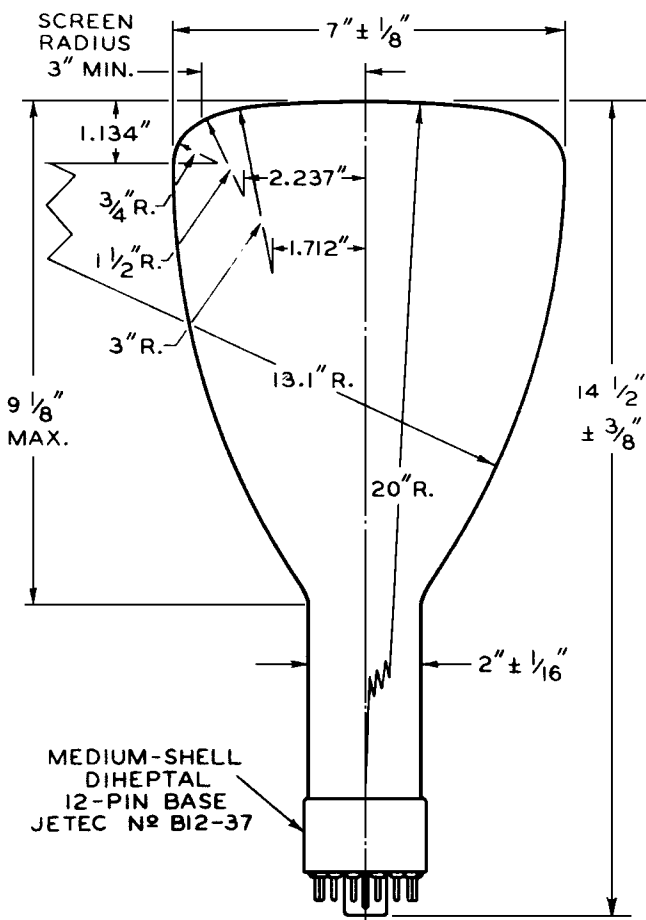

92CM-6667R1

☛ OF BULB WILL NOT DEVIATE MORE THAN 2° IN ANY DIRECTION FROM THE PERPENDICULAR ERECTED AT THE CENTER OF BOTTOM OF THE BASE.

7VP1



7VP1

AVERAGE CHARACTERISTICS

$E_f = 6.3$ VOLTS

GRID - N° 3 VOLTS ADJUSTED FOR FOCUS

CURVE	CURRENT	ULTOR VOLTS
A	ULTOR	3000
B	ULTOR	1500
C	ULTOR	1000
D	FLUORESCENT SCREEN	3000
E	FLUORESCENT SCREEN	1500
F	FLUORESCENT SCREEN	1000

