


PENTAGRID CONVERTER

Heater	Coated Unipotential Cathode	
Voltage	2.5	a-c or d-c volts
Current	0.8	amp.

For further data, see Type 6A7. The 6A7 and 2A7 are identical except for heater rating.

TYPICAL PENTAGRID CONVERTER CIRCUIT

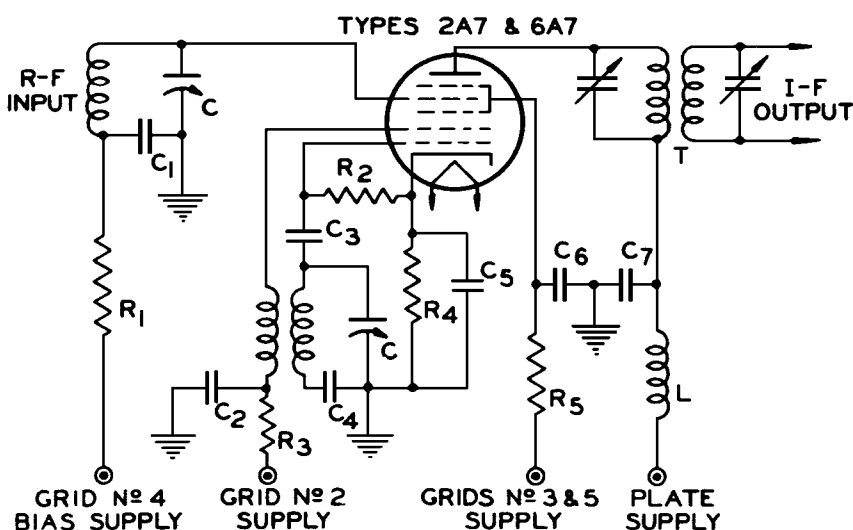

C = GANGED TUNING CONDENSER
(40 TO 350 $\mu\mu f$)

$C_1, C_2, C_5, C_6, C_7 = 0.1 \mu f$

$C_3 = 0.00025 \mu f$

C_4 = SEE TABLE BELOW

$R_1 = 250\,000$ OHMS, 0.1 WATT

$R_2 = 10\,000 - 50\,000$ OHMS, 0.1 WATT

R_3 = OSCILLATOR-ANODE (GRID NO 2)
VOLTAGE-DROPPING RESISTOR

$R_4 = 150 - 300$ OHMS, 0.1 WATT

R_5 = SCREEN (GRIDS NO 3 & 5) FILTER RESISTOR

L = 60-MILLIHENRY R-F CHOKE

T = 465-KC I-F TRANSFORMER

The license extended to the purchaser of tubes appears in the License Notice accompanying them. Information contained herein is furnished without assuming any obligations.

TYPES 2A7 AND 6A7

TYPICAL PENTAGRID CONVERTER CIRCUIT COIL DESIGN DETAILS

(continued from preceding page)

FREQUENCY BAND MEGACYCLES	0.15 TO 0.40		0.55 TO 1.5				1.5 TO 4.0		4.0 TO 10		10 TO 25	
	1		1		2		2		3		3	
ASSEMBLY №	TURN	WIRE #	TURN	WIRE #	TURN	WIRE #	TURN	WIRE #	TURN	WIRE #	TURN	WIRE #
R-F COIL (L ₁)	422	36 SSE	116	30 SSE	146	32 ENAM	36.2	30 ENAM	10.1	30 ENAM	4.4	20 ENAM
OSC. GRID COIL (L ₂)	198	36 SSE	80	30 SSE	92	32 ENAM	30.9	30 ENAM	9.7	30 ENAM	4.3	20 ENAM
OSC. PLATE COIL (L ₃)	60	36 SSE	30	30 SSE	20	32 ENAM	12	30 ENAM	12	36 ENAM	6	36 ENAM
OSC. TRACKING COND. (C ₄)	117	μμf	400 μμf				1070 μμf		2900 μμf		7300 μμf	
№ 1												
MULTI-LAYER COILS			SINGLE-LAYER COILS						SINGLE-LAYER COILS			
GRID №1 CATHODE B+ GRID №2			CATHODE GRID №2						GRID №1 CATHODE B+ GRID №2			