



7027

7027

BEAM POWER TUBE*For high-fidelity audio-amplifier applications***GENERAL DATA****Electrical:**

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts

Current 0.9 amp

Direct Interelectrode Capacitances:⁰Grid No.1 to plate. 1.5 μf Grid No.1 to cathode & grid No.3,
grid No.2, and heater 10 μf Plate to cathode & grid No.3,
grid No.2, and heater. 7.5 μf **Characteristics, Class A₁ Amplifier:**

Plate Voltage 250 volts

Grid-No.2 (Screen-Grid) Voltage 250 volts

Grid-No.1 (Control-Grid) Voltage. -14 volts

Plate Resistance (Approx.) 22500 ohms

Transconductance. 6000 μmhos

Plate Current 72 ma

Grid-No.2 Current 5 ma

Mechanical:

Operating Position. Any

Maximum Overall Length. 4.62"

Maximum Seated Length 4.06"

Maximum Diameter. 1.63"

Bulb. T12

Base. Small-Wafer Octal 8-Pin
with Sleeve (JETEC No.B8-191)

Basing Designation for BOTTOM VIEW. 8HY


Pin 1-Grid No.2

Pin 2-Heater

Pin 3-Plate

Pin 4-Grid No.2

Pin 5-Grid No.1



Pin 6-Grid No.1

Pin 7-Heater

Pin 8-Cathode,
Grid No.3**PUSH-PULL AF POWER AMPLIFIER — Class AB₁****Maximum Ratings, Design-Center Values:**

PLATE VOLTAGE 450 max. volts

GRID-No.2 (SCREEN-GRID) VOLTAGE 400 max. volts

CATHODE CURRENT:

Peak. 400 max. ma

DC. 110 max. ma

GRID-No.2 INPUT 3.5 max. watts

PLATE DISSIPATION 25 max. watts

⁰: See next page.



7027

BEAM POWER TUBE

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode.	200 max.	volts
Heater positive with respect to cathode.	200▲ max.	volts

Typical Operation with Fixed Bias:

Values are for 2 tubes

Plate Voltage	330	400	450	volts
Grid-No.2 Voltage	330	300	350	volts
Grid-No.1 (Control-Grid) Voltage●	-24	-25	-30	volts
Peak AF Grid-No.1-to-Grid-No.1 Voltage	48	50	60	volts
Zero-Signal Plate Current . . .	122	102	95	ma
Max.-Signal Plate Current . . .	184	152	194	ma
Zero-Signal Grid-No.2 Current .	5.6	6	3.4	ma
Max.-Signal Grid-No.2 Current .	18.5	17	19.2	ma
Effective Load Resistance (Plate to plate).	4500	6600	6000	ohms
Total Harmonic Distortion . . .	1	2	1.5	%
Max.-Signal Power Output. . . .	31.5	34	50	watts

Typical Operation with Cathode Bias:

Values are for 2 tubes

Plate-Supply Voltage.	400	380	volts
Grid-No.2 Supply Voltage. . . .	300	380	volts
Cathode Resistor.	200	180	ohms
Peak AF Grid-No.1-to-Grid-No.1 Voltage	57	68.5	volts
Zero-Signal Plate Current . . .	112	138	ma
Max.-Signal Plate Current . . .	128	170	ma
Zero-Signal Grid-No.2 Current .	7	5.6	ma
Max.-Signal Grid-No.2 Current .	16	20	ma
Effective Load Resistance (Plate to plate).	6600	4500	ohms
Total Harmonic Distortion . . .	2	3.5	%
Max.-Signal Power Output. . . .	32	36	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:●

For fixed-bias operation.	0.1 max.	megohm
For cathode-bias operation.	0.5 max.	megohm

PUSH-PULL AF POWER AMPLIFIER — Class AB₁

Grid No.2 of each tube connected to tap on
plate winding of output transformer

Maximum Ratings, Design-Center Values:

PLATE AND GRID-No.2 (SCREEN-GRID)

SUPPLY VOLTAGE.	450 max.	volts
-------------------------	----------	-------

○, ▲, ●: See next page.



7027

7027

BEAM POWER TUBE

CATHODE CURRENT:

Peak.	400	max.	ma
DC.	110	max.	ma
GRID-No.2 INPUT	3	max.	watts
PLATE DISSIPATION	25	max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode.	200	max.	volts
Heater positive with respect to cathode.	200▲	max.	volts

Typical Operation:

Values are for 2 tubes

Plate-Supply Voltage.	410	volts
Grid-No.2 Supply Voltage.	*	volts
Cathode Resistor.	220	ohms
Peak AF Grid-No.1-to-Grid-No.1 Voltage. .	68	volts
Zero-Signal Cathode Current	134	ma
Max.-Signal Cathode Current	155	ma
Effective Load Resistance (Plate to plate)	8000	ohms
Total Harmonic Distortion	1.6	%
Max.-Signal Power Output.	24	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:●	
For cathode-bias operation.	0.5 max. megohm

○ Without external shield.

▲ The dc component must not exceed 100 volts.

● The type of input coupling network used should not introduce too much resistance in the grid-No.1 circuit. Transformer- or impedance-coupling devices are recommended.


* Obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to apply 43 per cent of the plate signal voltage to grid No.2 of each output tube.

7027



7027

BEAM POWER TUBE

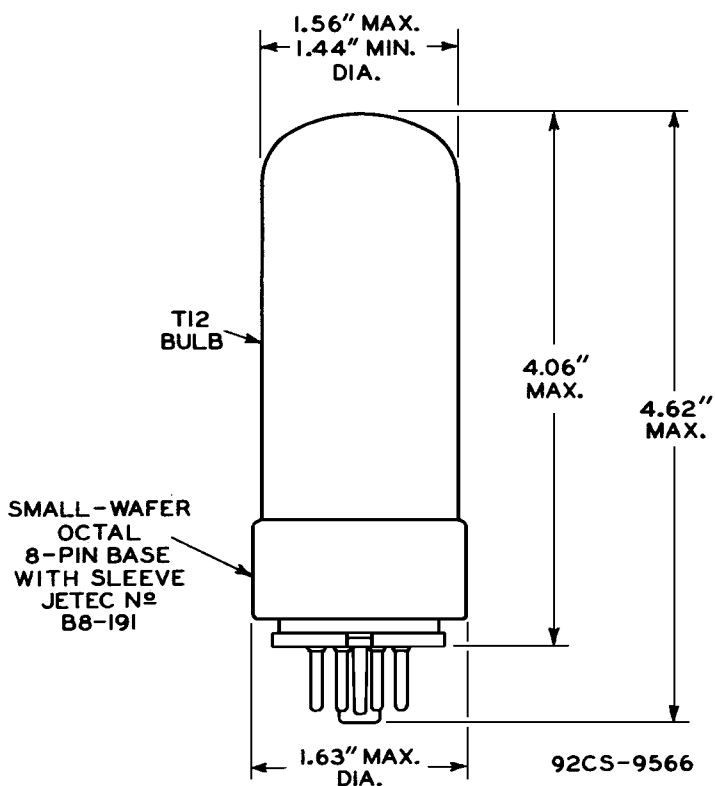



7027

7027

AVERAGE PLATE CHARACTERISTICS

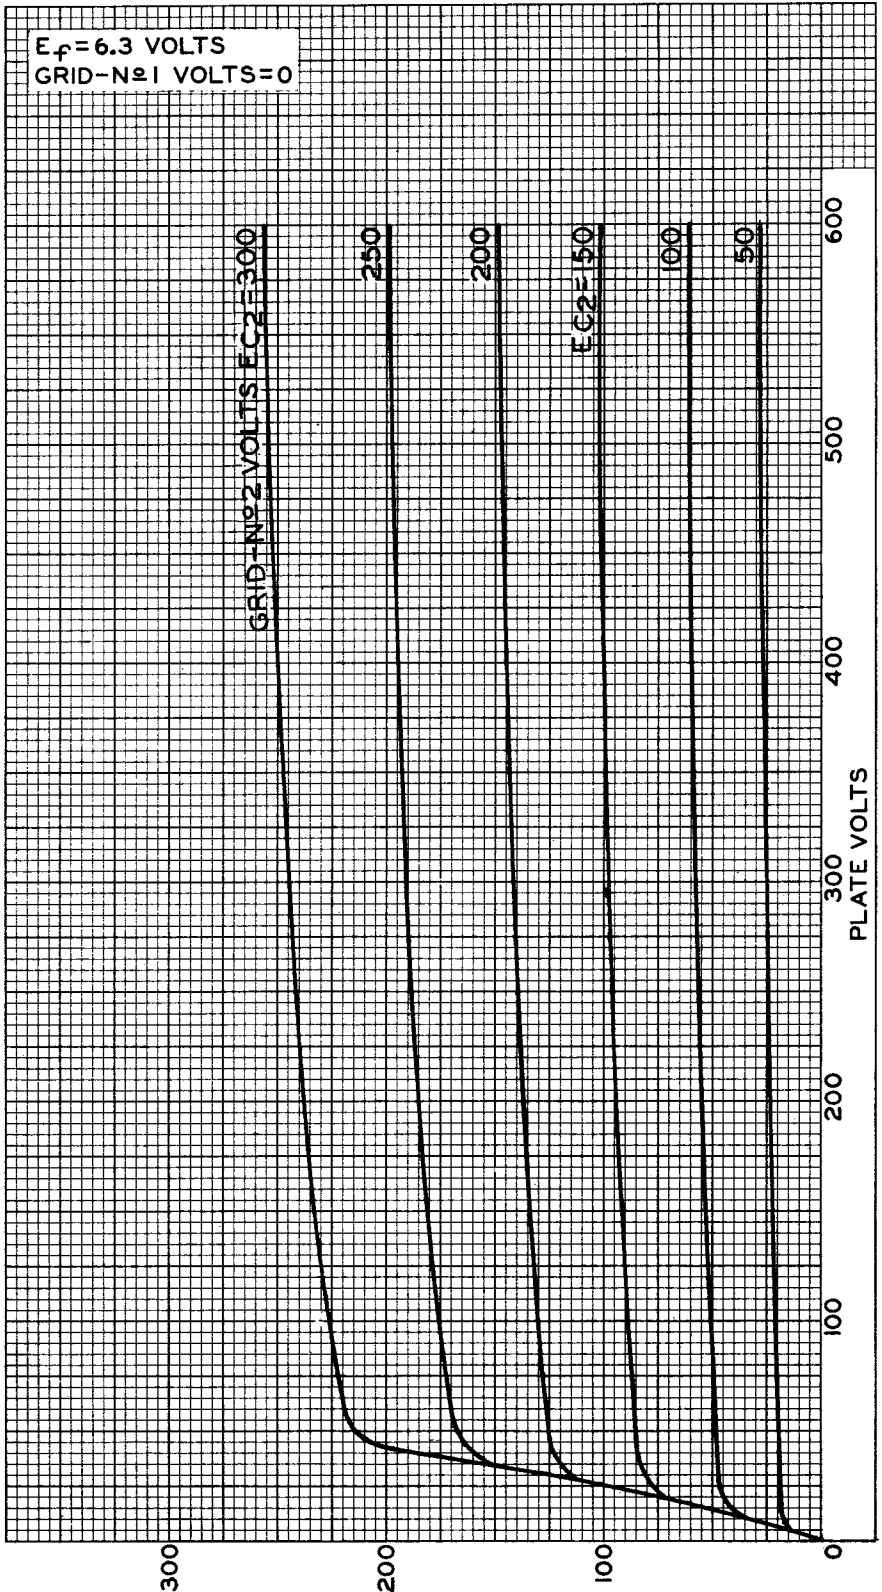


PLATE MILLIAMPERES
ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-9569

7027



7027

AVERAGE CHARACTERISTICS

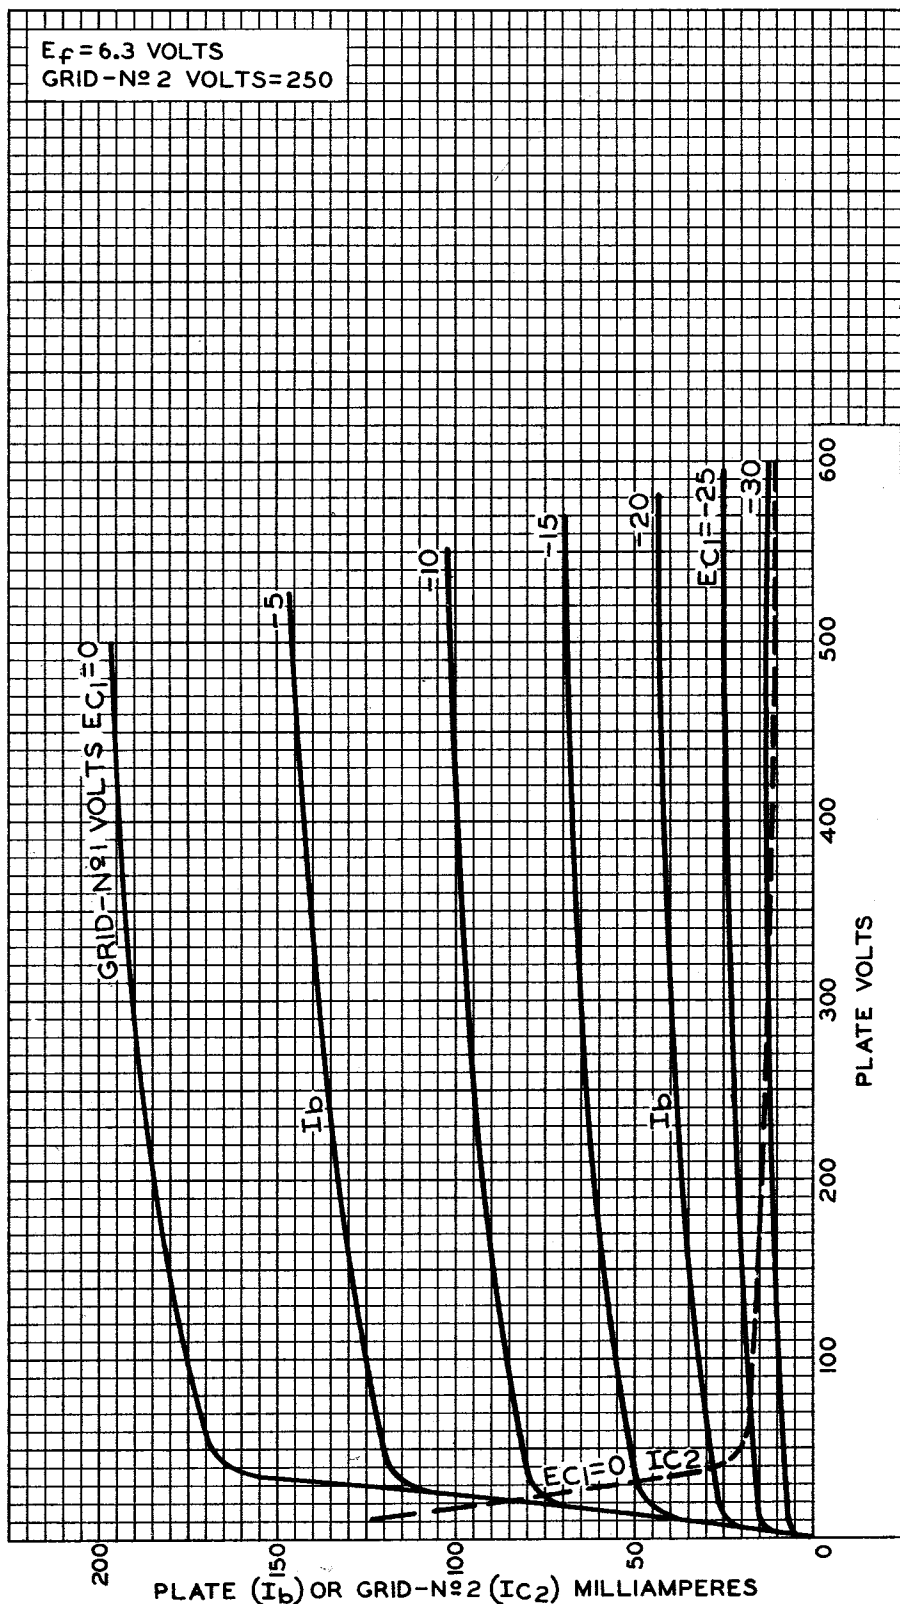

ELECTRON TUBE DIVISION

92CM-9570

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY




7027

7027

OPERATION CHARACTERISTICS PUSH-PULL CLASS AB₁

$E_f = 6.3$ VOLTS
PLATE VOLTS = 450
GRID-No 2 VOLTS = 350
GRID-No 1 VOLTS = -30
AF GRID-No 1 - TO - GRID-No 1
VOLTS (RMS) = 42.5

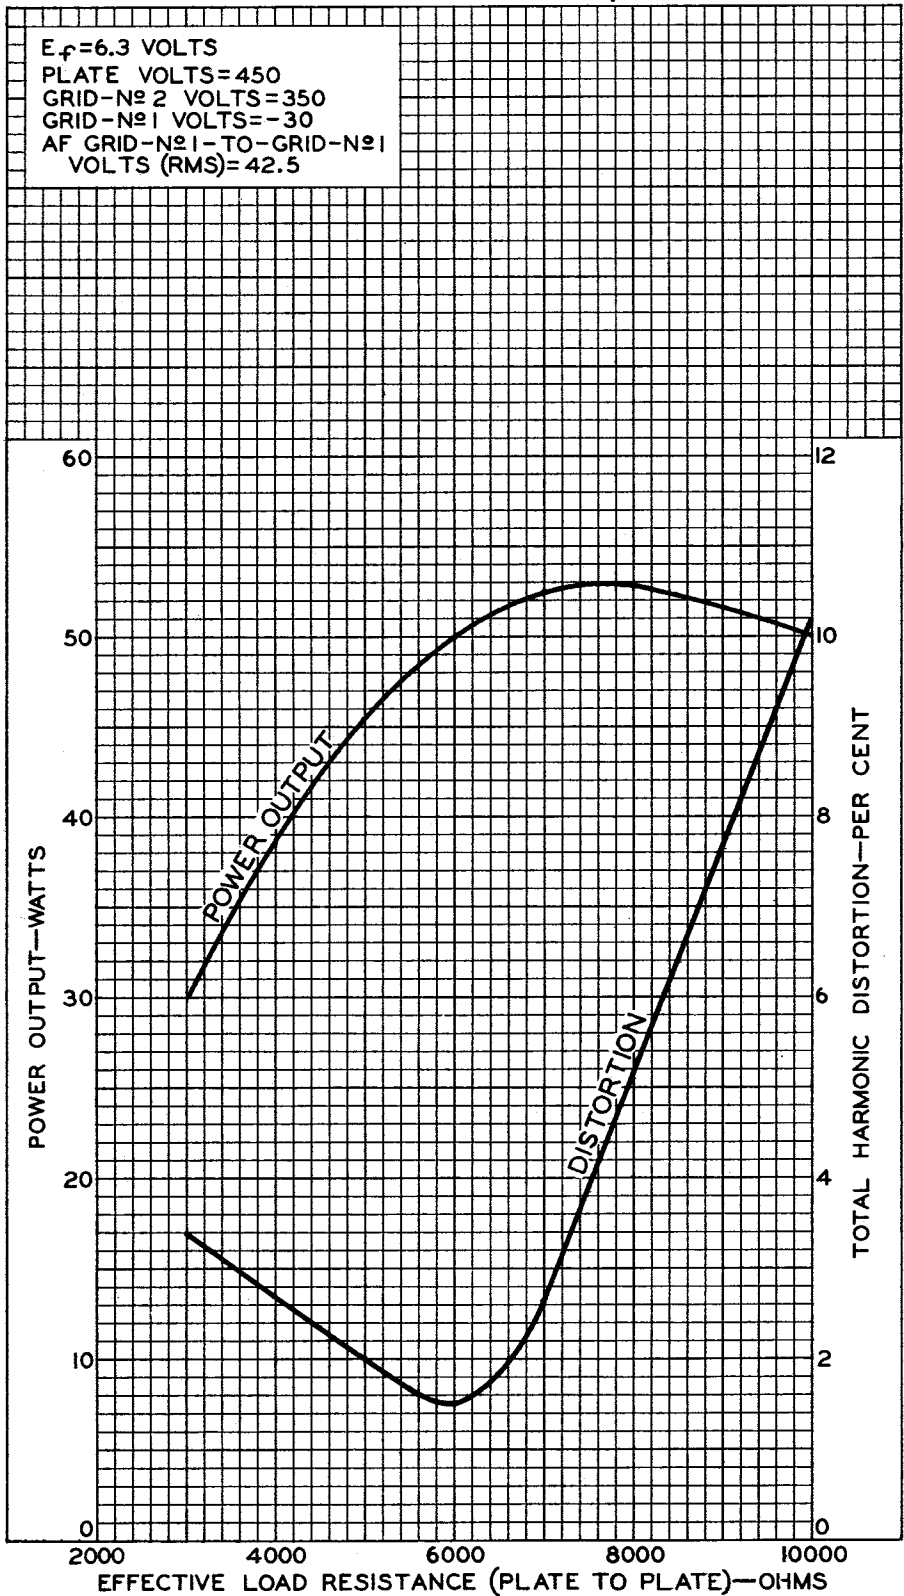

ELECTRON TUBE DIVISION

92CM-9575

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


7027



7027

AVERAGE PLATE CHARACTERISTICS TRIODE CONNECTION

$E_f = 6.3$ VOLTS
GRID No 2 CONNECTED TO PLATE.

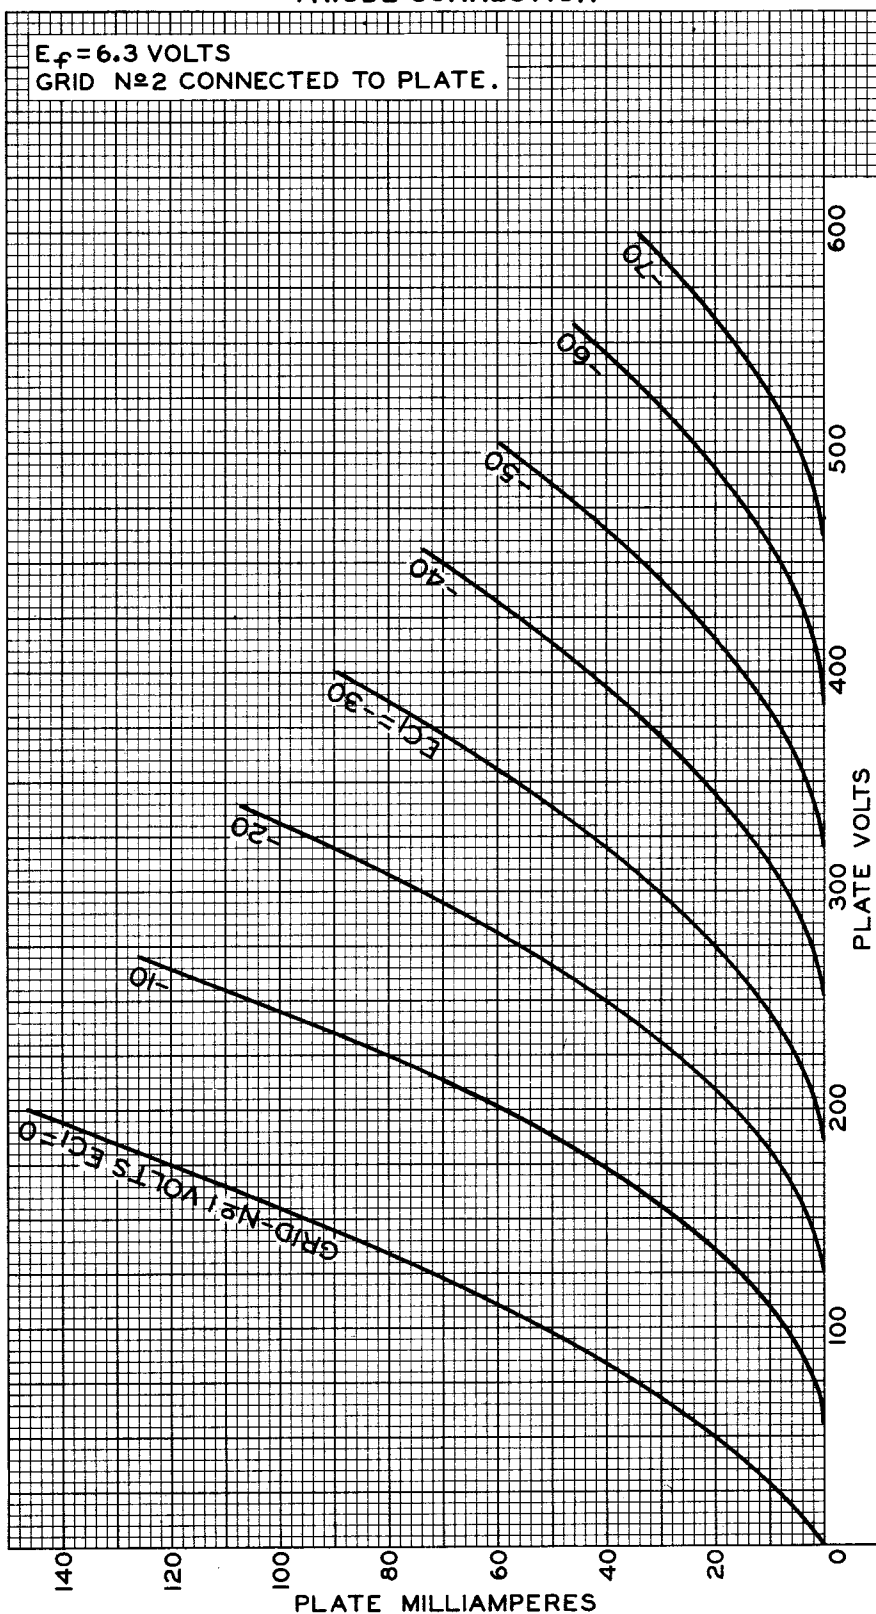

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-9568