



7MP7

7MP7

OSCILLOGRAPH TUBE

MAGNETIC FOCUS

MAGNETIC DEFLECTION

DATA

General:

Heater, for Unipotential Cathode:

Voltage. 6.3 ac or dc volts

Current. 0.6 amp

Direct Interelectrode Capacitances (Approx.):

Grid No.1 to All Other Electrodes. 6 μf Cathode to All Other Electrodes. 5 μf

Phosphor (For Curves, see front of this Section) P7

Fluorescence Blue

Phosphorescence. Greenish-Yellow

Persistence. Long

Focusing Method. Magnetic

Deflection Method. Magnetic

Deflection Angle (Approx.) 50°

Overall Length 12-3/4" $\pm$ 3/8"Greatest Diameter of Bulb. 7-3/16" $\pm$ 1/8"

Minimum Useful Screen Diameter 6"


Mounting Position. Any

Cap. Recessed Small Cavity (JETEC No.J1-21)

Base Small-Shell Duodecal 5-Pin (JETEC No.B5-57)

BOTTOM VIEW

Pin 1-Heater
Pin 2-Grid No.1
Pin 10-Grid No.2



Pin 11-Cathode
Pin 12-Heater
Cap -Grid No.3,
Collector

Maximum Ratings, Design-Center Values:

Ultor* VOLTAGE 8000 max. volts

GRID-No.2 VOLTAGE:

Positive Value (DC or Peak AC) 700 max. volts

Negative Value (DC or Peak AC) 180 max. volts

GRID-No.1 VOLTAGE:

Negative bias value. 180 max. volts

Positive bias value# 0 max. volts

Positive peak value. 2 max. volts

PEAK GRID-No.1 DRIVE FROM CUTOFF 65 max. volts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode. 125 max. volts

Heater positive with respect to cathode. 125 max. volts

- * In the 7M-types, grid No.3 which has the ultor function, and collector are connected together within the tube and are conveniently referred to collectively as "ultor". The "ultor" in a cathode-ray tube is the electrode, or the electrode in combination with one or more additional electrodes connected within the tube to it, to which is applied the highest dc voltage for accelerating the electrons in the beam prior to its deflection.

- # At or near this rating, the effective resistance of the ultor supply should be adequate to limit the ultor input power to 6 watts.

OCTOBER 1, 1951

TUBE DEPARTMENT

DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

7MP7



7MP7 OSCILLOGRAPH TUBE

Typical Operation:

Ultror Voltage*	4000	7000	volts
Grid-No.2 Voltage	250	250	volts
Grid-No.1 Voltage °	-27 to -63	-27 to -63	volts
Grid-No.2 Current	-15 to +15	-15 to +15	μamp
→ Focusing-Coil Current (DC Approx.)**	64 ± 15%	85 ± 15%	ma
→ Spot Position	-	##	

Maximum Circuit Values:

Grid-No.1-Circuit Resistance. 1.5 max. megohms

* Brilliance and definition decrease with decreasing ultor voltage. In general, the ultor voltage should not be less than 4000 volts.

° For visual extinction of undeflected, focused spot.

** For specimen focusing coil similar to JETEC Focusing Coil No.109 positioned with airgap toward faceplate and center line of air gap 2-3/4" from Reference Line (see Outline Drawing) and ultor current of 200 microamperes.

The center of the undeflected, unfocused spot will fall within a circle having 12-mm radius concentric with the center of the tube face.

→ Indicates a change


OCTOBER 1, 1951

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA



7MP7




NOTE 4: LOCATION OF DEFLECTING YOKE MUST BE WITHIN THIS SPACE.

7MP7



7MP7

AVERAGE GRID-DRIVE CHARACTERISTICS

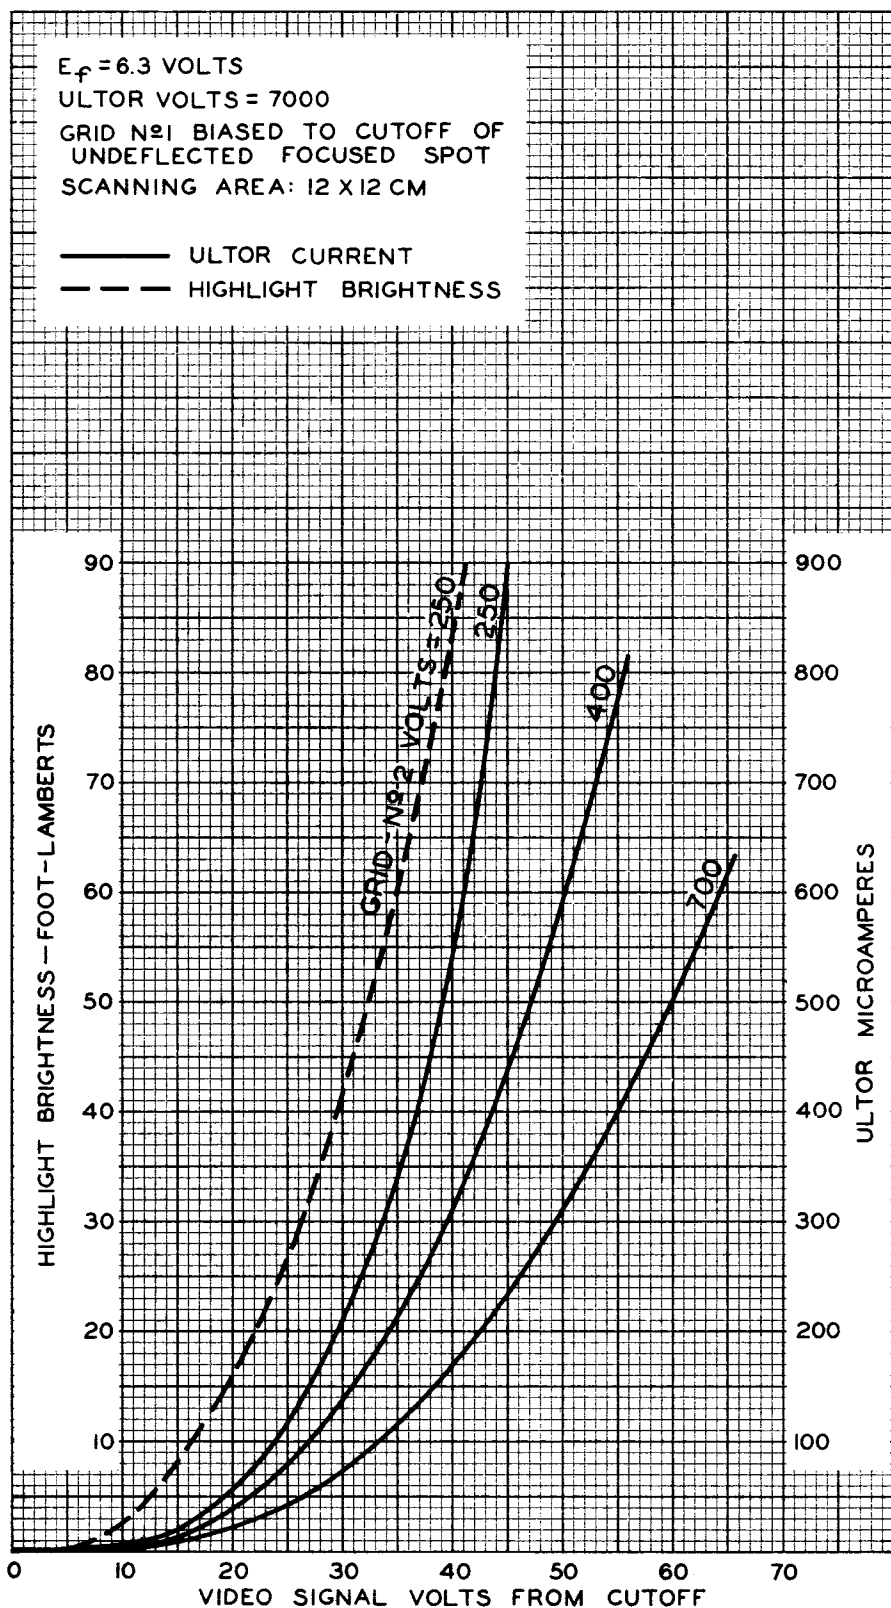

JULY 18, 1951

 TUBE DEPARTMENT
 RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7450R1