

## X-Band Low Noise Traveling Wave Tube

LD-571/(9W90)

(Tentative Data Sheet)

The LD-571 is suitable for a microwave preamplifier stage where low noise figure is required. The LD-571 has a maximum noise figure of 8.5 db and a minimum small signal gain of 20 db, and is used over the frequency band of 8,950 to 9,200 Mc/s without readjustment of tuning devices. Application of this tube include radar receivers, electrical counter-measure equipments, microwave relay systems and so on.

The special tube which operates over the expanded frequency band of 8,500 to 9,500 Mc/s is also available on request.

General CharacteristicsElectrical

Heater Voltage .....	4 to 7 V
Heater Current .....	0.7 A
Frequency range .....	8,950 to 9,200 Mc/s
Noise Figure .....	8.5 db Max.
Small Signal Gain .....	20 db Min.
Input and Output VSWR .....	2.0 Max.



Mechanical

Mounting Position .....	Any
RF Connection .....	Reduced Height of RG-52/U Special flange
Socket .....	Octal base
Collector Connector .....	Special size
Dimension .....	See Outline Drawing
Weight .....	800 grs.
Cooling .....	Natural


Typical Operation

Frequency .....	9,080 Mc/s
Heater Voltage .....	6.0 V
Heater Current .....	0.50 A
Grid Voltage .....	-5.0 V
Anode 1 Voltage .....	22.2 V
Anode 2 Voltage .....	115 V
Anode 3 Voltage .....	550 V
Helix Voltage .....	880 V
Helix Current .....	0.3 $\mu$ A
Collector Voltage .....	1200 V
Collector Current .....	200 $\mu$ A
Magnetic Field Strength .....	800 Gauss
Noise Figure .....	6.5 db
Small Signal Gain .....	25 db
Saturated Power Output .....	3.8 mW

# TYPICAL OPERATION OF LD-571

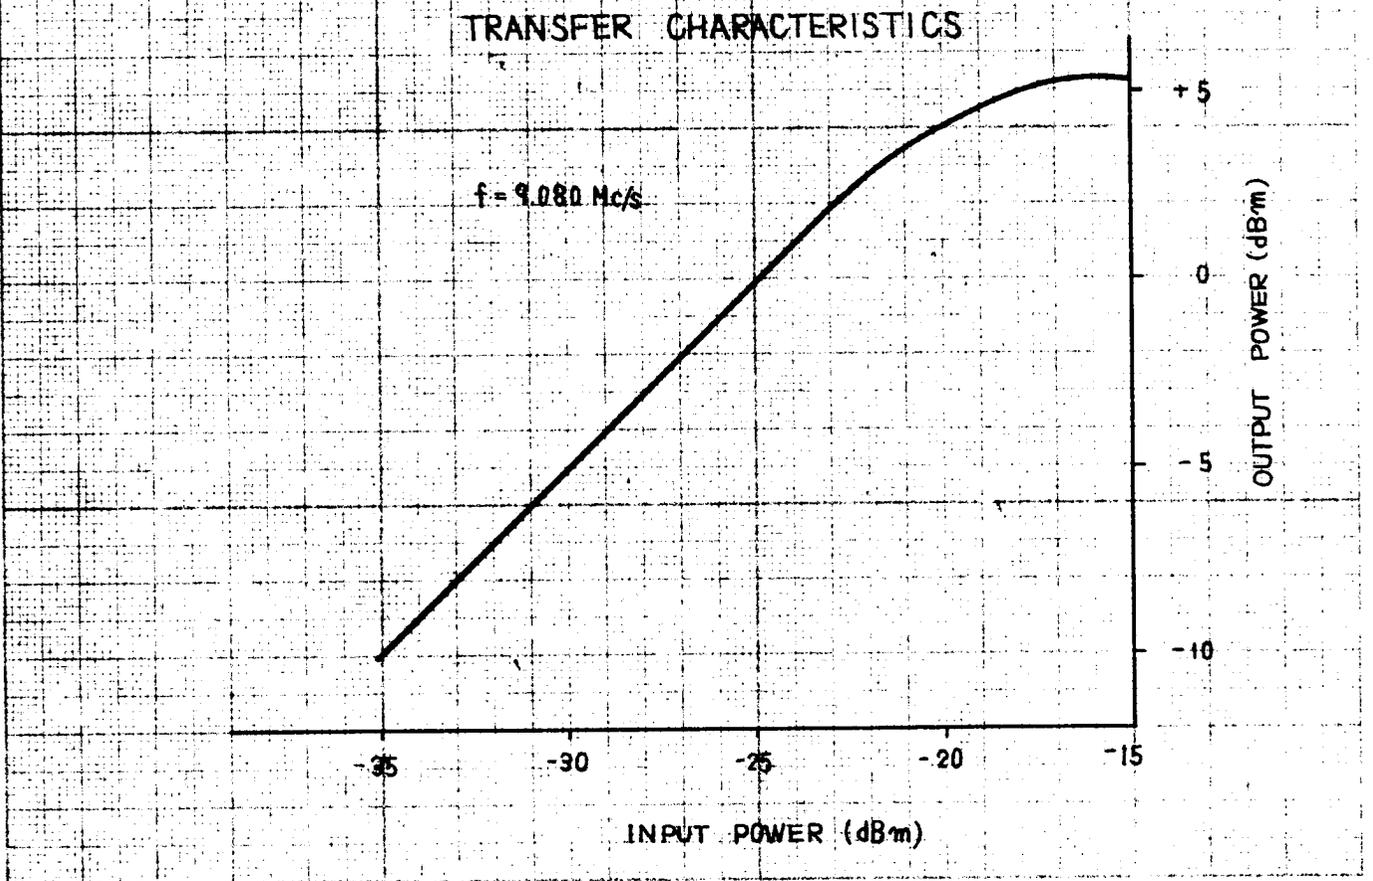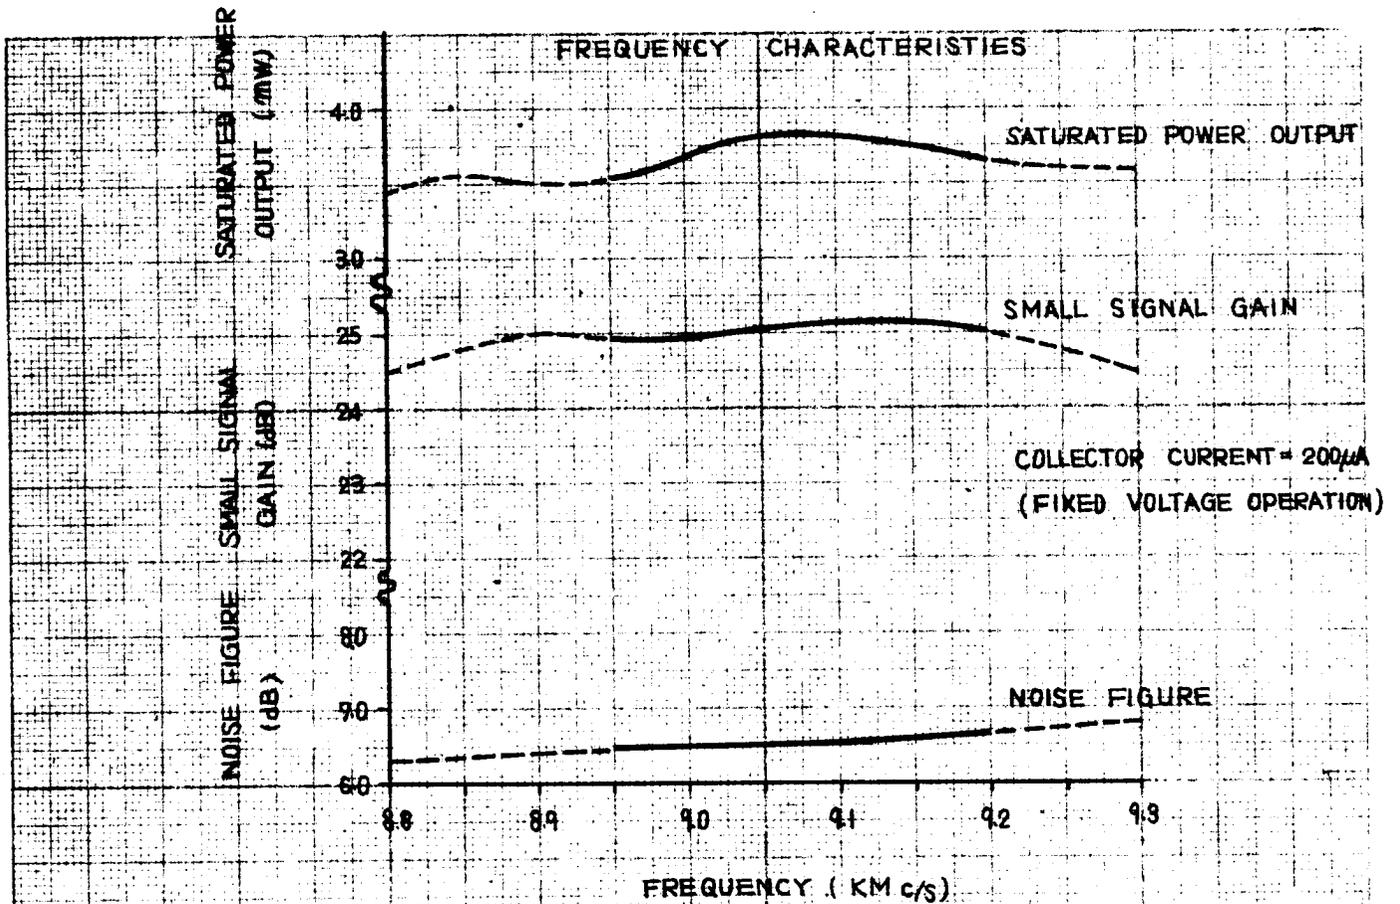

# OUTLINE OF LD-571

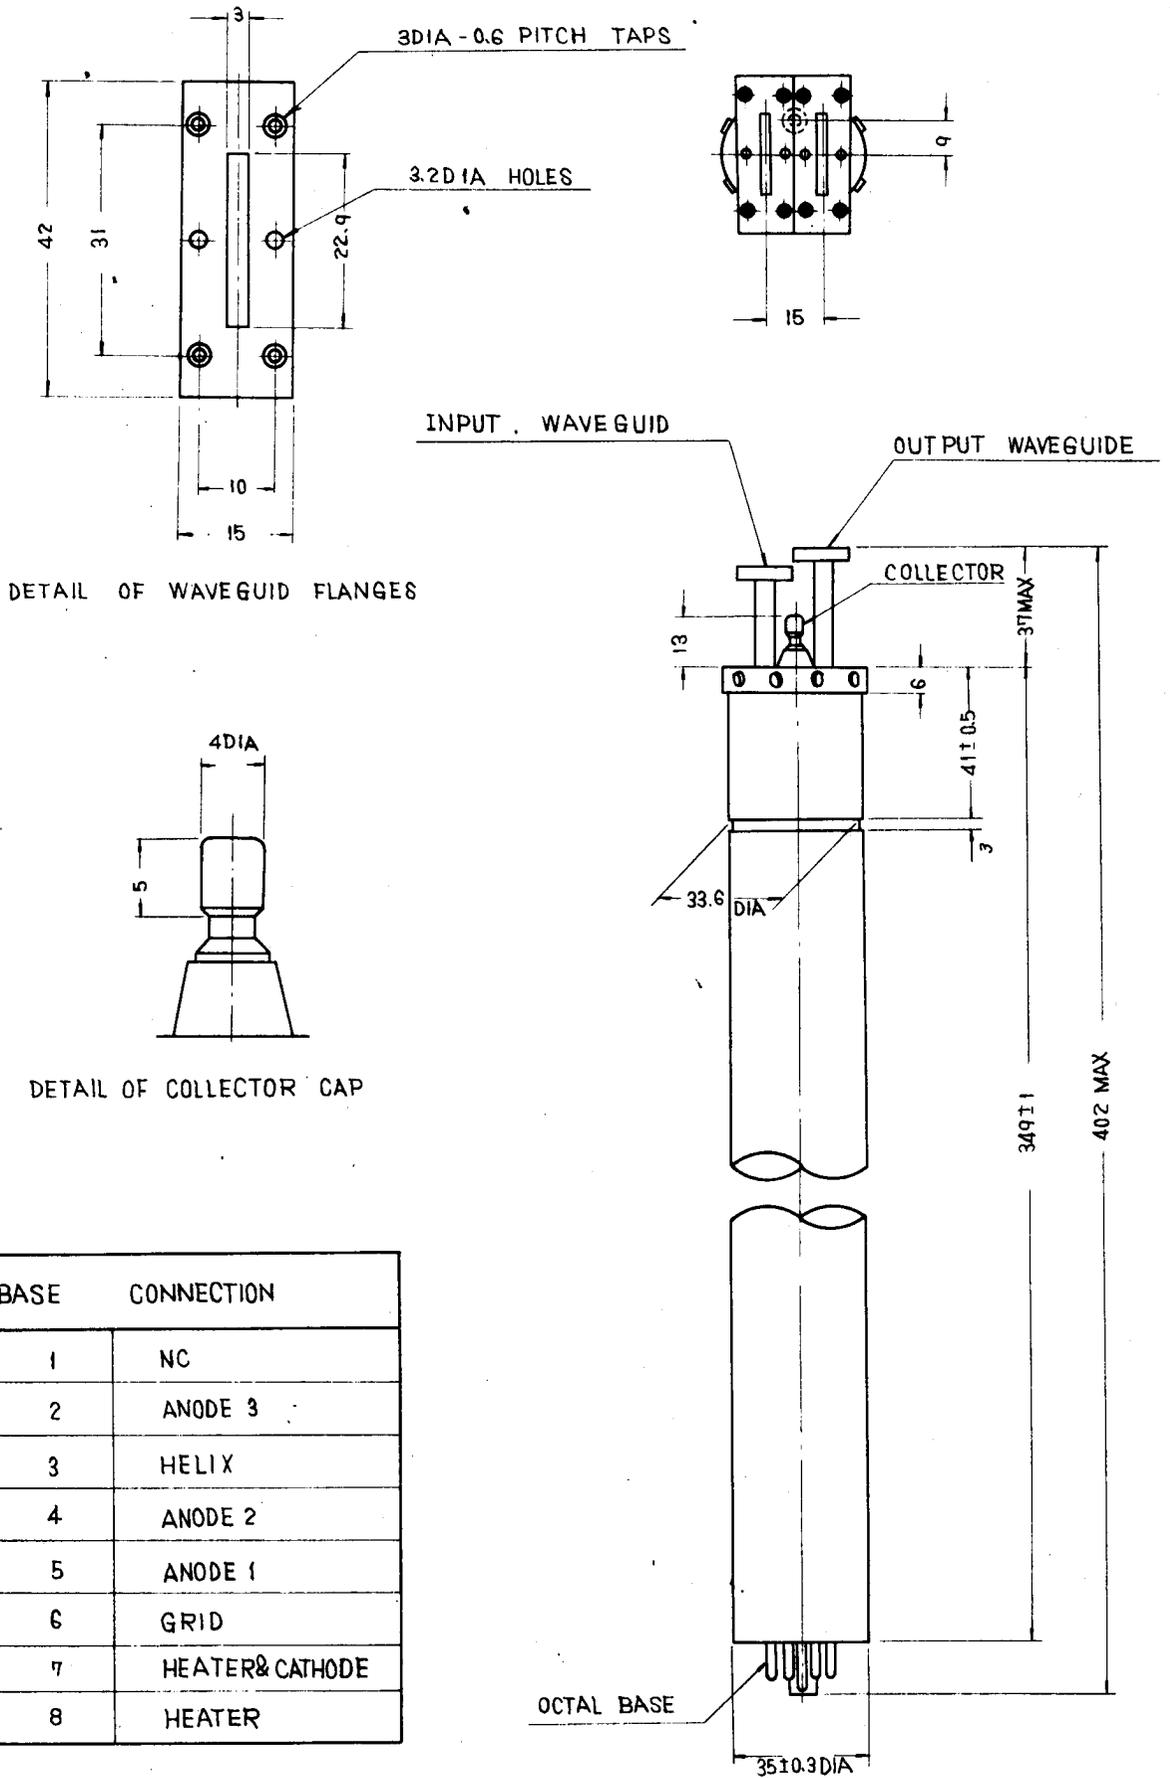

BASE	CONNECTION
1	NC
2	ANODE 3
3	HELIX
4	ANODE 2
5	ANODE 1
6	GRID
7	HEATER & CATHODE
8	HEATER

NOTE : DIMENSIONS ARE IN MILLIMETERS



TP-42786