



17JP4 KINESCOPE

RECTANGULAR GLASS TYPE

MAGNETIC FOCUS

MAGNETIC DEFLECTION

17JP4

DATA

General:

Heater, for Unipotential Cathode:

Voltage. 6.3 ac or dc volts

Current. 0.6 amp

Direct Interelectrode Capacitances:

Grid No.1 to All Other Electrodes. 6 μf

Cathode to All Other Electrodes. 5 μf

External Conductive Coating to Ultor* $\left\{ \begin{array}{l} 750 \text{ max.} \\ 500 \text{ min.} \end{array} \right. \mu\text{f}$

Faceplate, Spherical Filterglass

Light Transmission (Approx.) 66%

Phosphor (For Curves, see front of this Section). P4—Sulfide Type

Fluorescence and Phosphorescence White

Persistence of Phosphorescence Short

Focusing Method Magnetic

Deflection Method Magnetic

Deflection Angles (Approx.):

Diagonal 70°

Horizontal 65°

Vertical 50°

Ion-Trap Gun Requires External, Single-Field Magnet

Tube Dimensions:

Overall Length 19-3/16" $\pm$ 3/8"

Greatest Diagonal. 16-5/8" $\pm$ 1/8"

Greatest Width 15-3/8" $\pm$ 1/8"

Greatest Height. 12-9/32" $\pm$ 1/8" -7/32"

Minimum Screen Dimensions:

Greatest Width 14-1/4"

Greatest Height 10-3/4"

Diagonal 15-1/4"

Weight (Approx.) 18 lbs

Mounting Position. Any

Cap Recessed Small Cavity (JETEC No. J1-21)

Base Small-Shell Duodecal 5-Pin (JETEC No.B5-57)

BOTTOM VIEW


Pin 1—Heater

Pin 2—Grid No.1

Pin 10—Grid No.2

Pin 11—Cathode

Pin 12—Heater



Cap—Ultor

(Grid No.3,
Collector)

C—External
Conductive
Coating

Maximum Ratings, Design—Center Values:

ULTOR* VOLTAGE 18000 max. volts

- * In the 17JP4, grid No.3 which has the ultor function and collector are connected together within the tube and are conveniently referred to collectively as "ultor". The "ultor" in a cathode-ray tube is the electrode, or the electrode in combination with one or more additional electrodes connected within the tube to it, to which is applied the highest dc voltage for accelerating the electrons in the beam prior to its deflection.

JULY 1, 1952

TUBE DEPARTMENT

TENTATIVE DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



17JP4

KINESCOPE

GRID-No.2 VOLTAGE	410 max. volts
GRID-No.1 VOLTAGE:	
Negative bias value	125 max. volts
Positive bias value	0 max. volts
Positive peak value	2 max. volts
PEAK HEATER-CATHODE VOLTAGE:	
Heater negative with respect to cathode:	
During equipment warm-up period	
not exceeding 15 seconds	410 max. volts
After equipment warm-up period.	150 max. volts
Heater positive with respect to cathode	150 max. volts

Equipment Design Ranges:

For any ultor voltage (E_u) between 12000# and 18000 volts
and grid-No.2 voltage (E_{c2}) between 150 and 410 volts.

Grid-No.1 Voltage for Visual Extinction of Undelected Focused Spot	11% to 25.7% of E_{c2}	volts
Grid-No.2 Current	-15 to +15	μ amp
Focusing-Coil Current (DC) ^{oo}	$\left[\sqrt{\frac{E_u}{12000}} \times 96 \right] \pm 10\%$	ma
Field Strength of Single-Field Ion-Trap Magnet (Approx.) ^{**}	$\sqrt{\frac{E_u}{12000}} \times 42$	gausses
Field Strength of Adjustable Centering Magnet	0 to 8	gausses

Examples of Use of Design Ranges:

For ultor voltage of	14000	16000	volts
and grid-No.2 voltage of	300	300	volts
Grid-No.1 Voltage for Visual Extinction of Undelected Focused Spot.	-33 to -77	-33 to -77	volts
Focusing-Coil Current (DC).	104 $\pm$ 10%	110 $\pm$ 10%	ma
Ion-Trap Magnet (Rated Strength).	45	50	gausses

Maximum Circuit Values:

Grid-No.1-Circuit Resistance	1.5 max. megohms
--	------------------

Brilliance and definition decrease with decreasing ultor voltage. In general, the ultor voltage should not be less than 12000 volts.

^{oo} For specimen focusing coil similar to JETEC Focusing Coil No.109 positioned with air gap toward kinescope screen, and center line of air gap 3 inches from Reference Line (see *Outline Drawing*). The indicated current is for condition with combined grid-No.1 bias voltage and video-signal voltage adjusted to produce a highlight brightness of 30 foot-lamberts on a 14-1/4" x 10-3/4" picture area sharply focused at center of screen.

^{**} With a specimen ion-trap magnet similar to JETEC Ion-Trap Magnet No. 111 located in optimum position and rotated to give maximum brightness, the ion-trap magnet current is 82 milliamperes dc when the ultor voltage is 14000 volts and grid-No.2 voltage is 300 volts.

For x-ray shielding considerations, see sheet X-RAY
PRECAUTIONS FOR CATHODE-RAY TUBES at front of this Section

JULY 1, 1952

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



TENTATIVE DATA

17JP4



17JP4

KINESCOPE

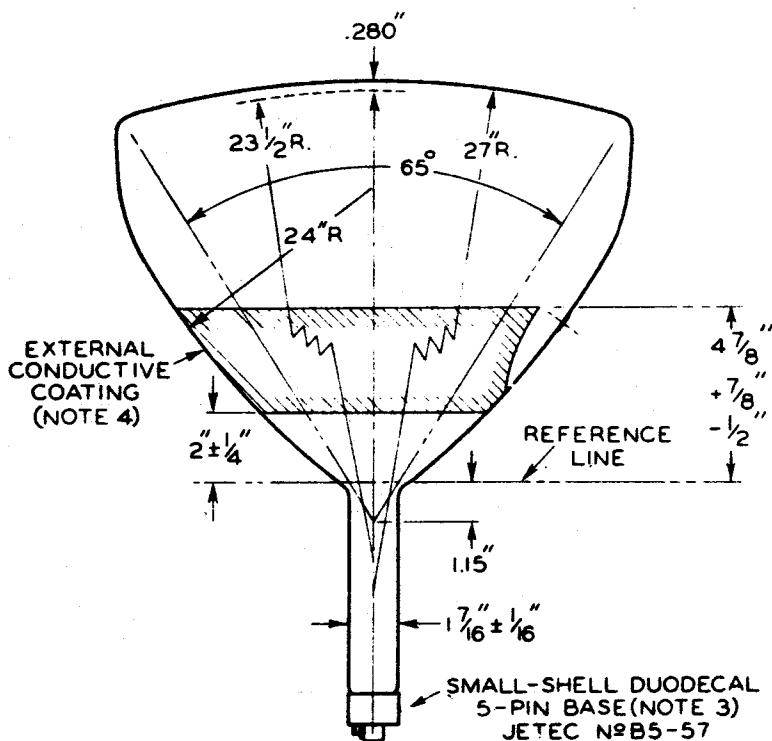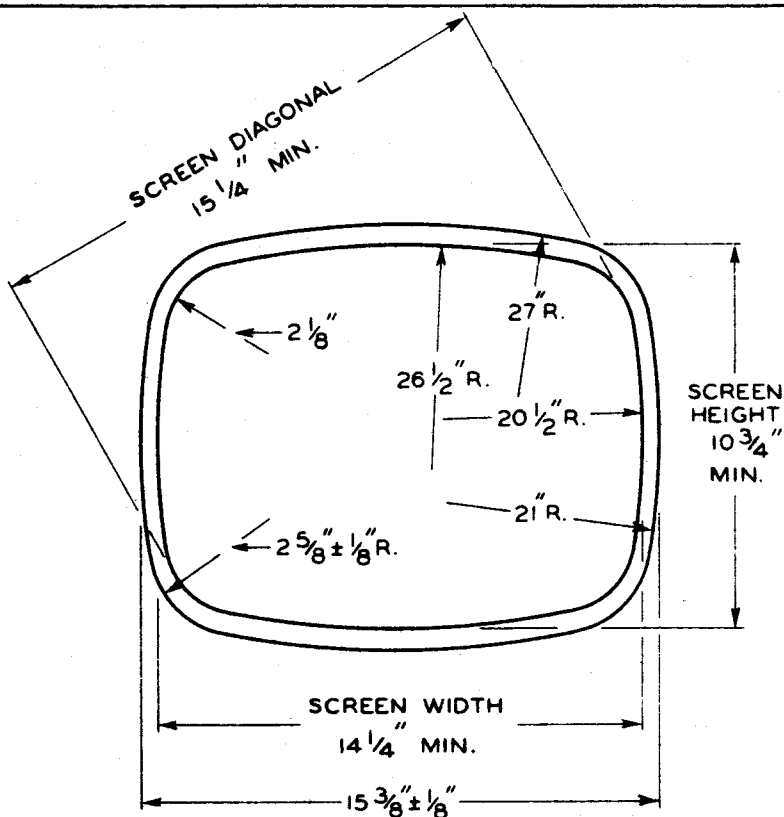

JULY 1, 1952

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



CE-7745R2A



17JP4

KINESCOPE

17JP4

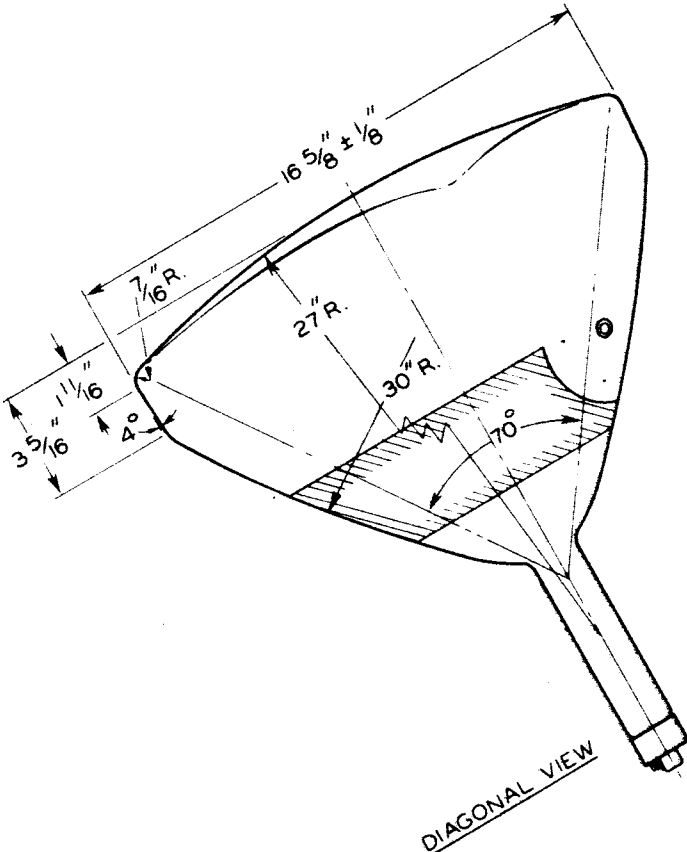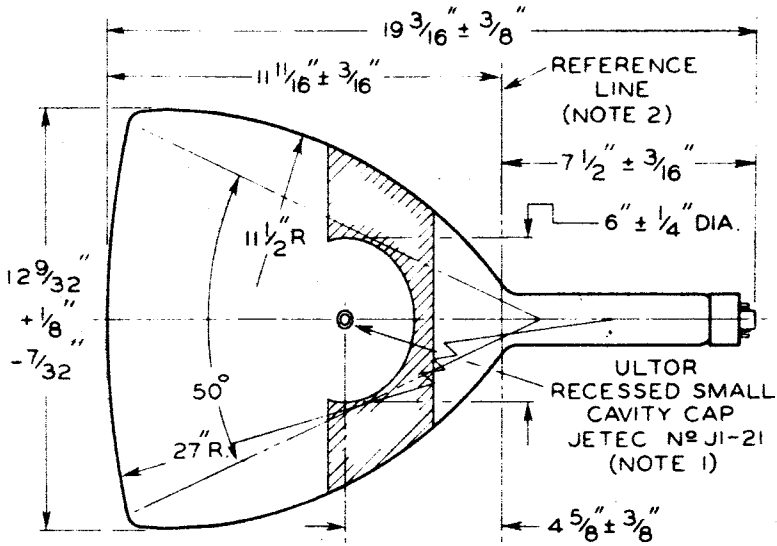

92CL-7745R2

JULY 1, 1952

TUBE DEPARTMENT

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-7745R2B

17JP4



17JP4

KINESCOPE

NOTE 1: THE PLANE THROUGH THE TUBE AXIS AND VACANT PIN POSITION No.6 MAY VARY FROM THE PLANE THROUGH THE TUBE AXIS AND ULTOR TERMINAL BY ANGULAR TOLERANCE (MEASURED ABOUT THE TUBE AXIS) OF $\pm 30^{\circ}$. ULTOR TERMINAL IS ON SAME SIDE AS VACANT PIN POSITION No.6.

NOTE 2: WITH TUBE NECK INSERTED THROUGH FLARED END OF REFERENCE-LINE GAUGE JETEC No.110 (SHOWN AT FRONT OF THIS SECTION) AND WITH TUBE SEATED IN GAUGE, THE REFERENCE LINE IS DETERMINED BY THE INTERSECTION OF THE PLANE CC' OF THE GAUGE WITH THE GLASS FUNNEL.

NOTE 3: SOCKET FOR THIS BASE SHOULD NOT BE RIGIDLY MOUNTED; IT SHOULD HAVE FLEXIBLE LEADS AND BE ALLOWED TO MOVE FREELY. BOTTOM CIRCUMFERENCE OF BASE SHELL WILL FALL WITHIN A CIRCLE CONCENTRIC WITH BULB AXIS AND HAVING A DIAMETER OF 2-3/4".

NOTE 4: EXTERNAL CONDUCTIVE COATING MUST BE GROUNDED.

JULY 1, 1952

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


CE-7745R2C



17JP4

17JP4

AVERAGE GRID-DRIVE CHARACTERISTICS

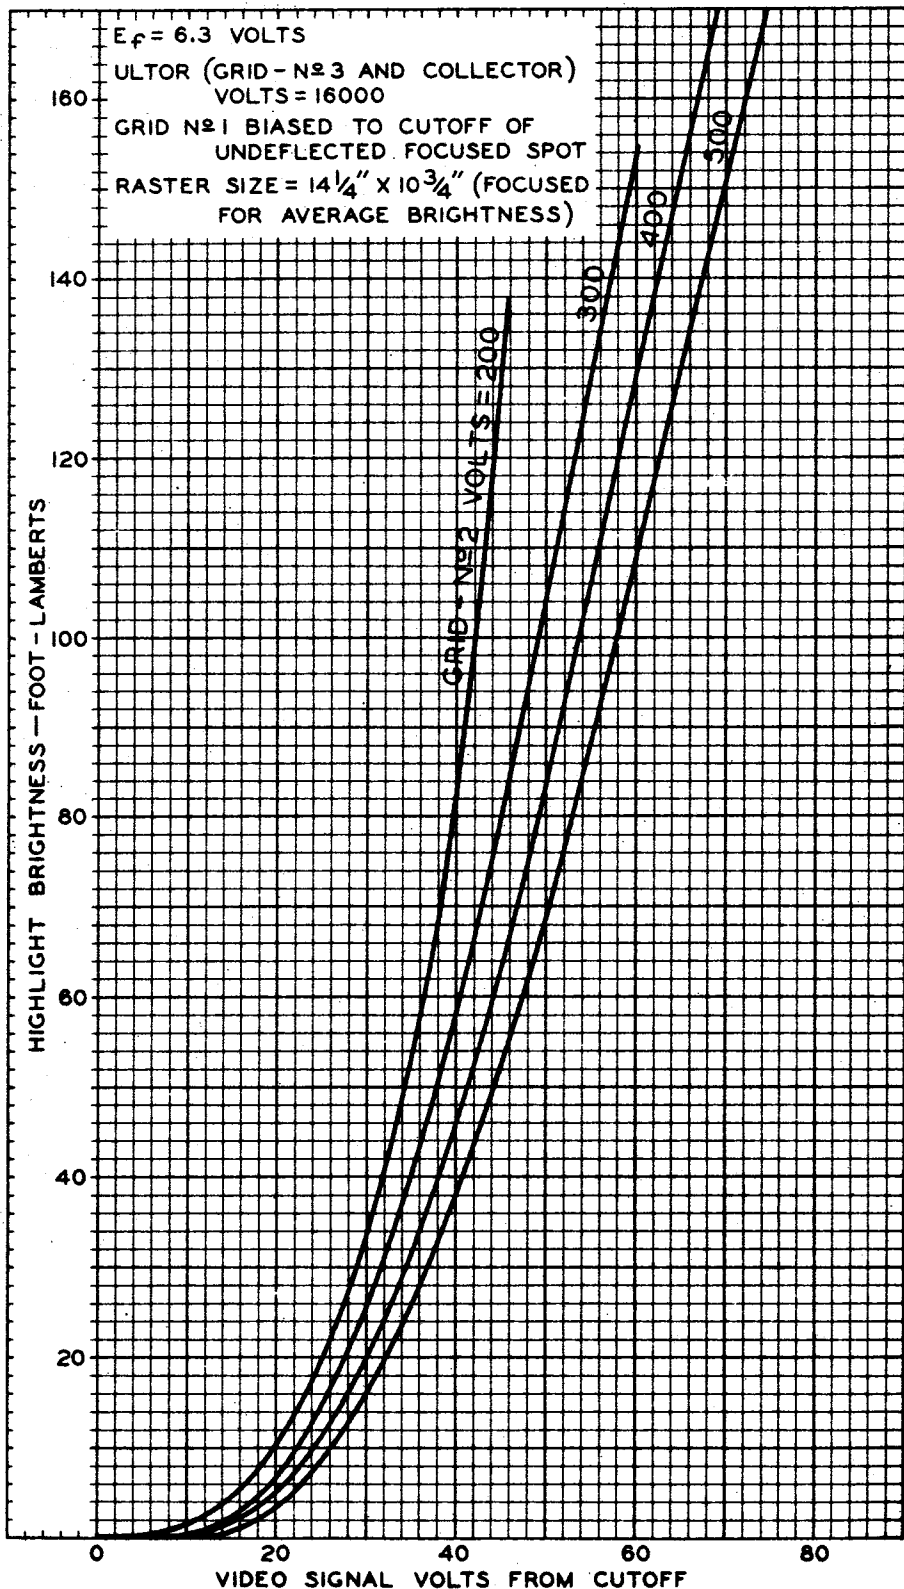



17JP4

17JP4

AVERAGE GRID-DRIVE CHARACTERISTICS

