

Color Picture Tube

INTEGRAL PROTECTIVE WINDOW

THREE-GUN, GRADED-HOLE SHADOW-MASK TYPE
ALUMINIZED TRICOLOR PHOSPHOR-DOT SCREENALL-GLASS ENVELOPE
MAGNETIC CONVERGENCEELECTROSTATIC FOCUS
MAGNETIC DEFLECTION

DATA

General:

Electron Guns, Three with Axes Tilted Toward Tube Axis.	Blue, Green, Red	
Heater, for Unipotential Cathode of Each Gun, Paralleled with Each of the Other Two Heaters within Tube:		
Current at 6.3 volts.	1.8	amp
Focusing Method	Electrostatic	
Convergence Method.	Magnetic	
Deflection Method	Magnetic	
Deflection Angles (Approx.):		
Horizontal.	70°	
Vertical.	55°	
Direct Interelectrode Capacitances (Approx.):		
Grid No.1 of any gun to all other electrodes.	10	μf
Cathode of blue gun + cathode of green gun + cathode of red gun to all other electrodes.	16	μf
Grid No.3 to all other electrodes	12	μf
External conductive Coating to ultor.	{ 2500 max. 2000 min.	{ μf μf

Optical:

Faceplate and Protective Window	Filterglass	
Light transmission (Approx.):		
Combined faceplate and protective window	43%	
Faceplate	72%	
Protective window	61%	
Screen, on Inner Surface of Faceplate:		
Type.	Aluminized, Tricolor, Phosphor-Dot	
Phosphor (Three separate phosphors, collectively) ^a	P22—All-Sulfide Type	
Fluorescence and phosphorescence of separate phosphors, respectively.	Blue, Green, Red	
Persistence of group phosphorescence.	Medium Short	
Dot arrangement	Triangular group consisting of blue dot, green dot, and red dot	
Spacing between centers of adjacent dot trios (Approx.)	0.029"	



Equipment Design Ranges:

With ultor voltage (E_{c4k} each gun) between 20000^c and 27500 volts

Grid-No.3 (Focusing Electrode)-to-Cathode (Of each gun) Voltage. 16.8% to 20% of E_{c4k} each gun volts

Grid-No.2-to-Cathode Voltage (Each gun) when circuit design utilizes grid-No.1-to-cathode voltage (E_{c1k}) at fixed value for raster cutoff. See Cutoff Design Chart

Grid-No.1-to-Cathode Voltage (Each gun) for Visual Extinction of Focused Raster when circuit design utilizes grid-No.2-to-cathode voltage (E_{c2k}) at fixed value. See Cutoff Design Chart

Variation in Raster Cutoff Between Guns in Any Tube. $\pm 21\%$ of average of highest and lowest cutoff values

Grid-No.3 Current. -45 to +45 μa

Grid-No.2 Current (Each gun). -5 to +5 μa

Percentage of Total Ultor Current Supplied by Each Gun (Average):

Red Gun Blue Gun Green Gun

To Produce White of 9300^o K + 27 M.P.C.D. (CIE Coordinates

$x = 0.281$, $y = 0.311$) 42 28 30 %

Ratios of Cathode Currents:

Red to Green			Red to Blue		
Min.	Av.	Max.	Min.	Av.	Max.

To Produce White

of 9300^o K + 27

M.P.C.D. 0.85 1.4 1.95 0.8 1.5 2.2

Maximum Raster Centering Correction

in Any Direction^d. 7/8 inch

Adjustment to be Provided by the Following Components:

Purifying Magnet:

Maximum Required Displacements of Beam Trios in Any direction with Respect to Associated

Phosphor-Dot Trios 0.005"^e

Lateral-Converging Magnet:^f

Maximum lateral shift of blue beam $\pm 1/4"$



21FKP22

Radial-Converging Magnet Assembly:

For static convergence
including compensation
for dc component of
dynamic convergence
(Each beam). Shift of $\pm 5/8$ "

Examples of Use of Design Ranges:

For ultor voltage of	20000	25000	volts
Grid-No.3 (Focusing Electrode)-to-Cathode (Of each gun) Voltage. .	3360 to 4000	1200 to 5000	volts
Grid-No.2-to-Cathode Voltage (Each gun) when circuit design utilizes grid-No.1-to-cathode voltage of -70 volts for raster cutoff.	130 to 370	130 to 370	volts
Grid-No.1-to-Cathode Voltage (Each gun) for Visual Extinction of Focused Raster when circuit design utilizes grid-No.2-to-cathode voltage of 200 volts . .	-45 to -100	-45 to -100	volts

Limiting Circuit Values:

High-Voltage Circuits:

In order to minimize the possibility of damage to the tube caused by a momentary internal arc, it is recommended that the *high-voltage power supply* and the *grid-No.3 power supply* be of the limited-energy type.

Grid-No.3 Circuit Resistance (Each gun). 7.5 max. megohms

Low-Voltage Circuits:

Effective Grid-No.1-to-Cathode-Circuit Resistance (Each gun) 0.75 max. megohm

The grid-No.2-to-heater circuit, the grid-No.1-to-heater circuit, and the cathode-to-heater circuit should each have an impedance such that their respective power sources in combination will not supply a continuous short-circuit current of more than 300 milliamperes total. Such current limitation will prevent heater burnout in case of a momentary internal arc within the tube.

- ^a For Curves, see front of this Section.
- ^b For maximum cathode life, it is recommended that the heater supply be regulated at 6.3 volts.
- ^c Brilliance and definition decrease with decreasing ultor voltage. In general, the ultor voltage should not be less than 20,000 volts.
- ^d Centering of the raster on the screen may be accomplished by passing direct current of the required value through each pair of deflecting coils. With all components properly adjusted, the raster centering correction is the distance from the undeflected focused beams to the center of the screen.



^e The equivalent raster movement is about $3/4"$.

^f Lateral converging magnet must shift the red beam and the green beam in opposite direction to the shift of the blue beam. Under conditions where the blue beam has been shifted $1/4"$, the shift of the red beam and green beam should be in the range of $1/8"$ to $3/8"$.

DEFINITIONS

Beam Trio. The red beam, green beam, and blue beam passing through a common hole in the shadow mask.

Register. Exact correspondence in position of the centers of beam trios with respect to the centers of the associated phosphor-dot trios.

Misregister. Lack of correspondence in position of the centers of the beam trios with respect to the centers of the associated phosphor-dot trios.


Displacement. Shift of the position of the beams with respect to the phosphor dots.





GENERAL CONSIDERATIONS

X-Ray Warning. Because this color picture tube is designed to be operated at ultor voltages as high as 27.5 kilovolts (Design-maximum value), shielding of this color picture tube for X-ray radiation may be needed to protect against possible injury from prolonged exposure at close range.



21FKP22

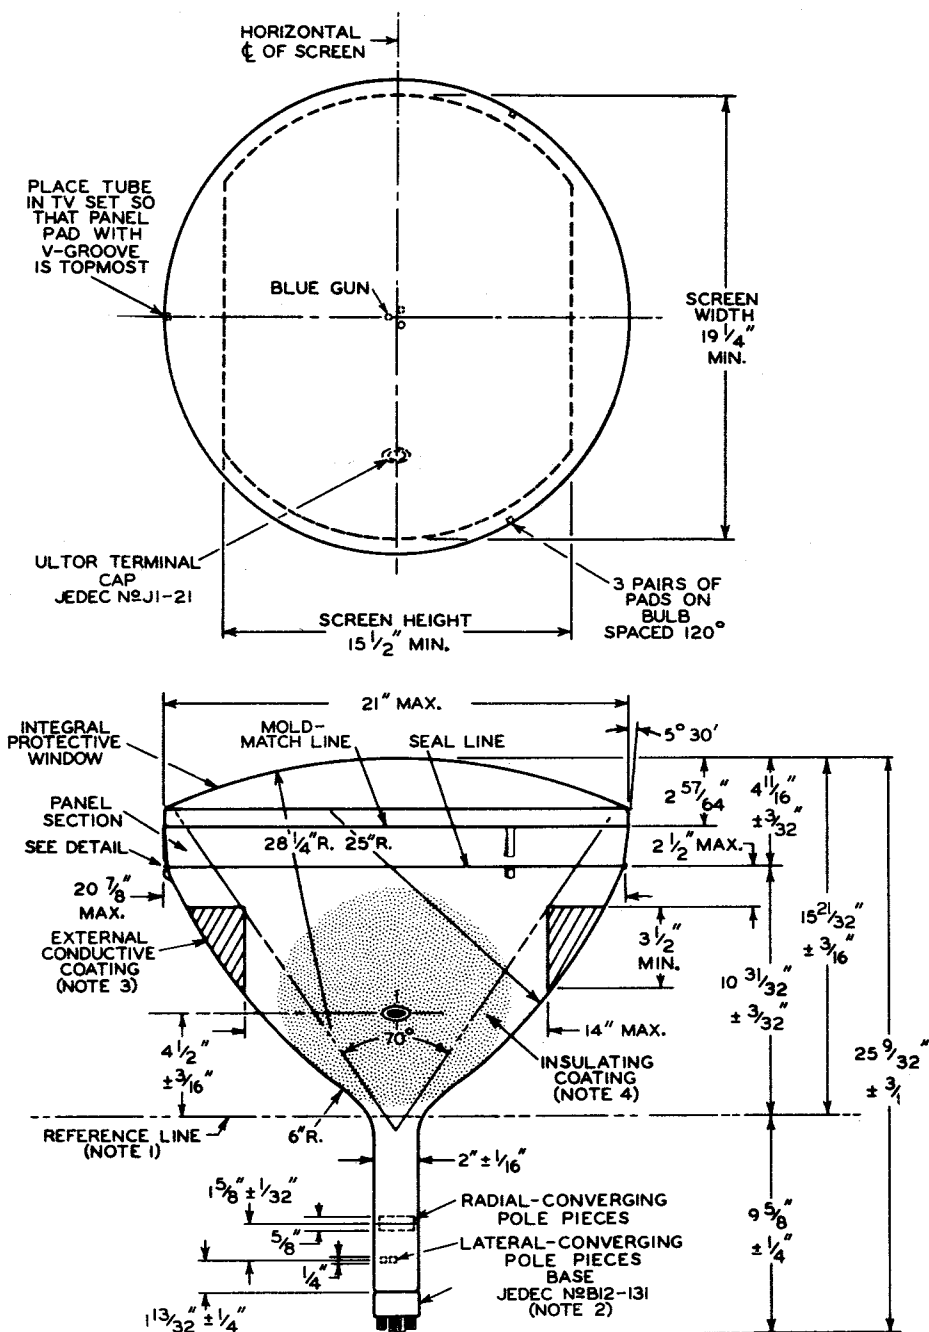

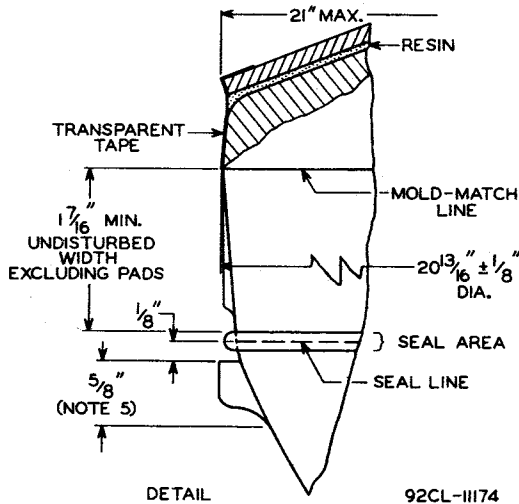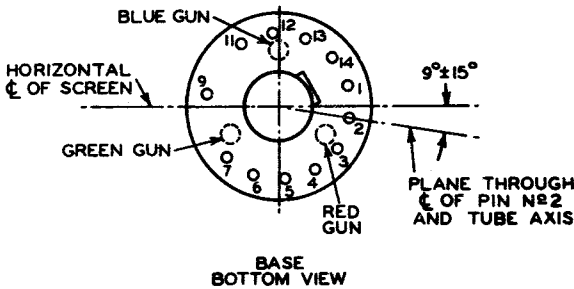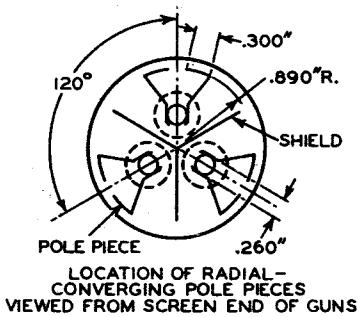

21FKP22

NOTE 1: WITH TUBE NECK INSERTED THROUGH FLARED END OF REFERENCE-LINE AND NECK-FUNNEL-CONTOUR GAUGE AND WITH TUBE SEATED IN GAUGE, THE REFERENCE LINE IS DETERMINED BY THE INTERSECTION OF THE PLANE CC' OF THE GAUGE WITH THE GLASS FUNNEL.


NOTE 2: SOCKET FOR THIS BASE SHOULD NOT BE RIGIDLY MOUNTED; IT SHOULD HAVE FLEXIBLE LEADS AND BE ALLOWED TO MOVE FREELY. BOTTOM CIRCUMFERENCE OF BASE SHELL WILL FALL WITHIN A CIRCLE CONCENTRIC WITH BULB AXIS AND HAVING A DIAMETER OF 3".

NOTE 3: THE DRAWING SHOWS THE MINIMUM SIZE AND LOCATION OF THE CONTACT BAND OF THE EXTERNAL CONDUCTIVE COATING. THE ACTUAL AREA OF THIS COATING WILL BE GREATER THAN THAT OF THE CONTACT BAND SO AS TO PROVIDE THE REQUIRED CAPACITANCE. EXTERNAL CONDUCTIVE COATING MUST BE GROUNDED.

NOTE 4: TO CLEAN THIS AREA, WIPE ONLY WITH SOFT DRY LINT-LESS CLOTH.

NOTE 5: THE MAXIMUM EFFECTIVE WIDTH OF A FUNNEL PAD IS 5/8".

REFERENCE-LINE AND NECK-FUNNEL-CONTOUR GAUGE

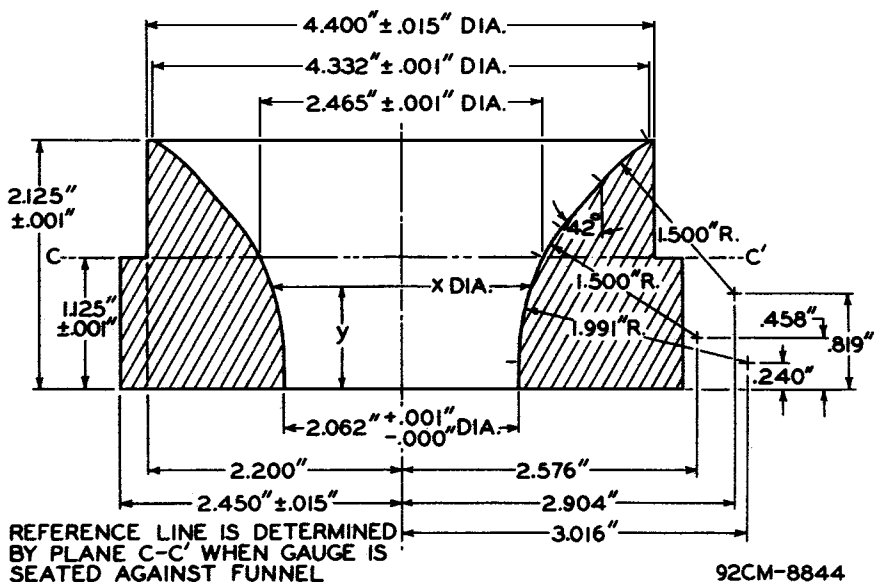

y	x
0.000"	2.062" + 0.001" - 0.000"
0.125"	2.062" + 0.001" - 0.000"
0.250"	2.062" + 0.001" - 0.000"


y	x
0.375"	2.062" + 0.001" - 0.000"
0.385"	2.062" + 0.001" - 0.000"
0.500"	2.084" ± 0.001"
0.625"	2.122" ± 0.001"

y	x
0.750"	2.182" ± 0.001 "
0.875"	2.258" ± 0.001 "
1.000"	2.352" ± 0.001 "
1.125"	2.465" ± 0.001 "
1.250"	2.604" ± 0.001 "

y	x
1.375"	2.778" ± 0.001 "
1.500"	2.990" ± 0.001 "
1.625"	3.216" ± 0.001 "
1.750"	3.440" ± 0.001 "
1.875"	3.678" ± 0.001 "
2.000"	3.958" ± 0.001 "
2.125"	4.332" ± 0.001 "




CUTOFF DESIGN CHART

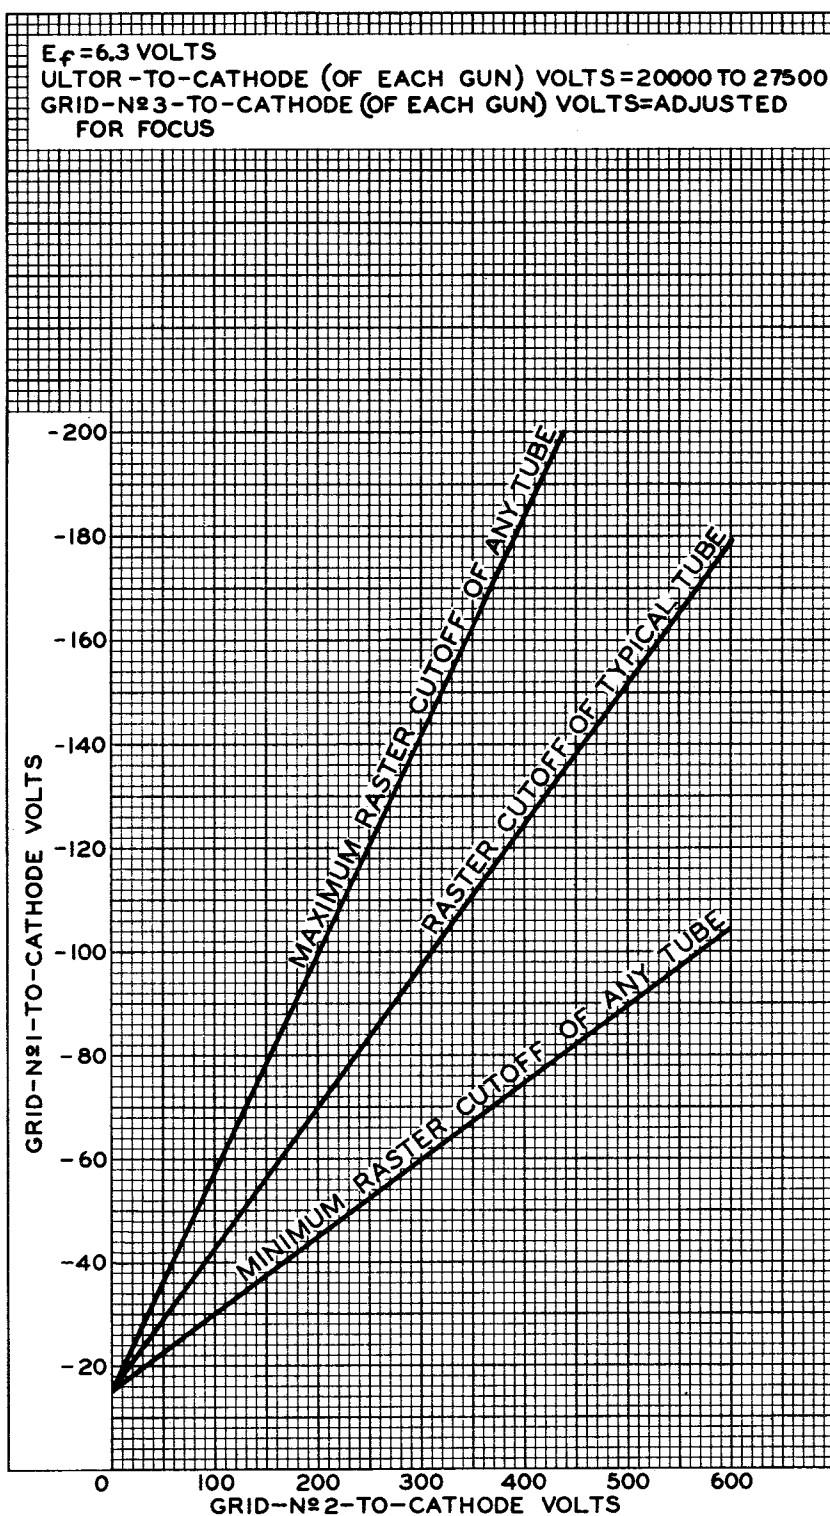

92CM-10846



TYPICAL DRIVE CHARACTERISTICS

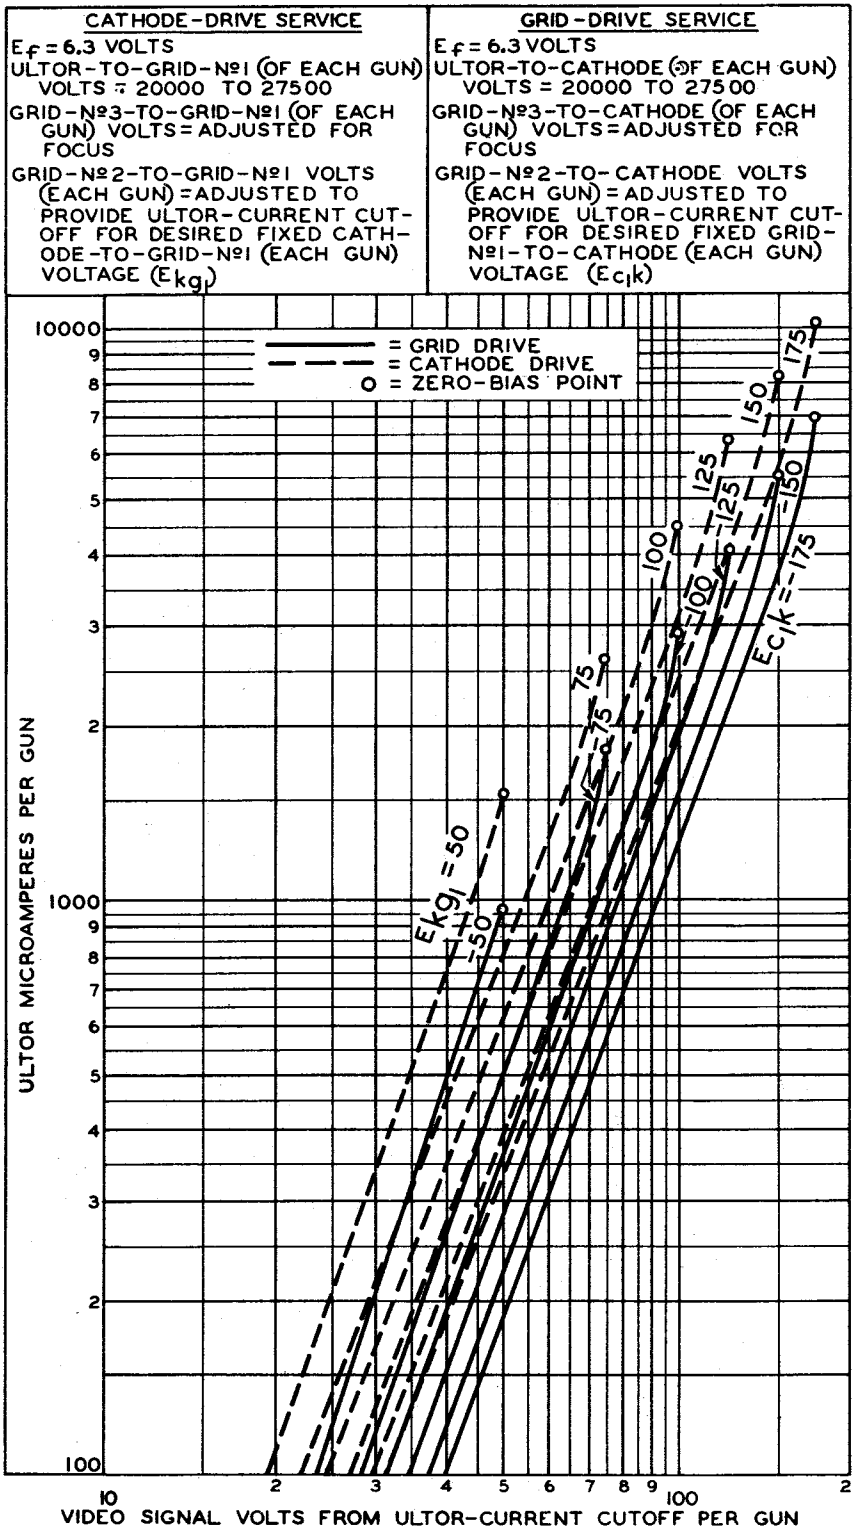

92CL-10845



TYPICAL LIGHT-OUTPUT CHARACTERISTICS

$E_f = 6.3$ VOLTS

GRID-NO.3-TO-CATHODE (OF EACH GUN) VOLTS=ADJUSTED FOR FOCUS

DRIVE OF EACH GUN IS ADJUSTED TO GIVE COMPOSITE ULTOR CURRENT TO PRODUCE 9300° K+27 M.P.C.D. WHITE LIGHT OUTPUT. PERCENTAGE OF TOTAL ULTOR CURRENT SUPPLIED BY EACH GUN TO PRODUCE 9300° K+27 M.P.C.D. WHITE:


RED GUN: 42%

BLUE GUN: 28%

GREEN GUN: 30%

RASTER SIZE: 19 1/4" X 14 1/2" CENTERED ON TUBE FACE.

*MEASURED WITHIN 5"-DIAMETER AREA CENTERED ON TUBE FACE.

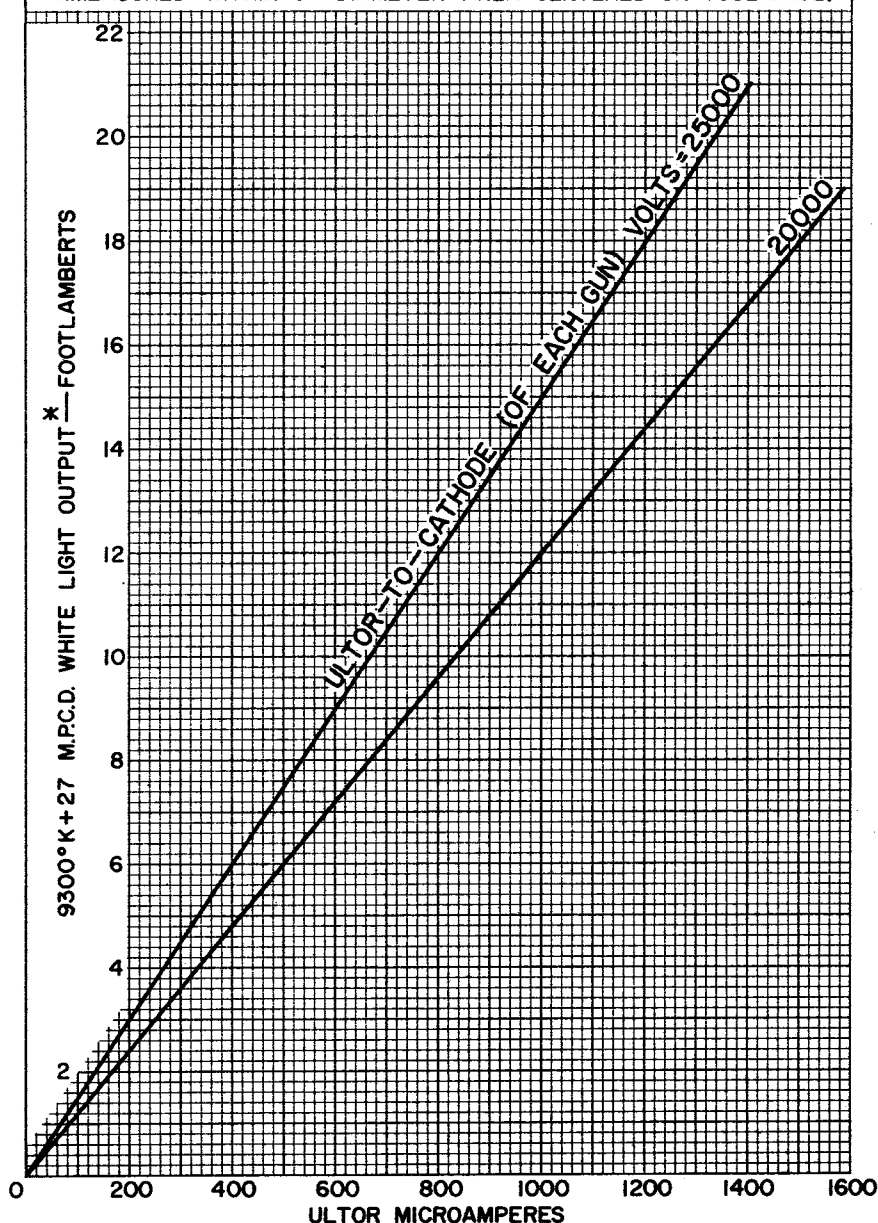

92CM-11150