

Multiplier Phototube


10-STAGE, HEAD-ON, SPHERICAL-FACEPLATE TYPE HAVING
ENCLOSED, IN-LINE DYNODE STRUCTURE, 1.68"-DIAMETER,
SPHERICAL, SEMITRANSSPARENT PHOTOCATHODE, S-11
RESPONSE, AND VERY SHORT TIME-RESOLUTION CAPABILITY

DATA

General:

Spectral Response.	S-11
Wavelength of Maximum Response	4400 $\pm$ 500 angstroms
Cathode, Semitransparent:	
Shape.	Spherical
Window:	
Area (Projected)	2.2 sq.in.
Minimum diameter	1.68 in.
Index of refraction.	1.51
Direct Interelectrode Capacitances (Approx.):	
Anode to dynode No.10.	3.8 μ f
Anode to all other electrodes.	5 μ f
Dynode No.10 to all other electrodes.	6.5 μ f
Maximum Overall Length	6.12"
Seated Length.	5.18" $\pm$ 0.19"
Maximum Diameter	2.31"
Operating Position	Any
Weight (Approx.)	6 oz
Bulb	T16
Socket	Cinch No.3M14, or equivalent
Base	Medium-Shell Diheptal 14-Pin (JEDEC Group 5, No.B14-38)
Basing Designation for BOTTOM VIEW	14AV

- Pin 1 - Dynode No.1
Pin 2 - Dynode No.3
Pin 3 - Dynode No.5
Pin 4 - Dynode No.7
Pin 5 - Dynode No.9
Pin 6 - Anode
Pin 7 - Dynode No.10
Pin 8 - Dynode No.8
Pin 9 - Dynode No.6
Pin 10 - Dynode No.4
Pin 11 - Dynode No.2
Pin 12 - Internal Con-
 nection—
 Do Not Use
Pin 13 - Focusing Electrode
Pin 14 - Photocathode

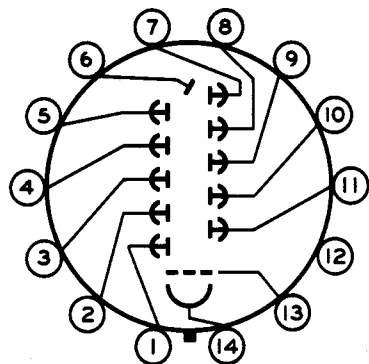

DIRECTION OF LIGHT:
INTO END OF BULB

Maximum Ratings, Absolute-Maximum Values:

SUPPLY VOLTAGE BETWEEN ANODE AND CATHODE (DC)	2500 max. volts
--	-----------------



SUPPLY VOLTAGE BETWEEN DYNODE No.10 AND ANODE (DC)	400 max.	volts
SUPPLY VOLTAGE BETWEEN CONSECUTIVE DYNODES (DC)	300 max.	volts
SUPPLY VOLTAGE BETWEEN DYNODE No.1 AND CATHODE (DC)	600 max.	volts
SUPPLY VOLTAGE BETWEEN FOCUSING ELECTRODE AND CATHODE (DC)	600 max.	volts
AVERAGE ANODE CURRENT▲	2 max.	ma
AMBIENT TEMPERATURE	75 max.	°C

Characteristics Range Values for Equipment Design:

Under conditions with dc supply voltage (E) across a voltage divider providing electrode voltages shown in Table I

With E = 2000 volts (Except as noted) and focusing-electrode voltage adjusted to give maximum current amplification

	Min.	Median	Max.	
Sensitivity:				
Radiant, at 4400 angstroms	-	9.6×10^5	-	amp/watt
Cathode radiant, at 4400 angstroms.	-	0.056	-	amp/watt
Luminous, at 0 cps●	200	1200	6000	amp/lumen
Cathode luminous:				
With tungsten light source★	50	70	-	μa/lumen
With blue light source◆*	0.05	-	-	μa
Current Amplification	-	1.7×10^7	-	
Equivalent Anode-Dark- Current Input● at luminous sensitivity of 230 amperes/lumen.	-	9×10^{-10}	3.5×10^{-9}	lumen
Equivalent Noise Input◆	-	6×10^{-12}	-	lumen
Anode-Pulse Rise Time*	-	2×10^{-9}	-	sec
Greatest Delay Between Anode Pulses:				
Due to position from which electrons are simultaneously re- leased within a circle centered on tube face having a diameter of—				
1.4"	-	$3 \times 10^{-10\oplus}$	-	sec
1.6"	-	$5 \times 10^{-10\oplus}$	-	sec

With E = 1500 volts (Except as noted) and focusing-electrode voltage adjusted to give maximum current amplification

	Min.	Median	Max.	
Sensitivity:				
Radiant, at 4400 angstroms	-	1×10^5	-	amp/watt
Cathode radiant, at 4400 angstroms	-	0.056	-	amp/watt
Luminous, at 0 cps●	23	130	680	amp/lumen

	Min.	Median	Max.	
Cathode luminous:				
With tungsten light source*	50	70	—	$\mu\text{a/lumen}$
Current Amplification	—	1.8×10^6	—	
Equivalent Anode-Dark-Current Input [•] at luminous sensitivity of 20 amperes/lumen	—	8×10^{-10}	2.5×10^{-9}	lumen
Equivalent Noise Input [♦]	—	4×10^{-12}	1×10^{-11}	lumen
Pulse Height Resolution [#]	—	8.5	9	%

With $E = 1000$ volts (Except as noted) and focusing-electrode voltage adjusted to give maximum current amplification

	Min.	Median	Max.	
Sensitivity:				
Radiant, at 4400 angstroms	—	4.8×10^3	—	amp/watt
Cathode radiant, at 4400 angstroms .	—	0.056	—	amp/watt
Luminous, at 0 cps [•] .	1	6	30	amp/lumen
Cathode luminous:				
With tungsten light source*	50	70	—	$\mu\text{a/lumen}$
Current Amplification	—	8.6×10^4	—	
Equivalent Anode-Dark-Current Input [•] at luminous sensitivity of 6 amperes/lumen .	—	5×10^{-10}	—	lumen
Equivalent Noise Input [♦]	—	5×10^{-12}	—	lumen

▲ Averaged over any interval of 30 seconds maximum.

• Under the following conditions: The light source is a tungsten-filament lamp operated at a color temperature of 2870° K. A light input of 0.1 microlumen is used.

* Under the following conditions: The light source is a tungsten-filament lamp operated at a color temperature of 2870° K. The value of light flux is 0.01 lumen and 200 volts are applied between cathode and all other electrodes connected together as anode.

♦ Under the following conditions: Light incident on the cathode is transmitted through a blue filter (Corning No. C.S. 5-58, Glass Code No. 5113 polished to 1/2 stock thickness) from a tungsten-filament lamp operated at a color temperature of 2870° K. The value of light flux on the filter is 0.01 lumen. A voltage of 200 volts is applied between cathode and all other electrodes connected together as anode.

* For spectral characteristic of this source, see sheet SPECTRAL CHARACTERISTIC OF 2870° K LIGHT SOURCE AND SPECTRAL CHARACTERISTIC OF LIGHT FROM 2870° K SOURCE AFTER PASSING THROUGH INDICATED BLUE FILTER at front of this section.

• Measured at a tube temperature of 25° C. Dark current may be reduced by the use of a refrigerant.

♦ Under the following conditions: Supply voltage (E) is as shown, 25° —C tube temperature, external shield is connected to cathode, bandwidth 1 cycle per second, tungsten light source of 2870° K interrupted at a low audio frequency to produce incident radiation pulses alternating between zero and the value stated. The "on" period of the pulse is equal to the "off" period. The output current is measured through a filter which passes only the fundamental frequency of the pulses.

* Measured between 10 per cent and 90 per cent of maximum anode-pulse height. This anode-pulse rise time is primarily a function of transit-time variations in the multiplier stages and is measured under conditions with an incident-light spot approximately 1 millimeter in diameter centered on the photocathode.



⊕ These values represent the difference in time of transit between the photocathode and dynode No.1 for electrons simultaneously released from the center and from the periphery of the specified areas.

Measured with supply voltage (E) = 1200 to 1300 volts; radiation source, an isotope of cesium having an atomic mass of 137 (Cs^{137}); scintillation counter crystal, acylindrical 2" x 2" thallium-activated sodium-iodide type [NaI(Tl) — type 8D8S50, Serial No. AL281, manufactured by Harshaw Chemical Co., 1945 E. 97 Street, Cleveland 6, Ohio].

TABLE I

VOLTAGE TO BE PROVIDED BY DIVIDER	
Between	8.06% of Supply Voltage (E) multiplied by
Cathode and Dynode No.1	2
Dynode No.1 and Dynode No.2	1.4
Dynode No.2 and Dynode No.3	1
Dynode No.3 and Dynode No.4	1
Dynode No.4 and Dynode No.5	1
Dynode No.5 and Dynode No.6	1
Dynode No.6 and Dynode No.7	1
Dynode No.7 and Dynode No.8	1
Dynode No.8 and Dynode No.9	1
Dynode No.9 and Dynode No.10	1
Dynode No.10 and Anode	1
Anode and Cathode	12.4
Focusing electrode is connected to arm of potentiometer between cathode and dynode No.1. The focusing-electrode voltage is varied to give maximum current amplification.	

OPERATING CONSIDERATIONS

The *operating stability* of the 7746 is dependent on the magnitude of the anode current and its duration. When the 7746 is operated at high average values of anode current, a drop in sensitivity (sometimes called fatigue) may be expected. The extent of the drop below the tabulated sensitivity values depends on the severity of the operating conditions. After a period of idleness, the 7746 usually recovers a substantial percentage of such loss in sensitivity.


The use of an average anode current well below the maximum-rated value of 2 milliamperes is recommended when stability of operation is important. When maximum stability is required, the average anode current should not exceed 10 microamperes.

Electrostatic and/or *magnetic shielding* of the 7746 may be necessary.

Adequate *light shielding* should be provided to prevent extraneous light from reaching any part of the 7746.

The *high voltages at which the 7746 is operated are very dangerous.* Care should be taken in the design of apparatus to prevent the operator from coming in contact with these high voltages. Precautions should include the enclosure of high-potential terminals and the use of interlock switches to break the primary circuit of the high-voltage power supply when access to the apparatus is required.

**SPECTRAL-SENSITIVITY CHARACTERISTIC
of Phototube having S-11 Response
is shown at front of this Section**

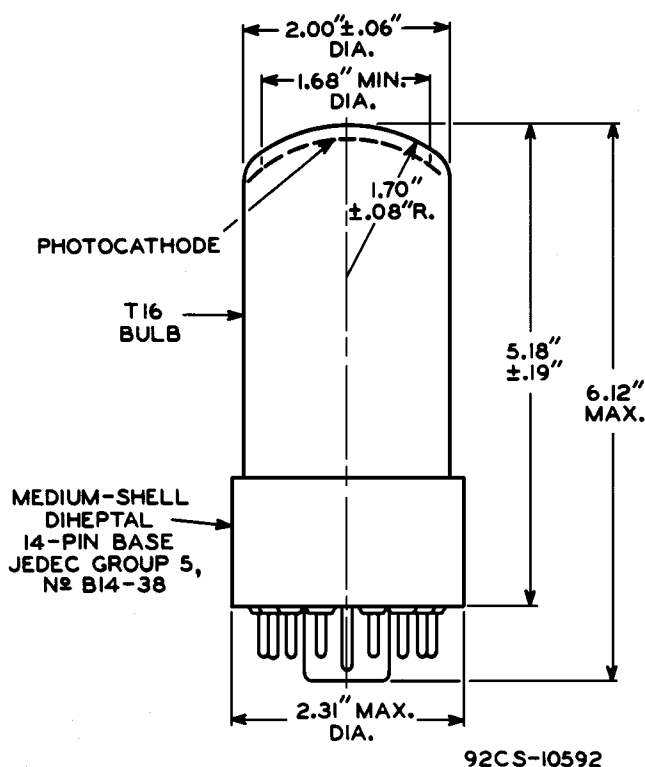


CENTER LINE OF BULB WILL NOT DEVIATE MORE THAN 2° IN ANY DIRECTION FROM THE PERPENDICULAR ERECTED AT THE CENTER OF BOTTOM OF THE BASE.



TYPICAL ANODE CHARACTERISTICS

DYNODE-NO.1-TO-CATHODE VOLTS = 160
 DYNODE-NO.1-TO-DYNODE-NO.2 VOLTS = 110
 EACH SUCCEEDING-DYNODE-STAGE VOLTS = 80
 FOCUSING-ELECTRODE VOLTAGE ADJUSTED FOR MAXIMUM
 CURRENT AMPLIFICATION.
 LIGHT SOURCE IS A TUNGSTEN-FILAMENT LAMP OPERATED AT A
 COLOR TEMPERATURE OF 2870° K.

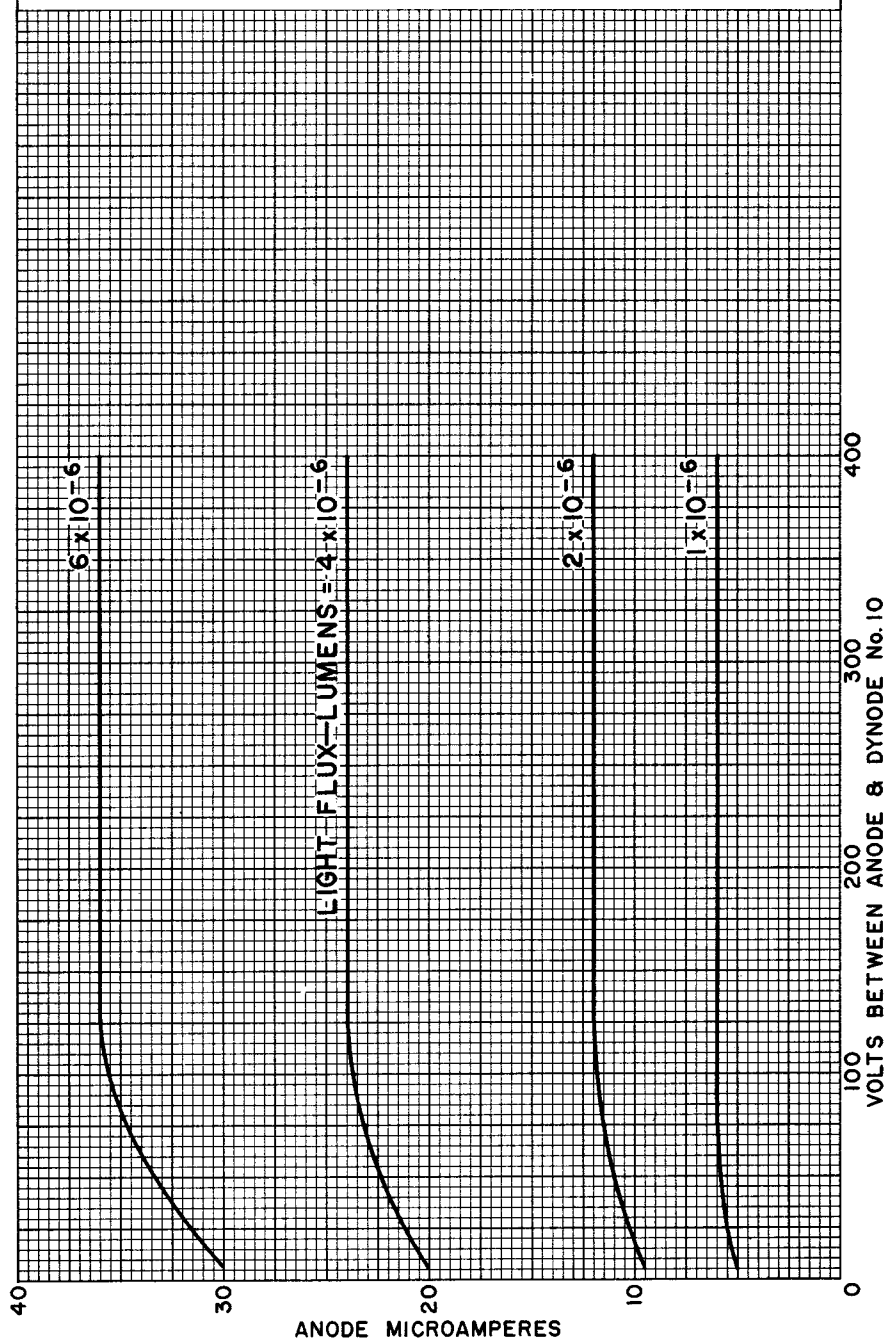

92CM-10596RI




CHARACTERISTICS

THE SUPPLY VOLTAGE (E) ACROSS VOLTAGE DIVIDER
WHICH PROVIDES VOLTAGES AS FOLLOWS:

BETWEEN	8.06% OF E MULTIPLIED BY
CATHODE & DY1	2
DY1 & DY2	1.4
DY2 & DY3	1
DY3 & DY4	1
DY4 & DY5	1
DY5 & DY6	1
DY6 & DY7	1
DY7 & DY8	1
DY8 & DY9	1
DY9 & DY10	1
DY10 & ANODE	1
ANODE & CATHODE	12.4

FOCUSING-ELECTRODE VOLTAGE IS ADJUSTED
FOR MAXIMUM CURRENT AMPLIFICATION.

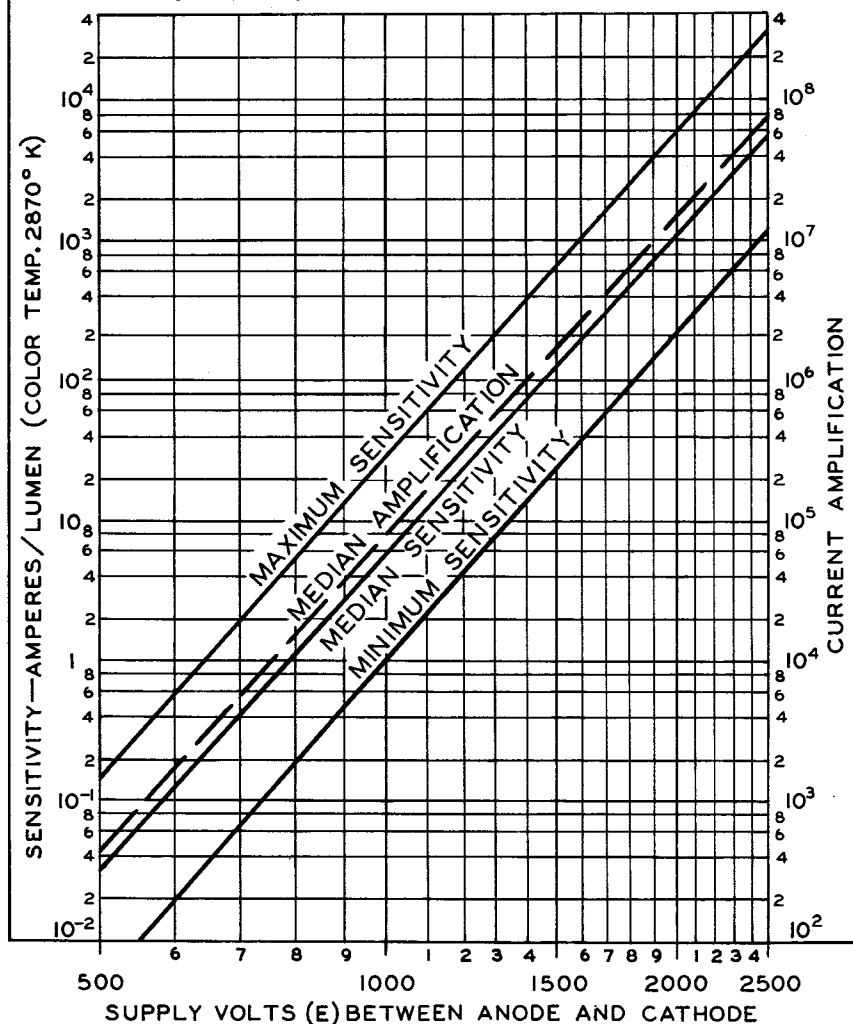

92CM-10597R1




TYPICAL ANODE-DARK-CURRENT CHARACTERISTIC

LUMINOUS SENSITIVITY IS VARIED BY ADJUSTMENT OF THE SUPPLY VOLTAGE (E) ACROSS VOLTAGE DIVIDER WHICH PROVIDES VOLTAGES AS FOLLOWS:

BETWEEN	8.06% OF E MULTIPLIED BY
CATHODE & DY1	2
DY1 & DY2	1.4
DY2 & DY3	1
DY3 & DY4	1
DY4 & DY5	1
DY5 & DY6	1
DY6 & DY7	1
DY7 & DY8	1
DY8 & DY9	1
DY9 & DY10	1
DY10 & ANODE	1
ANODE & CATHODE	12.4

FOCUSING-ELECTRODE VOLTAGE IS ADJUSTED FOR MAXIMUM CURRENT AMPLIFICATION.
LIGHT SOURCE IS A TUNGSTEN-FILAMENT LAMP OPERATED AT A COLOR TEMPERATURE OF 2870° K.
TUBE TEMPERATURE=25° C

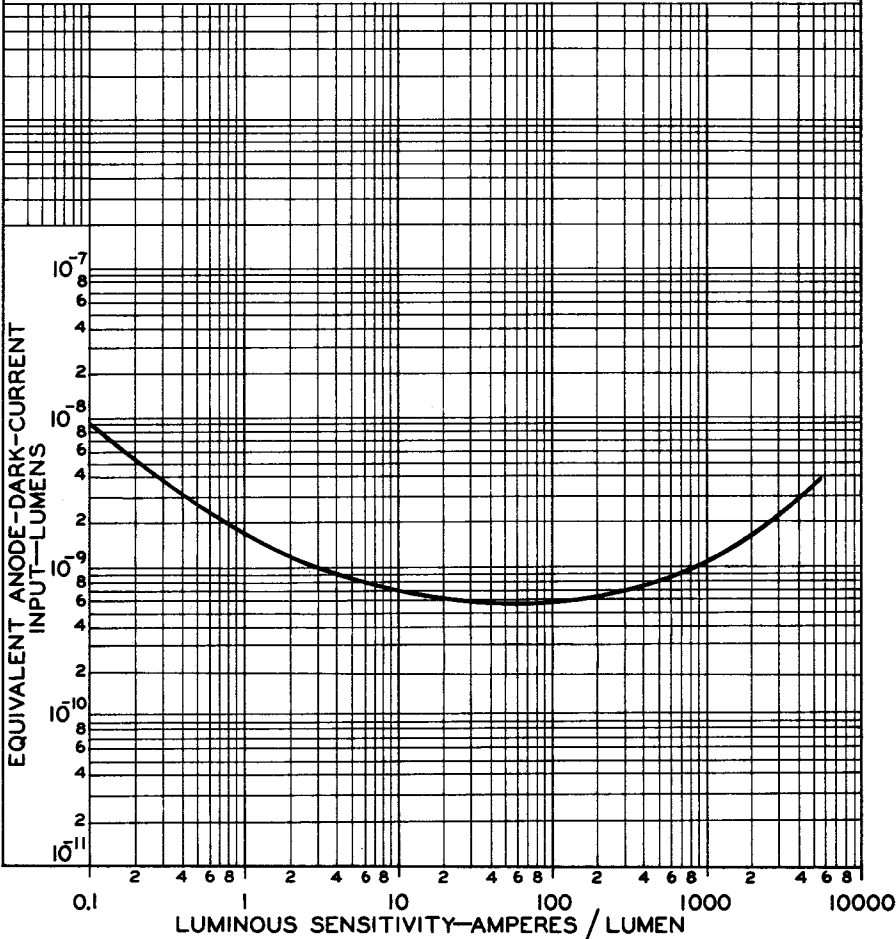


92CM-10593RI



AVERAGE FOCUSING-ELECTRODE-VOLTAGE CHARACTERISTIC


FOCUSING-ELECTRODE VOLTAGE IS
VARIED BY ADJUSTMENT OF POTENTIOM-
ETER CONNECTED BETWEEN DYNODE N₂I
AND CATHODE.

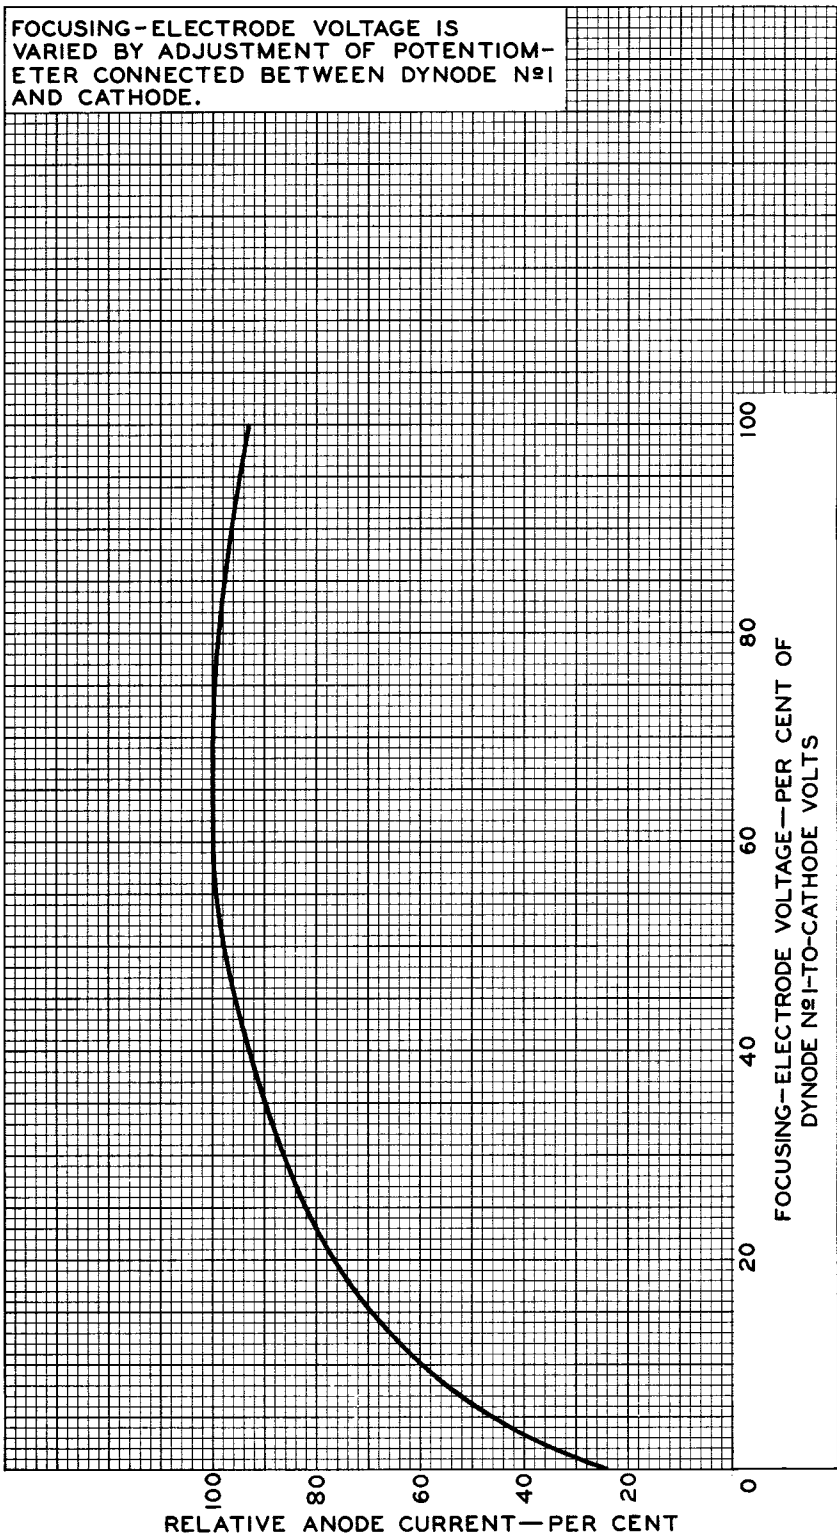

92CM-10590



TYPICAL ANODE-CURRENT CHARACTERISTIC

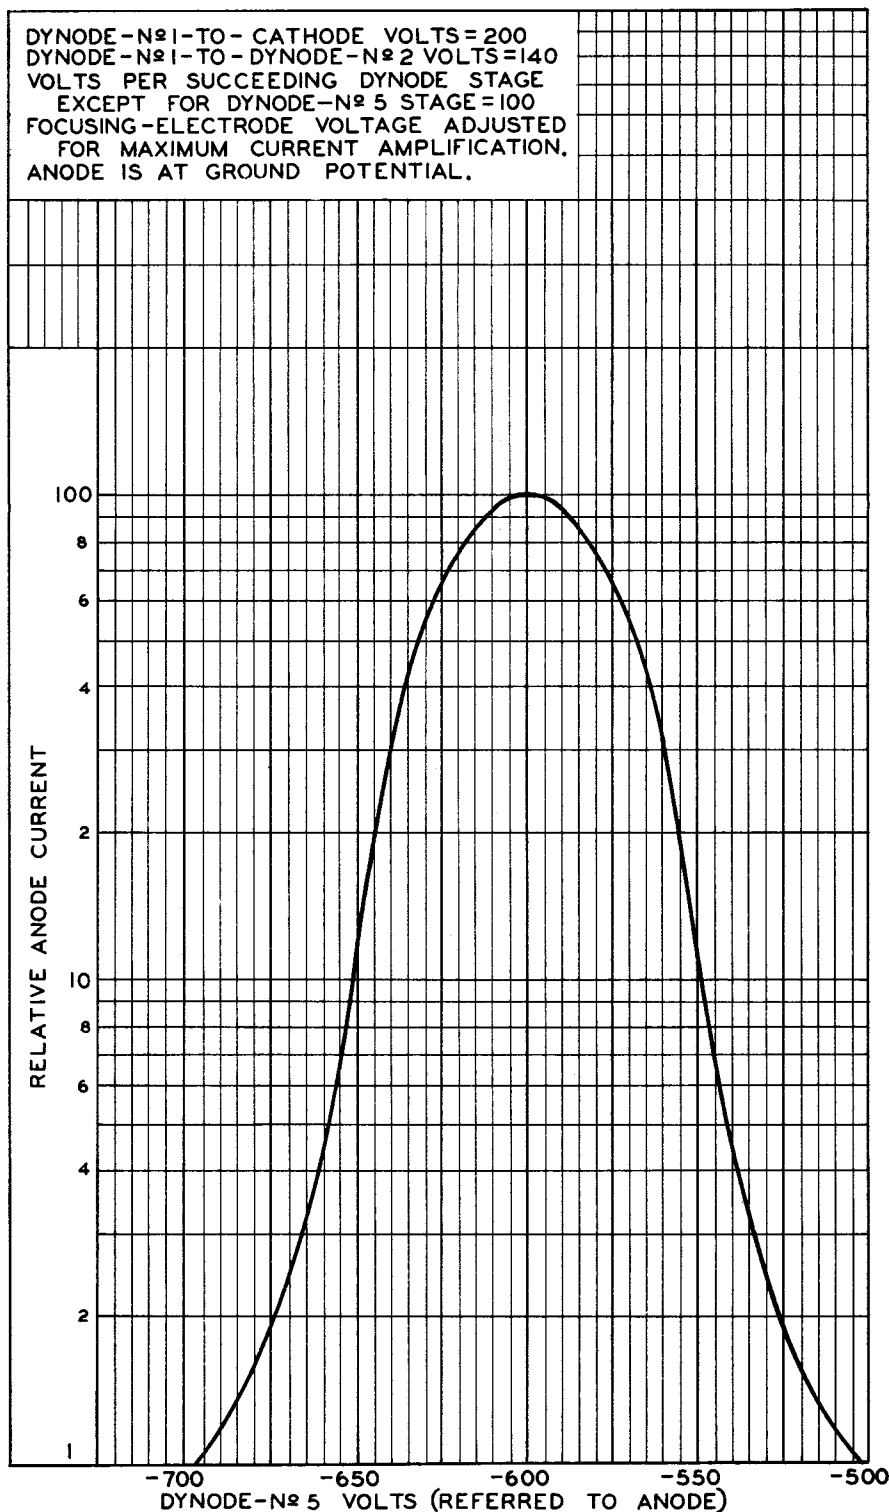

92CM-10598

