



6861

6861

TRAVELING-WAVE TUBE

LOW-NOISE AMPLIFIER TYPE

*Useful over frequency range of 2700 to 3500 Mc***GENERAL DATA****Electrical:**

Heater, for Unipotential Cathode:

Voltage 5 ac or dc volts

Current at 5 volts. 0.65 amp

Starting current: The maximum instantaneous starting current must never exceed 4 amperes, even momentarily.

Minimum Cathode Heating Time. 1 minute

Frequency Range 2700 to 3500 Mc

Cold Insertion Loss 80 db

Mechanical:

Operating Position. Any

Cooling Natural ←

Maximum Overall Length. 19-3/8"

Metal-Shell Diameter. 1.375" ± 0.005"

Weight (Approx.). 1-1/2 lbs

Collector-Terminal Connector. Birnbach No.403 Banana Jack ←

RF Connectors:


Input terminal. Type N UG-18B/U Plug ←

Output terminal Type N UG-18B/U Plug ←

Base. Octal 8-Pin

BOTTOM VIEW

Pin 1-Grid No.1
 Pin 2-No Connec-
 tion
 Pin 3-Helix
 Pin 4-Grid No.4



Pin 5-Grid No.3
 Pin 6-Grid No.2
 Pin 7-Heater
 Pin 8-Heater,
 Cathode

Maximum and Minimum Ratings, Absolute Values:

DC COLLECTOR VOLTAGE. 500 max. volts

DC HELIX VOLTAGE. 500 max. volts

DC GRID-No.4 VOLTAGE. 500 max. volts

DC GRID-No.3 VOLTAGE. 300 max. volts

DC GRID-No.2 VOLTAGE. 75 max. volts

DC GRID-No.1 VOLTAGE. 20 max. volts

DC COLLECTOR CURRENT. 500 max. μ a ←DC HELIX CURRENT. 5 max. μ a ←MAGNETIC FIELD STRENGTH 400 min. $\bullet$ gauss ←

PEAK RF POWER INPUT 100 max. watts ←

AVERAGE RF POWER INPUT. 0.4 max. watt ←

METAL-SHELL TEMPERATURE
 (At hottest point). 175 max. $^{\circ}$ C ←

$\blacktriangle$ During alignment of the tube in the magnetic-focusing field, the helix current may exceed this value for short periods, but should never exceed 25 μ a. ←

 $\bullet$: See next page.

←Indicates a change.



TRAVELING-WAVE TUBE

Typical Operation at 3100 Mc:

DC Collector Voltage	400	volts
DC Helix Voltage	375	volts
DC Grid-No.4 Voltage	200	volts
DC Grid-No.3 Voltage	40	volts
DC Grid-No.2 Voltage (Approx.) . . .	20	volts
DC Grid-No.1 Voltage	0	volts
DC Collector Current	150	μ a
DC Helix Current	0.5	μ a
DC Grid-No.4 Current	each less than 1 μ a	
DC Grid-No.3 Current		
DC Grid-No.2 Current		
DC Grid-No.1 Current		
Magnetic-Field Strength†	525 $\pm$ 5%	gausses
Gain (Low level)	25	db
Power Output (Saturated)	1	mw
Noise Figure	6.5	db

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Heater Current	1	0.45	0.85	amp
Input VSWR (Non-operating) . . .	2	—	1.7	
Output VSWR (Non-operating) . . .	2	—	2	
DC Helix Voltage	3	350	390	volts
→ DC Grid-No.4 Voltage	3	160	275	volts
→ DC Grid-No.3 Voltage	3	20	50	volts
Saturated Power Output	3	0.25	—	mw
Gain	3	20	—	db
Noise Figure	3	—	7	db

Note 1: With heater voltage of 5 volts.

Note 2: Measured at specified connector over the frequency range of 2700 to 3500 Mc.

Note 3: Adjusted for optimum noise figure with a magnetic field of 525 gaussess, signal frequency of 3100 Mc, and heater voltage of 5 volts.

OPERATING CONSIDERATIONS

The *magnetic field* required for focusing the electron beam of the 6861 may be obtained from a solenoid or permanent magnet capable of providing a uniform field of 525 gaussess over the length of the tube axis starting 2 inches from the groove near the base end of the metal shell and continuing for at least 9 inches along the tube axis.

• This value of field strength will focus the electron beam, but noise figure will not be optimum.

† For RCA Solenoid Type MW-4900.


→ Indicates a change.



6861

6861

TRAVELING-WAVE TUBE

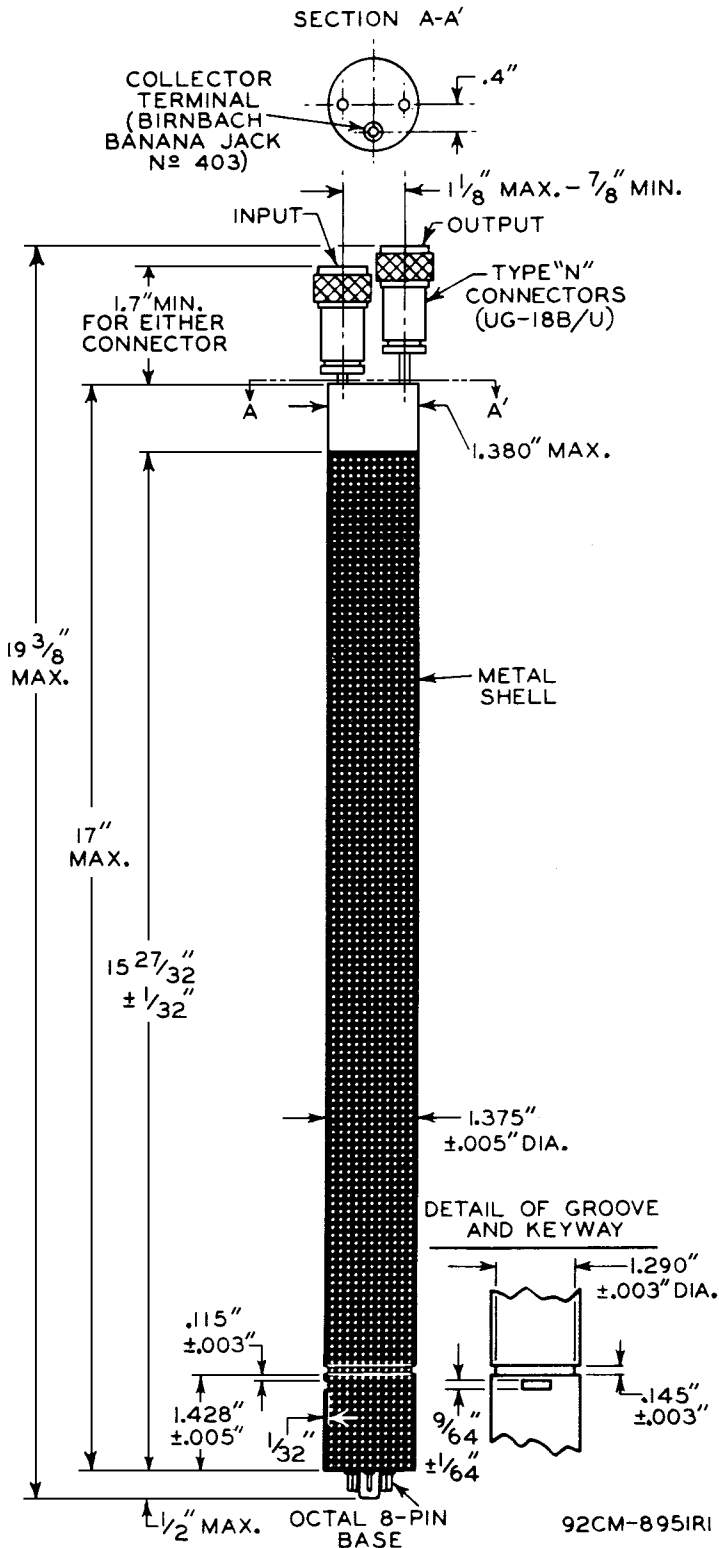


6861




6861

NOISE-FIGURE CHARACTERISTICS

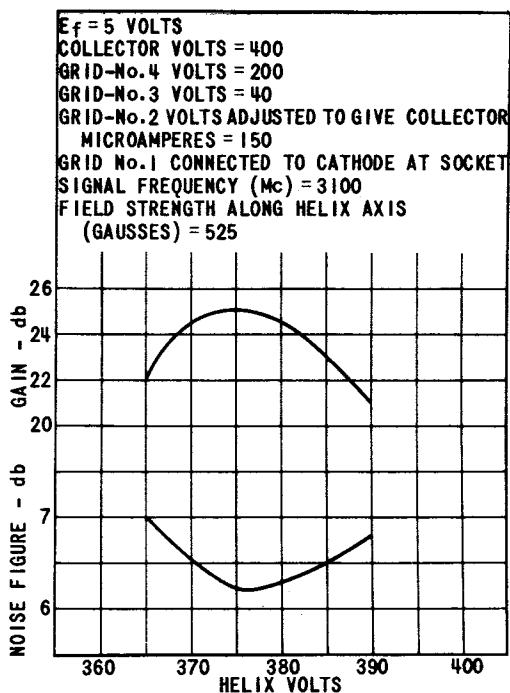

92CS-8965T

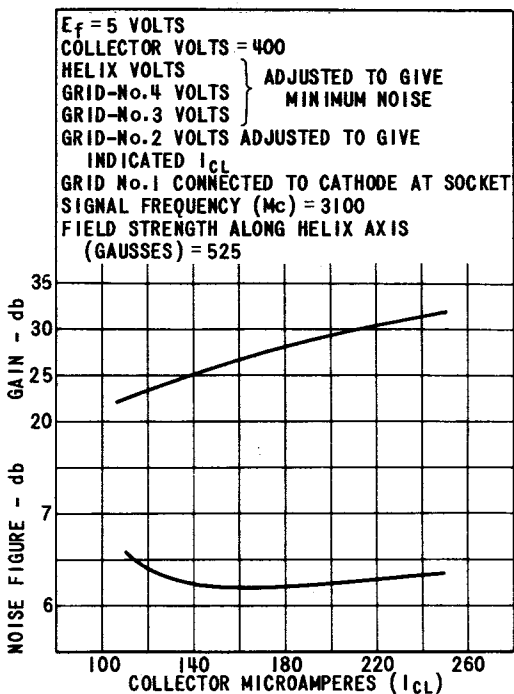


92CS-8968T




6861

6861

TRAVELING-WAVE TUBE

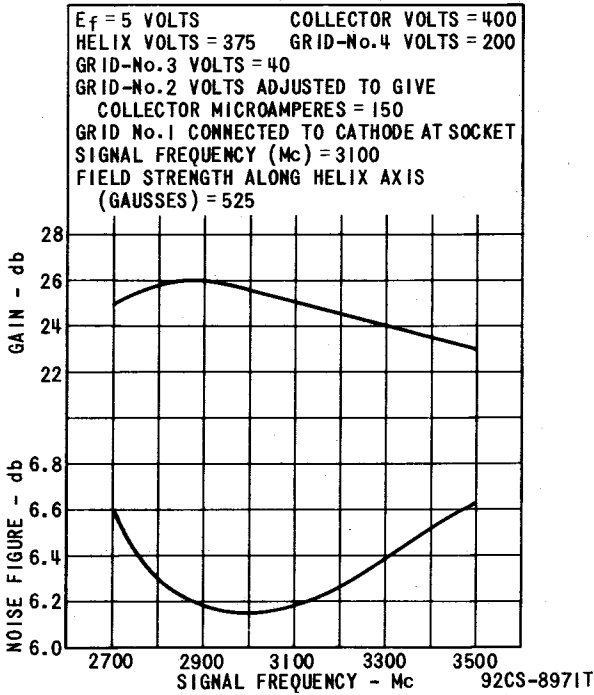NOISE - FIGURE
CHARACTERISTICS

SATURATION CHARACTERISTICS

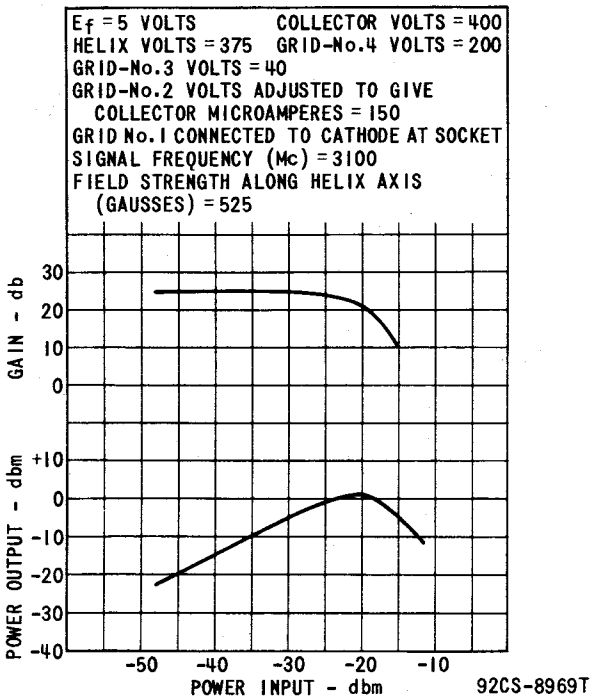

6861



6861

INPUT-MATCHING CHARACTERISTIC

