



17TP4

KINESCOPE

RECTANGULAR METAL-SHELL TYPE

LOW-VOLTAGE FOCUS

MAGNETIC DEFLECTION

DATA

General:

Heater, for Unipotential Cathode:

Voltage. 6.3 ac or dc volts

Current. 0.6 amp

Direct Interelectrode Capacitances:

Grid No.1 to All Other Electrodes. 6 μf Cathode to All Other Electrodes. 5 μf

Face Plate (With about 66% light transmission) Frosted Ulterglass

Phosphor (For Curves, see front of this Section) No.4- Sulfide Type

Fluorescence and Phosphorescence White

Persistence of Phosphorescence Short

Focusing Method. Electrostatic

Deflection Method. Magnetic

Deflection Angles (Approx.):

Diagonal 70°

Horizontal 66°

Vertical 50°

Ion-Trap Gun Requires External, Single-Field Magnet

Maximum Overall Length 19-5/16"

Greatest Diagonal of Tube at Lip 16-13/16" $\pm$ 3/16"Greatest Width of Tube at Lip. 15-15/16" $\pm$ 1/8"Greatest Height of Tube at Lip 12-1/4" $\pm$ 1/8"

Screen Size. 14-5/8" x 11"


Mounting Position. Any

Ultor® Terminal. Metal-Shell Lip

Base Small-Shell Duodecal 6-Pin (JETEC No.B6-63)

BOTTOM VIEW

Pin 1-Heater
 Pin 2-Grid No.1
 Pin 6-Grid No.4
 Pin 10-Grid No.2
 Pin 11-Cathode



Pin 12-Heater
 Metal-Shell Lip -
 Grid No.3,
 Grid No.5,
 Collector

Maximum Ratings, Design-Center Values:

ULTOR® VOLTAGE 16000 max. volts

GRID-No.4 VOLTAGE. 500 max. volts

GRID-No.2 VOLTAGE. 500 max. volts

GRID-No.1 VOLTAGE:

Negative bias value. 125 max. volts

Positive bias value. 0 max. volts

Positive peak value. 2 max. volts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode:

During equipment warm-up period

not exceeding 15 seconds. 410 max. volts

After equipment warm-up period 180 max. volts

Heater positive with respect to cathode. 180 max. volts

• See next page

OCTOBER 1, 1951

TUBE DEPARTMENT

TENTATIVE DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

17TP4



17TP4 KINESCOPE

Equipment Design Ranges:

For any ultor voltage (E_u) between 12000* and 16000 volts
and grid-No.2 voltage (E_{c2}) between 150 and 500 volts

Grid-No.4 Voltage for Focus		
With Ultor Current of 100 μ amp	0% to 2.5% of E_u	volts
Grid-No.1 Voltage for Visual		
Extinction of Undelected		
Focused Spot	11% to 25.7% of E_{c2}	volts
Grid-No.4 Current	-25 to +25	μ amp
Grid-No.2 Current	-15 to +15	μ amp
Field Strength of Single-Field		
Ion-Trap Magnet (Approx.)**	$\sqrt{\frac{E_u}{12000}} \times 33$	gausses
Field Strength of Adjustable		
Centering Magnet	0 to 8	gausses

Examples of Use of Design Ranges:

For ultor voltage of . . .	14000	16000	volts
and grid-No.2 voltage of .	300	300	volts
Grid-No.4 Voltage for Focus			
With Ultor Current of			
100 μ amp	0 to 350	0 to 400	volts
Grid-No.1 Voltage†	-33 to -77	-33 to -77	volts
Ion-Trap Magnet			
(Rated Strength)	35	40	gausses

Maximum Circuit Values:

Grid-No.1-Circuit Resistance	1.5 max.	megohms
--	----------	---------

• In the 17TP4, grid No.5 which has the ultor function, grid No.3, and collector are connected together within the tube and are conveniently referred to collectively as "ultor". The "ultor" in a cathode-ray tube is the electrode, or the electrode in combination with one or more additional electrodes connected within the tube to it, to which is applied the highest dc voltage for accelerating the electrons in the beam prior to its deflection.

* Brilliance and definition decrease with decreasing ultor voltage. In general, the ultor voltage should not be less than 12000 volts.

** With a specimen ion-trap magnet similar to JETEC Ion-Trap Magnet No. 111 located in optimum position and rotated to give maximum brightness, the ion-trap magnet current is 65 milliamperes dc when the ultor voltage is 14000 volts.

† For visual extinction of undelected focused spot.



17TP4 KINESCOPE

17TP4

OPERATING NOTES


X-Ray Warning. When operated at ultor voltages up to 16 kilovolts, the 17TP4 does not produce any harmful x-ray radiation. However, because the rating of the tube permits operation at voltages as high as 17.6 kilovolts (absolute value), shielding of the 17TP4 for x-ray radiation may be needed to protect against possible injury from prolonged exposure at close range whenever the operating conditions involve voltages in excess of 16 kilovolts.

Direction of the field of the ion trap magnet should be such that the north pole is adjacent to vacant pin position No. 8 and the south pole to pin No. 2.

17TP4



17TP4 KINESCOPE

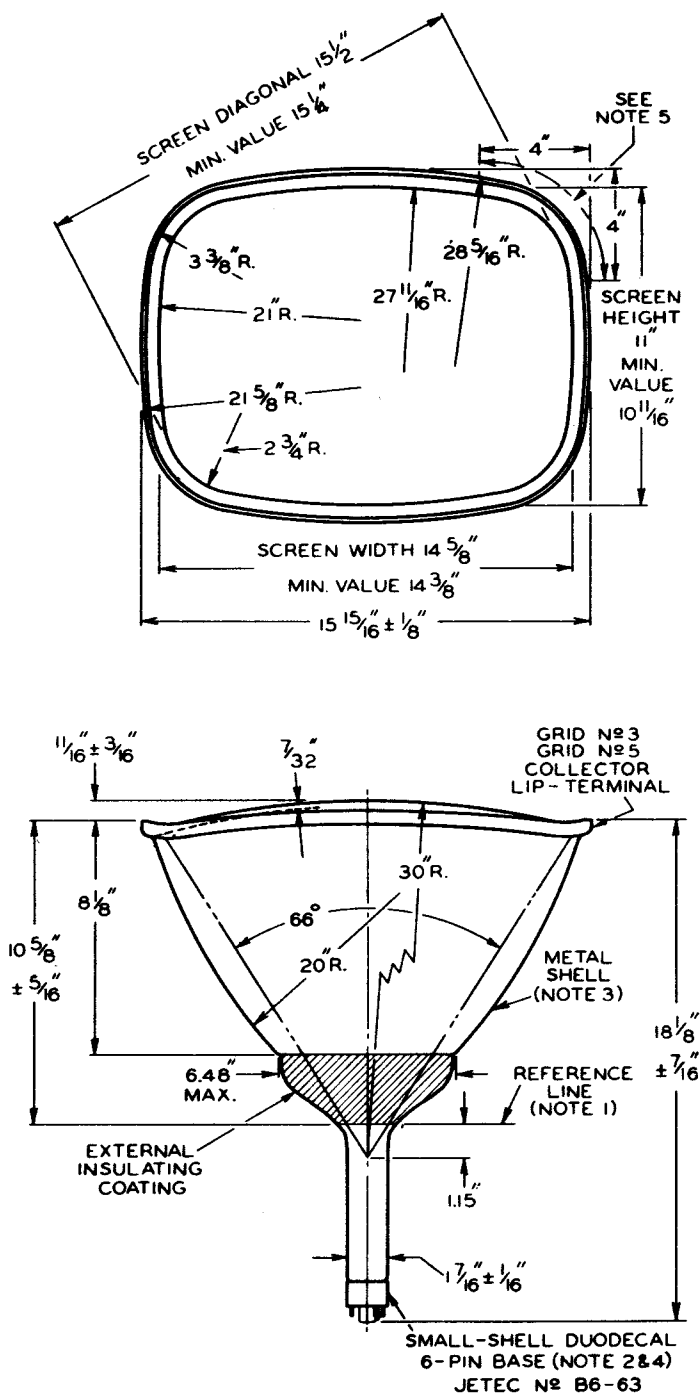

OCTOBER 1, 1951


TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-7601R1A



17TP4 KINESCOPE

17TP4

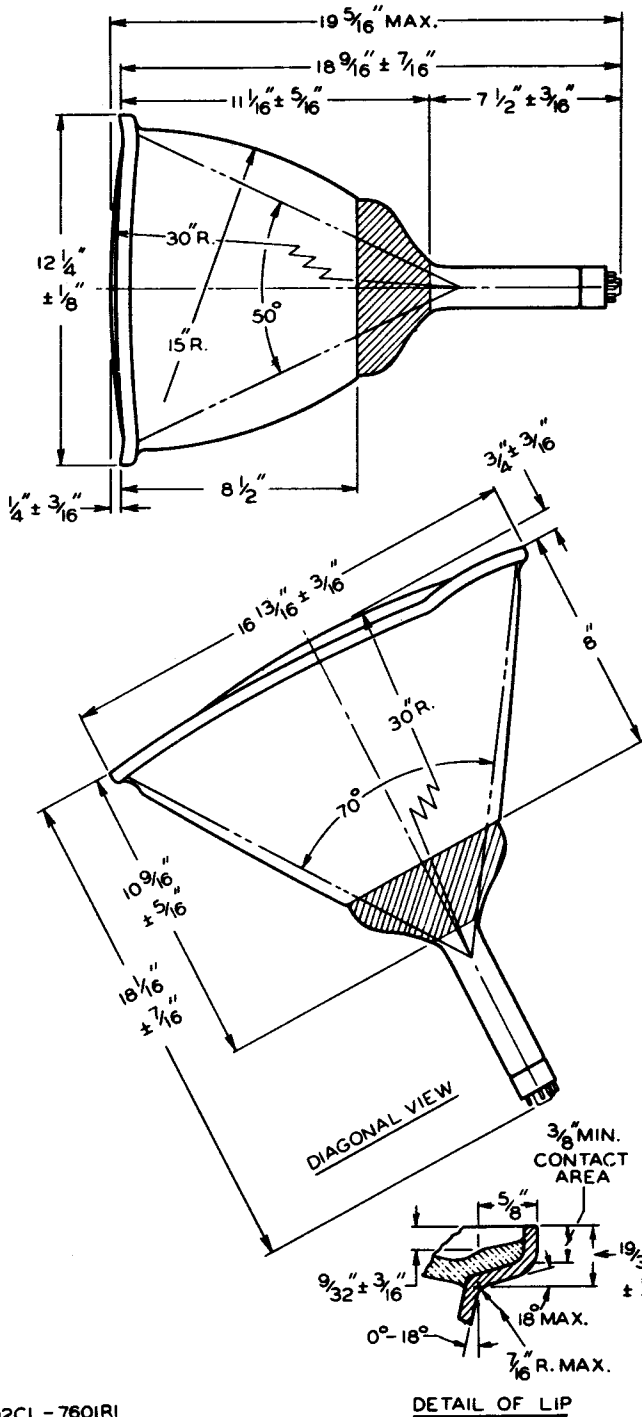

92CL-760IRI

DETAIL OF LIP

OCTOBER 1, 1951

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-7601R1B

17TP4



17TP4

KINESCOPE

NOTE 1: WITH TUBE NECK INSERTED THROUGH FLARED END OF REFERENCE-LINE GAUGE JETEC No.110 (SHOWN AT FRONT OF THIS SECTION) AND WITH TUBE SEATED IN GAUGE, THE REFERENCE LINE IS DETERMINED BY THE INTERSECTION OF THE PLANE CC' OF THE GAUGE WITH THE GLASS FUNNEL.

NOTE 2: SOCKET FOR THIS BASE SHOULD NOT BE RIGIDLY MOUNTED; IT SHOULD HAVE FLEXIBLE LEADS AND BE ALLOWED TO MOVE FREELY. BOTTOM CIRCUMFERENCE OF BASE SHELL WILL FALL WITHIN A CIRCLE CONCENTRIC WITH METAL-SHELL AXIS AND HAVING A DIAMETER OF 2-3/4".

NOTE 3: METAL SHELL AND GLASS FACE OPERATE AT HIGH VOLTAGE. ANY MATERIAL IN CONTACT WITH THE SHELL OR THE FACE MUST BE INSULATED TO WITHSTAND THE MAXIMUM APPLIED ULTOR VOLTAGE.

NOTE 4: THE PLANE THROUGH THE TUBE AXIS AND PIN No.6 MAY VARY FROM THE HORIZONTAL AXIS OF THE GLASS FACE BY AN ANGULAR TOLERANCE (MEASURED ABOUT THE TUBE AXIS) OF $\pm 10^\circ$.


NOTE 5: SUPPORT TUBE BY LIP ONLY AT CORNERS WITHIN THIS SPACE.



17TP4

17TP4

AVERAGE GRID-DRIVE CHARACTERISTICS

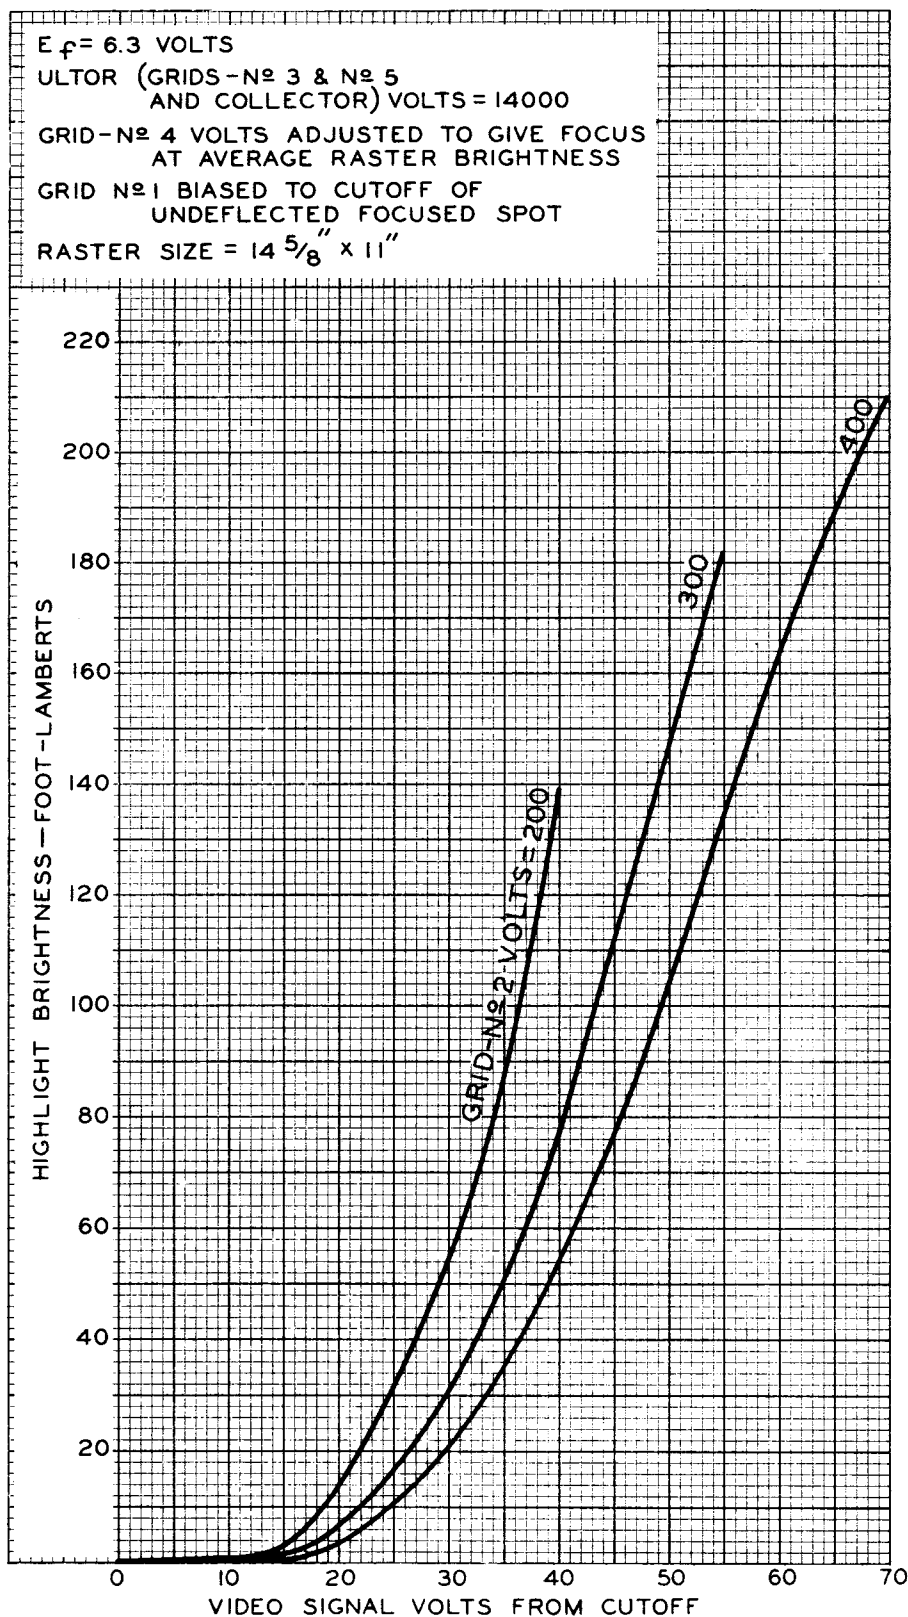


17TP4



17TP4

AVERAGE GRID-DRIVE CHARACTERISTICS

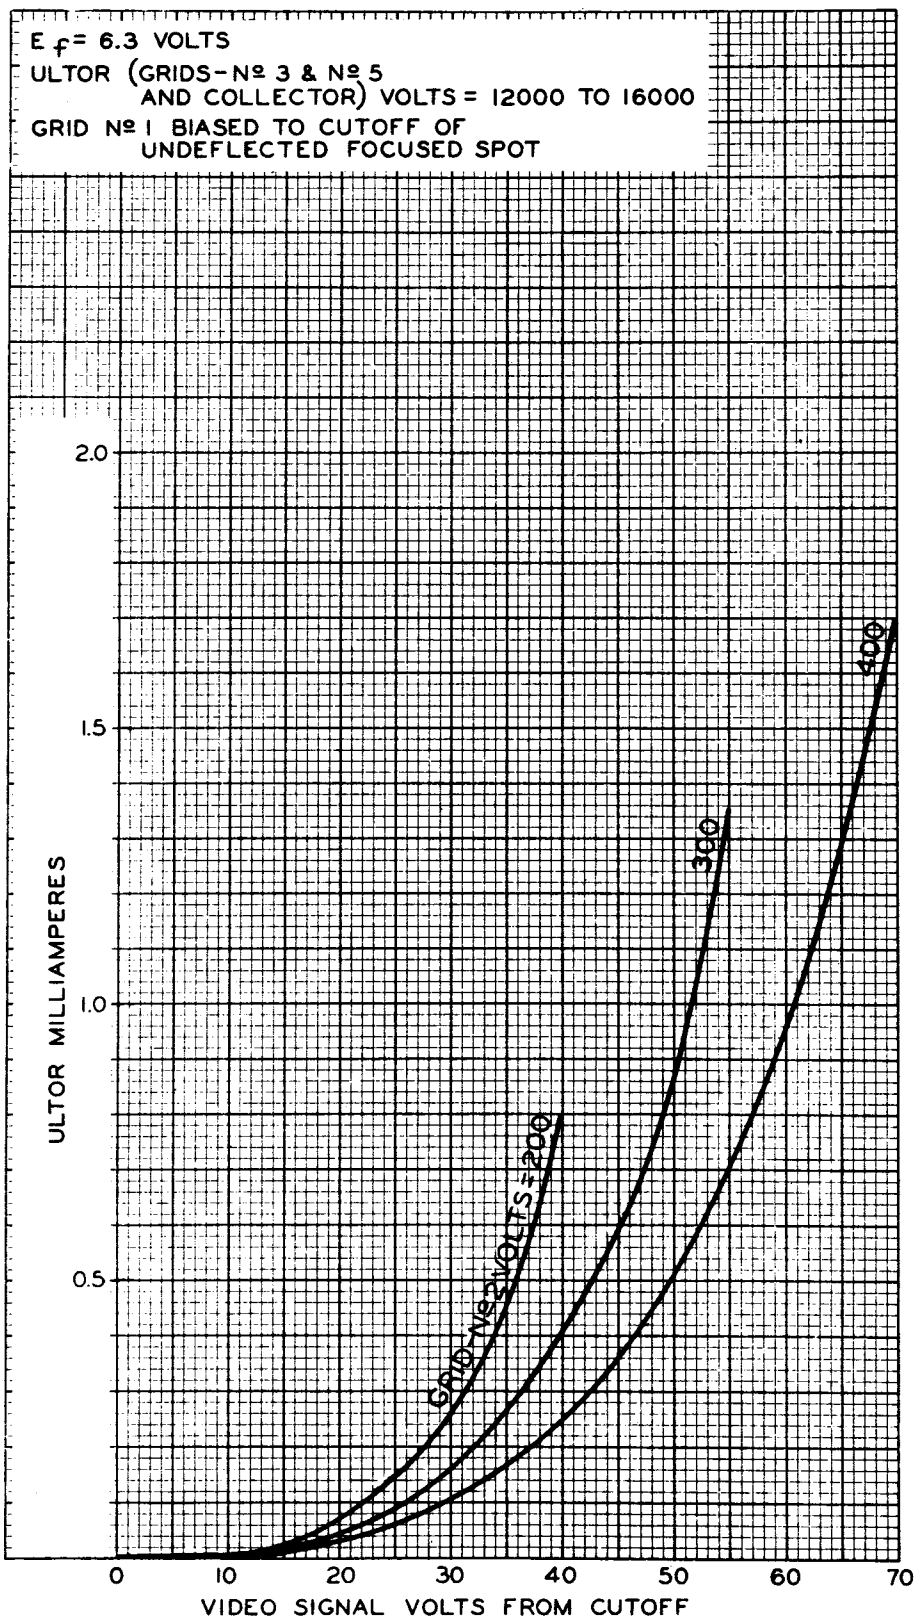

FEB. 8, 1951

TUBE DEPARTMENT

92CM-7607

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY