




117Z6-GT/G

117Z6-GT/G

HIGH-VACUUM RECTIFIER-DOUBLER

Heater	Coated Unipotential Cathodes	
Voltage	117	a-c or d-c volts
Current	0.075	amp.
Maximum Overall Length		3-5/16"
Maximum Seated Height		2-3/4"
Maximum Diameter		1-5/16"
Bulb		T-9
Base	Intermediate Shell Octal 7-Pin	
Pin 1 - No Connection		Pin 5 - Plate #1
Pin 2 - Heater		Pin 7 - Heater
Pin 3 - Plate #2		Pin 8 - Cathode #1
Pin 4 - Cathode #2		
Mounting Position		Any



BOTTOM VIEW (G-7Q)

*Maximum Ratings Are Design-Center Values*RECTIFIER OR DOUBLER

Peak Inverse Plate Voltage	700 max. volts
Peak Plate Current per Plate	360 max. ma.
D-C Output Current per Plate	60 max. ma.
D-C Heater-Cathode Potential	350 max. volts

*Typical Operation As Half-Wave Rectifier
with Condenser-Input Filter:⁰*

A-C Plate Supply Voltage				
per Plate (RMS)	117	150	235	volts
Filter Input Condenser	40	40	40	μf
Min. Total Effect. Plate-Supply Imped. per Plate	15	40	100	ohms
D-C Output Current per Plate	60	60	60	ma.

Typical Operation As Voltage Doubler:

	Half-Wave	Full-Wave	
A-C Plate Supply Voltage			
per Plate (RMS)	117	117	volts
Filter Input Condenser	40	40	μf
Min. Total Effect. Plate-Supply Imped. per Plate	30	15	ohms
D-C Output Current	60	60	ma.

⁰ In half-wave rectifier service, the two units may be used separately or in parallel.*For Typical Rectifier-Doubler Circuits, see Type 25Z5.*

← Indicates a change.

AUG. 2, 1943

RCA VICTOR DIVISION

DATA


RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

117Z6-GT/G



117Z6-GT/G

HIGH-VACUUM RECTIFIER-DOUBLER

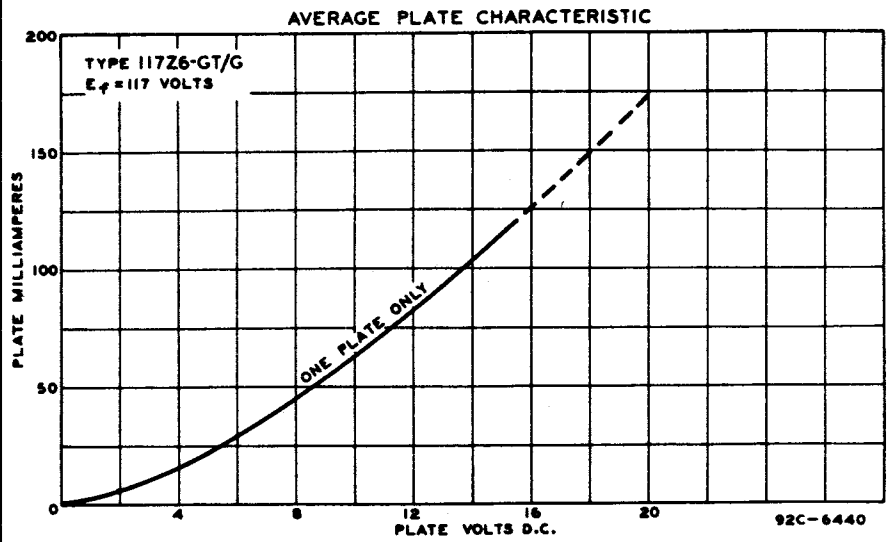

AUG. 2, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-6440