



6973

6973

BEAM POWER TUBE

9-PIN MINIATURE TYPE

*For high-fidelity audio-amplifier applications***GENERAL DATA****Electrical:**

Heater, for Unipotential Cathode:

Voltage. 6.3 ac or dc volts

Current. 0.45 amp

Direct Interelectrode Capacitances:⁰Grid No.1 to plate 0.7 max. μf Grid No.1 to cathode & grid No.3,
grid No.2, and heater. 8 μf Plate to cathode & grid No.3,
grid No.2, and heater 8.5 μf **Characteristics, Class A₁ Amplifier:**

Plate Voltage. 250 volts

Grid-No.2 (Screen-Grid) Voltage. 250 volts

Grid-No.1 (Control-Grid) Voltage -15 volts

Plate Resistance (Approx.) 73000 ohms

Transconductance 4800 μmhos

Plate Current. 46 ma

Grid-No.2 Current. 3.5 ma

Grid-No.1 Voltage (Approx.) for
plate current of 100 μa -40 volts**Mechanical:**

Operating Position Any

Maximum Overall Length 2-5/8"

Maximum Seated Length. 2-3/8"

Length, Base Seat to Bulb Top (Excluding tip). 2" $\pm$ 3/32"

Maximum Diameter 7/8"

Dimensional Outline. See General Section

Bulb T6-1/2

Base Small-Button Noval 9-Pin (JETEC No.E9-1)

Basing Designation for BOTTOM VIEW 9EU


Pin 1-Grid No.2

Pin 2-No Connection

Pin 3-Grid No.1

Pin 4-Heater

Pin 5-Heater



Pin 6-Grid No.1

Pin 7-Grid No.3,
Cathode

Pin 8-Grid No.2

Pin 9-Plate

PUSH-PULL AF POWER AMPLIFIER — Class A₁**Maximum Ratings, Design-Center Values:**

PLATE VOLTAGE. 400 max. volts

GRID-No.2 (SCREEN-GRID) VOLTAGE. 300 max. volts

GRID-No.2 INPUT. 2 max. watts

PLATE DISSIPATION. 12 max. watts

⁰: See next page.



BEAM POWER TUBE

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode	200	max.	volts
Heater positive with respect to cathode	200 [▲]	max.	volts
BULB TEMPERATURE (At hottest point on bulb surface)	250	max.	°C

Typical Operation with Fixed Bias:

Values are for 2 tubes

Plate Voltage.	250	350	400	volts
Grid-No.2 Voltage.	250	280	290	volts
Grid-No.1 (Control-Grid) Voltage [●]	-15	-22	-25	volts
Peak AF Grid-No.1-to-Grid-No.1 Voltage.	30	44	50	volts
Zero-Signal Plate Current.	92	58	50	ma
Max.-Signal Plate Current.	105	106	107	ma
Zero-Signal Grid-No.2 Current.	7	3.5	2.5	ma
Max.-Signal Grid-No.2 Current.	16	14	13.7	ma
Effective Load Resistance (Plate to plate).	8000	7500	8000	ohms
Total Harmonic Distortion.	2	1.5	2	%
Max.-Signal Power Output	12.5	20	24	watts

Typical Operation with Cathode Bias:

Values are for 2 tubes

Plate-Supply Voltage	300	310	volts
Grid-No.2 Supply Voltage	300	310	volts
Cathode Resistor	230	270	ohms
Peak AF Grid-No.1-to-Grid-No.1 Voltage	48	55	volts
Zero-Signal Plate Current.	80	77	ma
Max.-Signal Plate Current.	96	92	ma
Zero-Signal Grid-No.2 Current.	6	5	ma
Max.-Signal Grid-No.2 Current.	14	14	ma
Effective Load Resistance (Plate to plate).	5500	6000	ohms
Total Harmonic Distortion.	2	4	%
Max.-Signal Power Output	15	17	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:●

For fixed-bias operation	0.5	max.	megohm
For cathode-bias operation	1	max.	megohm

PUSH-PULL AF POWER AMPLIFIER — Class AB₁

Grid No.2 of each tube connected to tap on plate winding of output transformer

Maximum Ratings, Design-Center Values:

PLATE AND GRID-No.2 (SCREEN-GRID) SUPPLY VOLTAGE	375	max.	volts
--	-----	------	-------

○, ▲, ●: See next page.



6973

6973

BEAM POWER TUBE

GRID-No.2 INPUT.	1.75	max.	watts
PLATE DISSIPATION.	12	max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode	200	max.	volts
Heater positive with respect to cathode	200 [▲]	max.	volts
BULB TEMPERATURE (At hottest point on bulb surface)	250	max.	°C

Typical Operation:*Values are for 2 tubes*

	<i>Fixed Bias</i>	<i>Cathode Bias</i>	
Plate-Supply Voltage	375	370	volts
Grid-No.2 Supply Voltage	*	#	volts
Grid-No.1 (Control-Grid) Voltage [●]	-33.5	-	volts
Cathode Resistor	-	355	ohms
Peak AF Grid-No.1-to-Grid-No.1 Voltage.	67	62	volts
Zero-Signal Cathode Current.	62	74	ma
Max.-Signal Cathode Current.	95	84	ma
Effective Load Resistance (Plate to plate).	12500	13000	ohms
Total Harmonic Distortion.	1.5	1.2	%
Max.-Signal Power Output	18.5	15	watts

Maximum Circuit Values:Grid-No.1-Circuit Resistance:[●]

For fixed-bias operation	0.5 max.	megohm
For cathode-bias operation	1 max.	megohm

[○] Without external shield.[▲] The dc component must not exceed 100 volts.[●] The type of input coupling network used should not introduce too much resistance in the grid-No.1 circuit. Transformer- or impedance-coupling devices are recommended.^{*} Obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to apply 50 per cent of the plate signal voltage to grid No.2 of each output tube.[#] Obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to supply 43 per cent of the plate signal voltage to grid No.2 of each output tube.

6973



6973

AVERAGE PLATE CHARACTERISTICS






6973

6973

AVERAGE CHARACTERISTICS

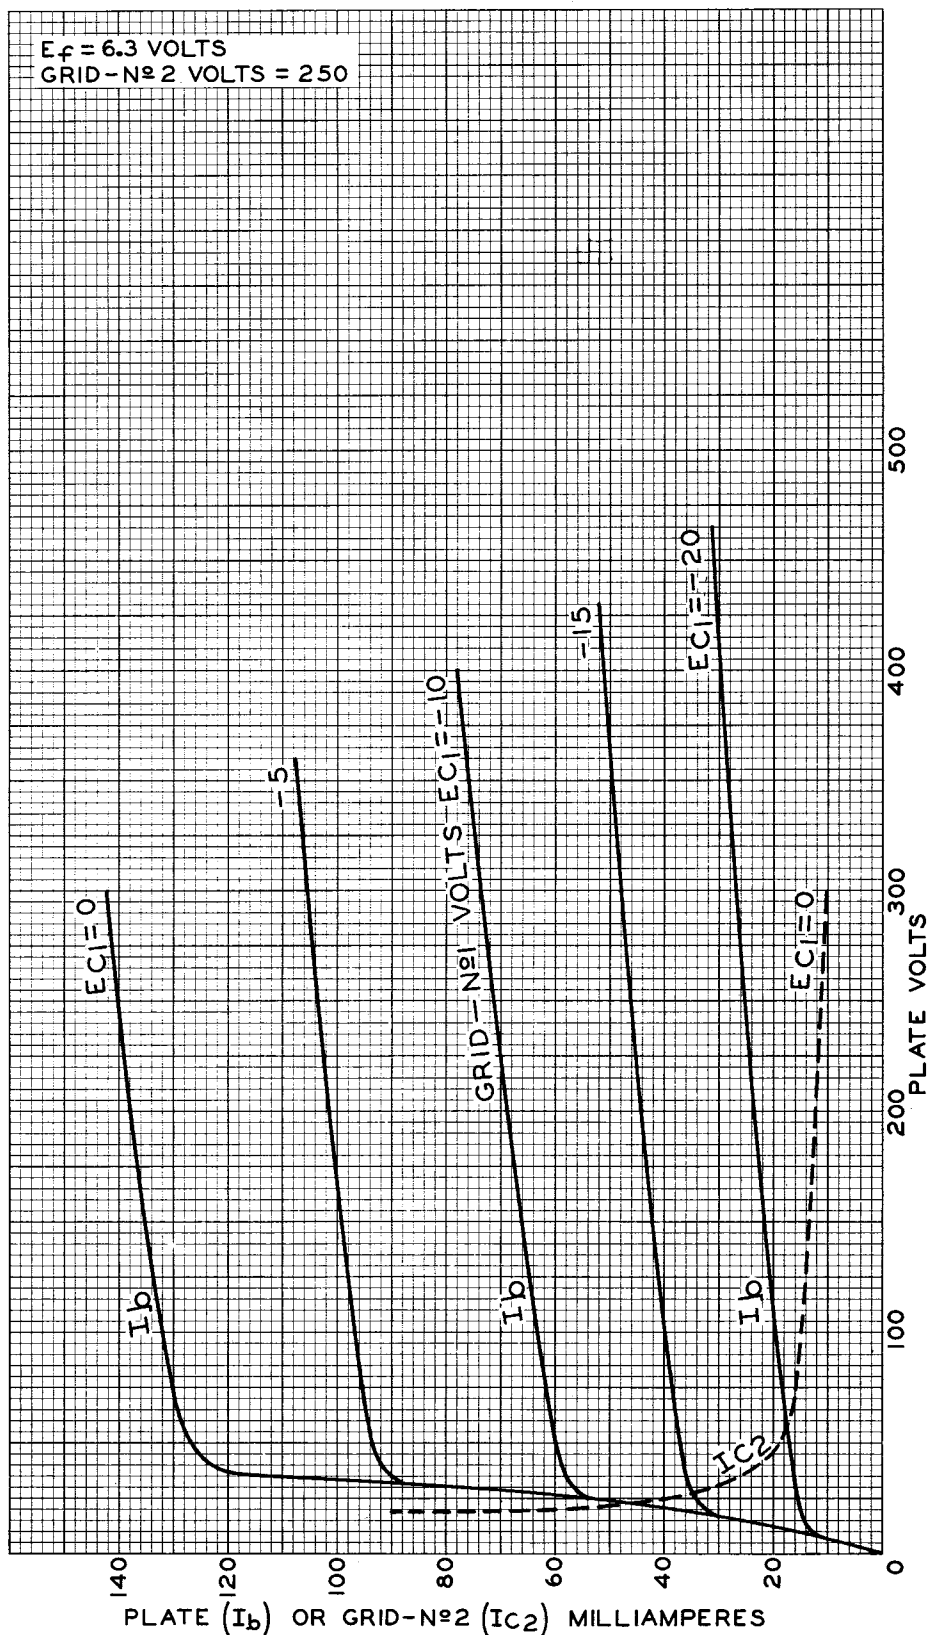

ELECTRON TUBE DIVISION

92CM-9389

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6973



6973

OPERATION CHARACTERISTICS PUSH-PULL CLASS AB₁ OPERATION

