



803

803

R-F POWER AMPLIFIER PENTODE

Filament	Thoriated Tungsten	
Voltage	10	a-c or d-c volts
Current	5	amp.
Transconductance		
for plate current of 62.5 ma.	4000	μmhos
Direct Interelectrode Capacitances:		
Grid to Plate (with external shielding)	0.15 max.	μμf
Input	17	μμf
Output	29	μμf
Overall Length		9-1/16" ± 3/16" ←
Seated Height		8-5/16" ± 3/16"
Maximum Diameter		2-9/16"
Bulb		T-20
Cap		Medium
Base	Medium Shell Giant 5-Pin Micanol, Bayonet	←
RCA Socket	Stock No.9927	

*Maximum Ratings Are Absolute Values***MAXIMUM RATINGS and TYPICAL OPERATING CONDITIONS****R-F POWER AMPLIFIER - Class B Telephony***Carrier conditions per tube for use with a max. modulation fact. of 1.0*

D-C Plate Voltage	2000 max.	volts
D-C Suppressor Voltage (Grid #3)	500 max.	volts
D-C Screen Voltage (Grid #2)	600 max.	volts
D-C Plate Current	160 max.	ma.
Plate Input	180 max.	watts
Suppressor Input	10 max.	watts
Screen Input	20 max.	watts
Plate Dissipation	125 max.	watts

Typical Operation:

D-C Plate Voltage	1250	1500	2000	volts
D-C Suppressor Voltage	40	40	40	volts
D-C Screen Voltage**	500	550	600	volts
D-C Grid Voltage (Grid #1)•	-30	-35	-40	volts ←
Peak R-F Grid Voltage	90	70	55	volts
D-C Plate Current	130	110	80	ma.
D-C Screen Current	33	30	20	ma.
D-C Grid Current	8	5	3	approx.ma.
Driving Power*	4.5	3.0	1.5	approx.watts
Power Output	52	53	53	approx.watts

* At crest of a-f cycle with modulation factor of 1.0.

O For a-c filament supply.

• obtained from a fixed supply or from suitably by-passed cathode resistor. ←

SUPPRESSOR-MODULATED R-F POWER AMPLIFIER - Class C Telephony*Carrier conditions per tube for use with a max. modulation fact. of 1.0*

D-C Plate Voltage	2000 max.	volts
D-C Screen Voltage (Grid #2)	600 max.	volts
D-C Grid Voltage (Grid #1)	-500 max.	volts
D-C Plate Current	110 max.	ma.
D-C Grid Current	50 max.	ma.
Plate Input	180 max.	watts
Screen Input	30 max.	watts

← Indicates a change. **: See end of tabulation.

AUG. 15, 1944

RCA VICTOR DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA 1



R-F POWER AMPLIFIER PENTODE

(continued from preceding page)

Plate Dissipation				125 max.	watts
Typical Operation:					
D-C Plate Voltage	1250	1500	2000		volts
D-C Suppressor Voltage	-70	-90	-110		volts
D-C Screen Voltage ^Δ	13000	17000	35000		ohms
D-C Grid Voltage [□]	{ -110 5000	-100	-100		volts
		5000	7000		ohms
Peak A-F Suppressor Volt.	110	130	150		volts
Peak R-F Grid Voltage	200	190	170		volts
D-C Plate Current	100	100	80		ma.
D-C Screen Current	70	70	48		ma.
D-C Grid Current	22	20	15	approx.	ma.
Driving Power	4	3.5	2.5	approx.	watts
Power Output	40	50	53	approx.	watts

^Δ Voltage taken from unmodulated plate-voltage supply through resistor.

[□] From fixed supply, grid resistor (5000, 5000, 7000), or cathode resistor.

GRID-MODULATED R-F POWER AMPLIFIER - Class C Telephony

Carrier conditions per tube for use with a max. modulation fact. of 1.0

D-C Plate Voltage			2000 max.	volts
D-C Suppressor Voltage (Grid #3)			500 max.	volts
D-C Screen Voltage (Grid #2)			600 max.	volts
D-C Grid Voltage (Grid #1)			-500 max.	volts
D-C Plate Current			160 max.	ma.
Plate Input			180 max.	watts
Suppressor Input			10 max.	watts
Screen Input			20 max.	watts
Plate Dissipation			125 max.	watts

Typical Operation:

D-C Plate Voltage	1250	1500	2000		volts
D-C Suppressor Voltage	40	40	40		volts
D-C Screen Voltage**	500	550	600		volts
D-C Grid Voltage	-100	-90	-80		volts
Peak R-F Grid Voltage	160	130	100		volts
Peak A-F Grid Voltage	75	65	50		volts
D-C Plate Current	130	110	80		ma.
D-C Screen Current	30	25	20		ma.
D-C Grid Current	8	6	4	approx.	ma.
Driving Power*	4	3	2	approx.	watts
Power Output	52	53	53	approx.	watts

* At crest of a-f cycle with modulation factor of 1.0.

PLATE-MODULATED R-F POWER AMPLIFIER - Class C Telephony

Pentode Connection

Carrier conditions per tube for use with a max. modulation fact. of 1.0

D-C Plate Voltage			1600 max.	volts
D-C Suppressor Voltage (Grid #3)			500 max.	volts
D-C Screen Voltage (Grid #2)			500 max.	volts
D-C Grid Voltage (Grid #1)			-500 max.	volts
D-C Plate Current			160 max.	ma.
D-C Grid Current			50 max.	ma.

** See end of tabulation. ◀ Indicates a change.



803

803

R-F POWER AMPLIFIER PENTODE

(continued from preceding page)

Plate Input	250 max.	watts
Suppressor Input	10 max.	watts
Screen Input	20 max.	watts
Plate Dissipation	85 max.	watts
Typical Operation:		
D-C Plate Voltage	1250 1600	volts
D-C Suppressor Voltage	100 100	volts
D-C Screen Voltage #	{ 18000 27000	ohms
	{ 350 400	volts
D-C Grid Voltage ▲	{ -80 -80	volts
	{ 4000 4000	ohms
Peak R-F Grid Voltage	200 190	volts
D-C Plate Current	150 150	ma.
D-C Screen Current	50 45	ma.
D-C Grid Current	30 25	approx.ma.
Driving Power	6 5	approx.watts
Power Output	120 155	approx.watts

From modulated fixed supply or modulated plate-voltage supply through resistor.

PLATE-MODULATED R-F POWER AMPLIFIER - Class C Telephony**Tetrode Connection - Grids #2 & #3 tied together**

Carrier conditions per tube for use with a max. modulation fact. of 1.0

D-C Plate Voltage	1600 max.	volts
D-C Screen Voltage (Grids #2 & #3)	500 max.	volts
D-C Grid Voltage (Grid #1)	-500 max.	volts
D-C Plate Current	160 max.	ma.
D-C Grid Current	50 max.	ma.
Plate Input	250 max.	watts
Screen Input	30 max.	watts
Plate Dissipation	85 max.	watts

Typical Operation:

D-C Plate Voltage	1250 1600	volts
D-C Screen Voltage ##	{ 15000 20000	ohms
	{ 130 130	volts
D-C Grid Voltage ▲	{ -180 -180	volts
	{ 4000 4000	ohms
Peak R-F Grid Voltage	305 320	volts
D-C Plate Current	150 150	ma.
D-C Screen Current	75 75	ma.
D-C Grid Current	45 45	approx.ma.
Driving Power	15 15	approx.watts
Power Output	125 155	approx.watts

Preferably from unmodulated plate-voltage supply through resistor.

▲ obtained from grid resistor of value shown, or by partial self-bias methods.

R-F POWER AMPLIFIER & OSCILLATOR - Class C Telegraphy**Pentode Connection**

Key-down conditions per tube without modulation§

D-C Plate Voltage	2000 max.	volts
D-C Suppressor Voltage (Grid #3)	500 max.	volts

§ see next page.

← indicates a change.

AUG. 15, 1944

RCA VICTOR DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA 2



R-F POWER AMPLIFIER PENTODE

(continued from preceding page)

D-C Screen Voltage (Grid #2)	600 max.	volts
D-C Grid Voltage (Grid #1)	-500 max.	volts
D-C Plate Current	175 max.	ma.
D-C Grid Current	50 max.	ma.
Plate Input	350 max.	watts
Suppressor Input	10 max.	watts
Screen Input	30 max.	watts
Plate Dissipation	125 max.	watts

Typical Operation:

D-C Plate Voltage	1250	1500	2000	volts
D-C Suppressor Voltage	40	40	40	volts
D-C Screen Voltage ♦	500	500	500	volts
D-C Grid Voltage ■	-90	-90	-90	volts
	415	415	415	ohms
	7500	7500	7500	ohms
Peak R-F Grid Voltage	175	175	175	volts
D-C Plate Current	160	160	160	ma.
D-C Screen Current	45	45	45	ma.
D-C Grid Current	12	12	12	approx.ma.
Driving Power	2	2	2	approx.watts
Power Output	130	160	210	approx.watts

■ obtained from fixed supply, cathode resistor (415), by grid resistor (7500), or by combination methods.

R-F POWER AMPLIFIER & OSCILLATOR - Class C Telegraphy

Tetrode Connection - Grids #2 & #3 tied together

Key-down conditions per tube without modulation §

D-C Plate Voltage	2000 max.	volts
D-C Screen Voltage (Grids #2 & #3)	600 max.	volts
D-C Grid Voltage (Grid #1)	-500 max.	volts
D-C Plate Current	175 max.	ma.
D-C Grid Current	50 max.	ma.
Plate Input	350 max.	watts
Screen Input	30 max.	watts
Plate Dissipation	125 max.	watts

Typical Operation:

D-C Plate Voltage	1250	1500	2000	volts
D-C Screen Voltage ♦	150	150	150	volts
D-C Grid Voltage ⊕	-90	-90	-90	volts
	445	445	445	ohms
	3500	3500	3500	ohms
Peak R-F Grid Voltage	190	190	190	volts
D-C Plate Current	160	160	160	ma.
D-C Screen Current	15	15	15	ma.
D-C Grid Current	28	27	26	approx.ma.
Driving Power	4.6	4.4	4.4	approx.watts
Power Output	130	160	210	approx.watts

♦ Use of series resistor is not recommended.

⊕ obtained from fixed supply, cathode resistor (445), by grid resistor (3500), or by combination methods.

← Indicates a change. §, **: See next page.

AUG. 15, 1944

RCA VICTOR DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA 2



803

803


R-F POWER AMPLIFIER PENTODE

(continued from preceding page)

§ Modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier condition.

** Preferably obtained from a separate source, or from the plate-voltage supply with a voltage divider.

Data on operating frequencies for the 803 are given on the sheet TRANS. TUBE RATINGS vs FREQUENCY.

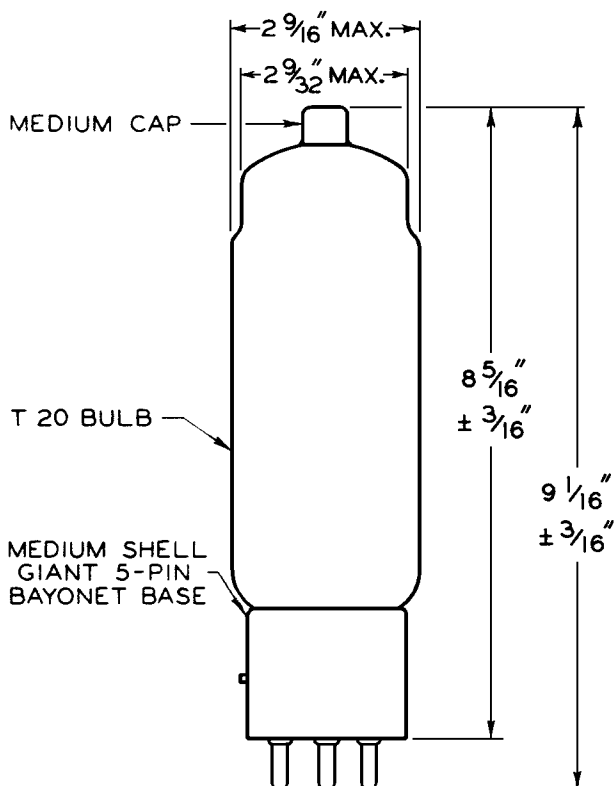


TUBE MOUNTING POSITION

VERTICAL: Base up or down.

92CM-4424R3

BOTTOM VIEW OF SOCKET CONNECTIONS



Pin 1 - Filament
Pin 2 - Grid No. 2
Pin 3 - Grid No. 1
Pin 4 - Grid No. 3
Pin 5 - Filament
Cap - Plate

5J

← Indicates a change.

AUG. 15, 1944


RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA 3




R-F POWER AMPLIFIER PENTODE


OPERATION CHARACTERISTICS
CLASS B R-F AMPLIFIER

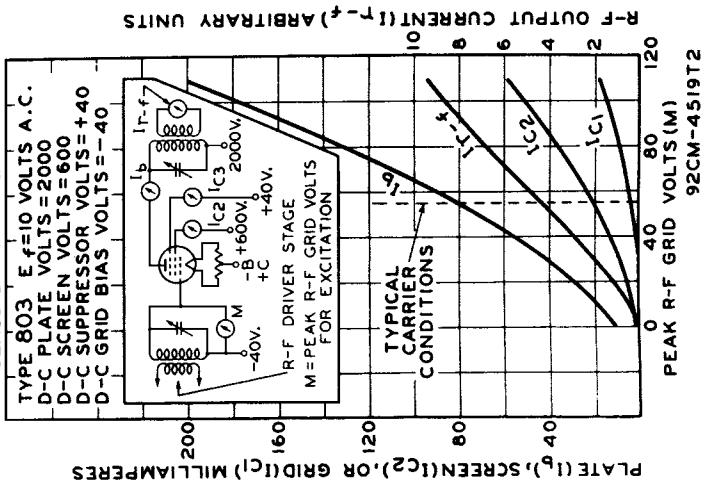

SUPPRESSOR MODULATION CHARACTERISTICS

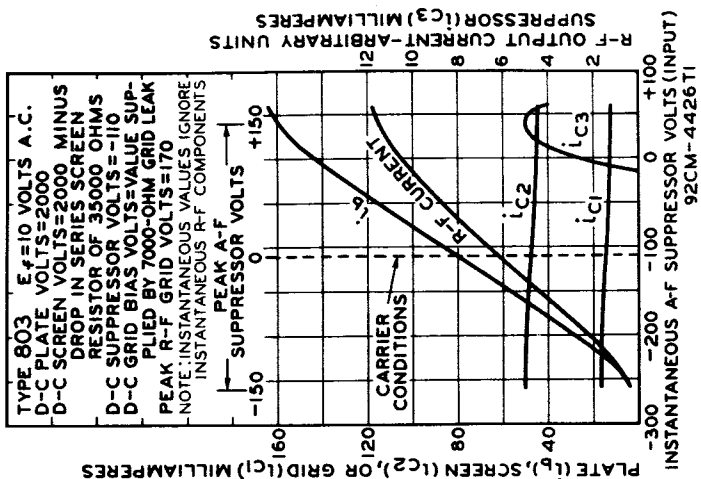

GRID MODULATION CHARACTERISTICS

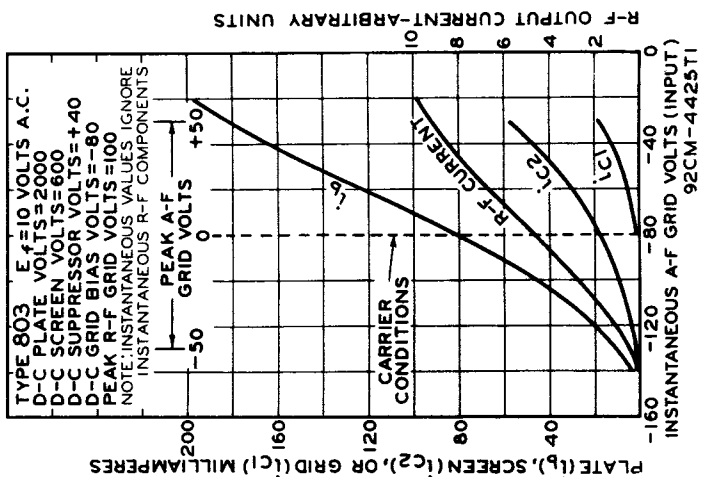




803

803

AVERAGE PLATE CHARACTERISTICS

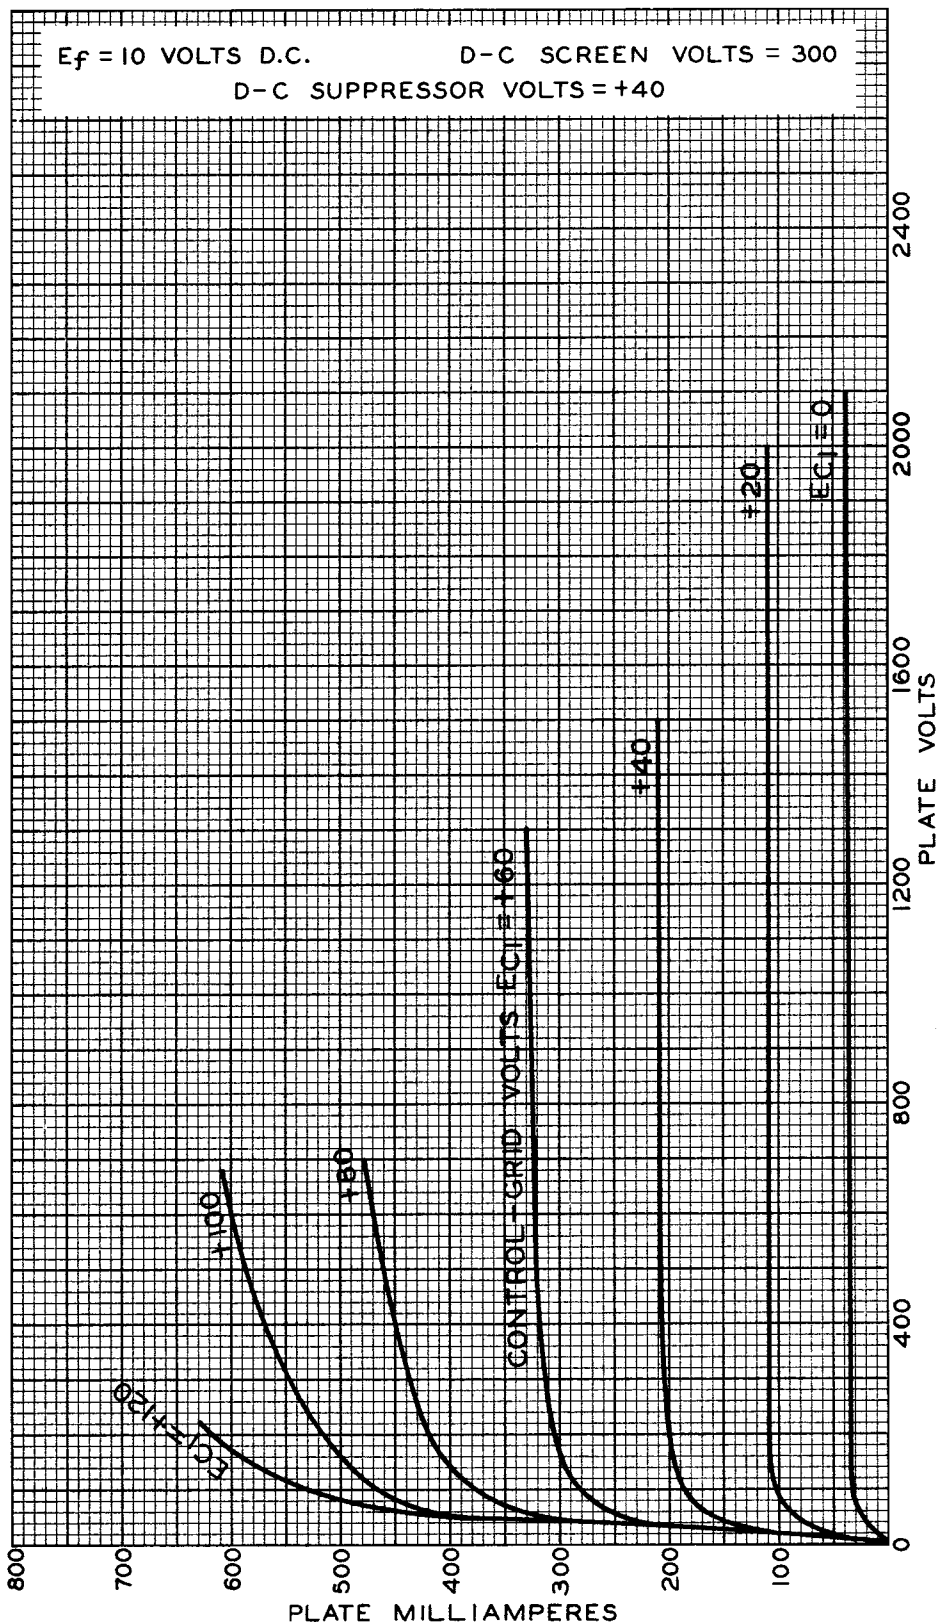

MAR. 8, 1937

RCA RADIONRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-4749



CHARACTERISTICS CURVES

