



809

809

TRANSMITTING TRIODE

GENERAL DATA

Electrical:

Filament, Thoriated Tungsten:

Voltage. 6.3 ac or dc volts

Current. 2.5 amp

Amplification Factor 50

Direct Interelectrode Capacitances:

Grid to Plate. 6.7 μf Grid to Filament 5.7 μf Plate to Filament. 0.9 μf

Mechanical:

Mounting Position. . . . Vertical, base down; or Horizontal,
pins 1 & 4 in vertical planeOverall Length 6-13/32" $\pm$ 5/32"Seated Length. 5-25/32" $\pm$ 5/32"

Maximum Diameter 2-7/16"


Bulb ST-19

Cap. Medium

Base Medium-Shell Small 4-Pin Micanol, Bayonet

Basing Designation for BOTTOM VIEW 3G

Pin 1—Filament

Pin 2—No
Connection

AA'=PLANE OF ELECTRODES

Pin 3—Grid

Pin 4—Filament

Cap—Plate

AF POWER AMPLIFIER & MODULATOR — Class B

Maximum Ratings, Absolute Values:

	CCS [•]	ICAS ^{••}	
DC PLATE VOLTAGE	750 max.	1000 max.	volts
MAX.—SIGNAL DC PLATE CUR.* .	125 max.	125 max.	ma. ←
MAX.—SIGNAL PLATE INPUT* . .	75 max.	100 max.	watts
PLATE DISSIPATION*	25 max.	30 max.	watts ←

Typical Operation:

Unless otherwise specified, values are for 2 tubes

DC Plate Voltage	750 . .	700 1000	volts
DC Grid Voltage#	-4.5 . .	0 -9	volts
Peak AF Grid-to-Grid Voltage	145 . .	160 155	volts
Zero-Signal DC Plate Current	40 . .	70 40	ma.
Max.—Signal DC Plate Current	200 . .	250 200	ma.
Effective Load Resistance (plate-to-plate) . .	8400 . .	6200 11600	ohms

*, •, ••, #: see next page.

← indicates a change.



809

TRANSMITTING TRIODE

Max.—Signal Driving Power (Approx.) . . .	2.5 . .	3.4	2.7	watts
Max.—Signal Power Output (Approx.) . . .	105 . .	120	145	watts

RF POWER AMPLIFIER — Class B Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

Maximum Ratings, Absolute Values:

	CCS [•]	ICAS ^{••}	
DC PLATE VOLTAGE	750 max.	1000 max.	volts
DC PLATE CURRENT	50 max.	60 max.	ma.
PLATE INPUT.	37.5 max.	45 max.	watts
PLATE DISSIPATION.	25 max.	30 max.	watts

Typical Operation:

DC Plate Voltage	500	750	1000	. .	volts
DC Grid Voltage [#]	-5	-10	-30	. .	volts
Peak RF Grid Voltage	35	40	60	. .	volts
DC Plate Current	50	50	45	. .	ma.
DC Grid Current (Approx.) [□]	6	5	4	. .	ma.
Driving Power (Approx.) ^{□▲}	1.4	1.4	1.5	. .	watts
Power Output (Approx.)	7.5	12.5	15	. .	watts

PLATE-MODULATED RF POWER AMPLIFIER — Class C Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

Maximum Ratings, Absolute Values:

	CCS [•]	ICAS ^{••}	
DC PLATE VOLTAGE	600 max.	750 max.	volts
DC GRID VOLTAGE.	-200 max.	-200 max.	volts
DC PLATE CURRENT	83 max.	100 max.	ma.
DC GRID CURRENT.	35 max.	35 max.	ma.
PLATE INPUT.	50 max.	75 max.	watts
PLATE DISSIPATION.	17.5 max.	25 max.	watts

Typical Operation:

DC Plate Voltage	500	600	750	. .	volts
DC Grid Voltage [⊕]	{ -60 2000	{ -60 2000	-60	. .	volts
Peak RF Grid Voltage			2000	. .	ohms
DC Plate Current	135	135	150	. .	volts
DC Grid Current (Approx.) [□]	83	83	100	. .	ma.
DC Grid Current (Approx.) [□]	32	32	32	. .	ma.
Driving Power (Approx.) [□]	3.2	3.2	4.3	. .	watts
Power Output (Approx.)	30	38	55	. .	watts

* Averaged over any audio-frequency cycle of sine-wave form.

[#] For ac filament supply.[⊕] obtained by grid resistor of value shown or by partial self-bias methods.

•, ••, □, ▲: See next page.



809

809

TRANSMITTING TRIODE

RF POWER AMPLIFIER & OSCILLATOR - Class C Telegraphy

Key-down conditions per tube without modulation^{□□}**Maximum Ratings, Absolute Values:**

	CCS [●]	ICAS ^{●●}	
DC PLATE VOLTAGE.	750 max.	1000 max.	volts
DC GRID VOLTAGE.	-200 max.	-200 max.	volts
DC PLATE CURRENT.	100 max.	100 max.	ma.
DC GRID CURRENT.	35 max.	35 max.	ma.
PLATE INPUT.	75 max.	100 max.	watts
PLATE DISSIPATION.	25 max.	30 max.	watts

Typical Operation:

DC Plate Voltage.	500	750	1000	..	volts
DC Grid Voltage ^{▲▲}	{ -50 2500 420	{ -60 3000 500	-75	..	volts
			3000	..	ohms
Peak RF Grid Voltage. . .	135	140	600	..	ohms
DC Plate Current.	100	100	160	..	volts
DC Grid Current (Approx.) [□]	20	20	100	..	ma.
Driving Power (Approx.) [□]	2.5	2.5	25	..	ma.
Power Output (Approx.) . .	35	55	3.8	..	watts
			75	..	watts

● Continuous Commercial Service.

●● Intermittent Commercial and Amateur Service.

□ Subject to wide variations as explained on sheet TUBE RATINGS in General Section.

▲ At crest of audio-frequency cycle of sine-wave form.

□□ Modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.

▲▲ Obtained from fixed supply, by grid resistor (2500, 3000, 3000) or by cathode resistor (420, 500, 600).

NOTE: When the 809 is used in the final amplifier or a preceding stage of a transmitter designed for break-in operation and oscillator keying, a small amount of fixed-bias must be used to maintain the plate current at a safe value. With a plate voltage of 1000 volts, a fixed bias of at least -10 volts should be used.


Data on operating frequencies for the 809 are given on the sheet TRANS. TUBE RATINGS vs FREQUENCY

809



809

TRANSMITTING TRIODE

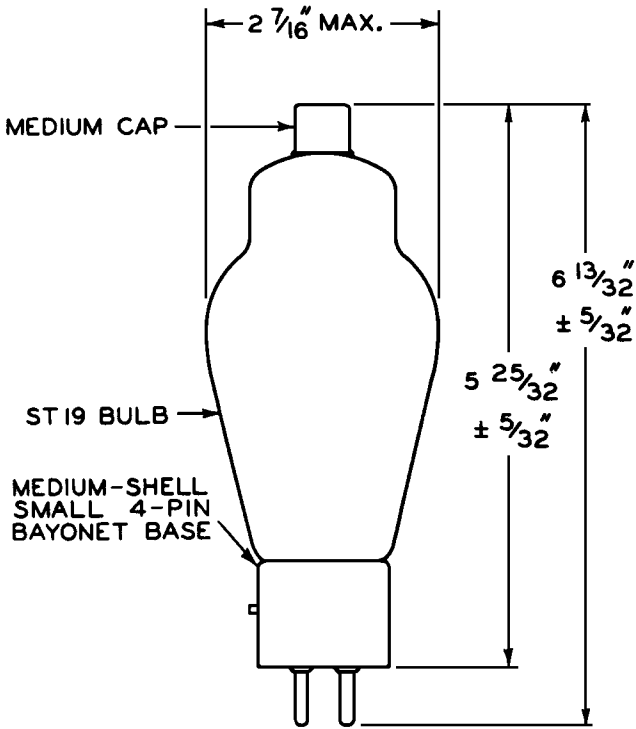

92CM-4835R1




809

809

AVERAGE PLATE CHARACTERISTICS

$E_f = 6.3$ VOLTS D.C.

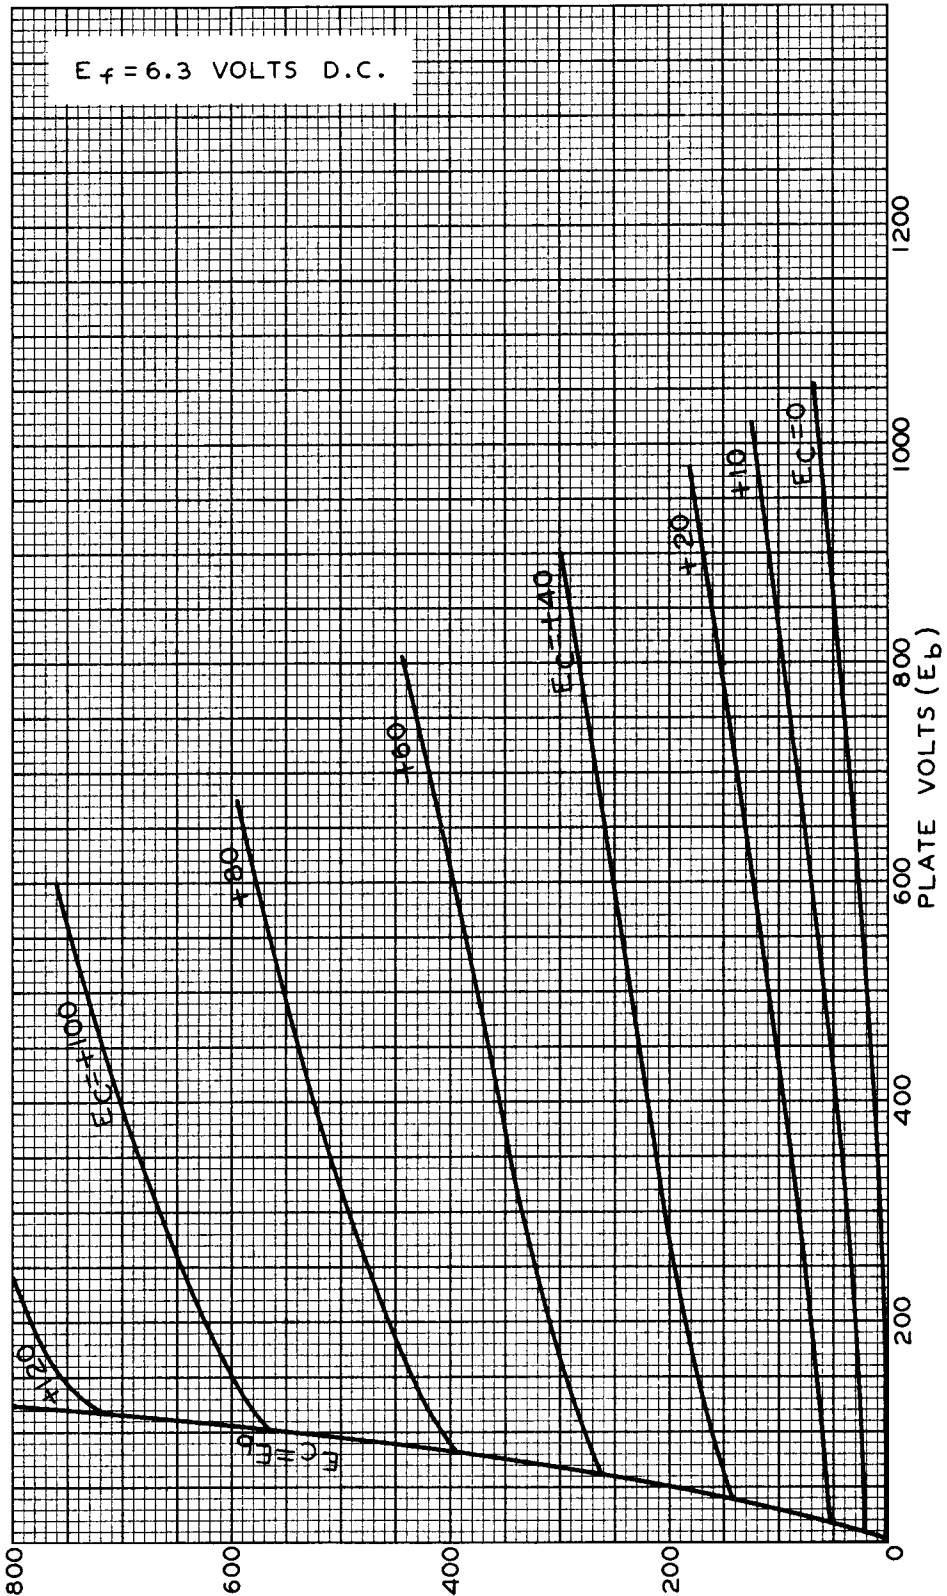

OCT. 11, 1937

PLATE MILLIAMPERES
TUBE DEPARTMENT

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-4836

809



809

TRANSMITTING TRIODE

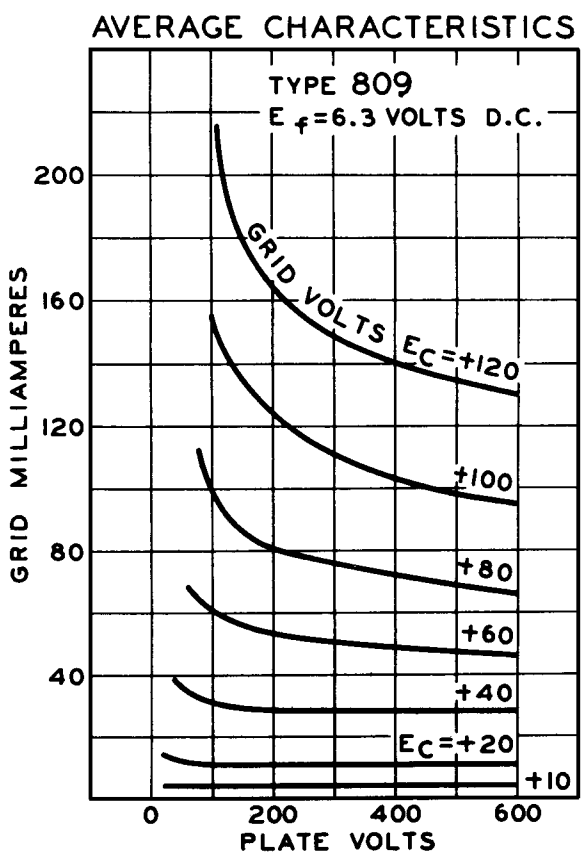

92C-4837