



5588

5588 UHF POWER TRIODE

FORCED-AIR COOLED, GROUNDING-GRID TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts

Current 2.5 amp

Minimum Heating Time[▲] 1.0 minute

Amplification Factor 16

Direct Interelectrode Capacitances:


Grid to Plate 6.0 μf Grid to Cathode 13 μf Plate to Cathode[○] 0.32 max. μf [○] With external shield connected to grid.

Mechanical:

Terminal Connections:

H-Heater Pin

Terminal

K & H-RF Cathode and
Heater Cylindrical
TerminalG-Grid RF Cylindrical Terminal
P-Plate RF Contact Surface on
Plate Ring

Mounting Position Vertical, with radiator up or down

Overall Length 3-5/16" $\pm$ 3/32"Maximum Diameter 1.750" $\pm$ 0.010"

Radiator Integral Part of Tube

Mounting Special

Air Flow:

Through Radiator (for max. rated dissipation) 10 min. cfm

The specified air flow at a pressure of 1/2 inch of water should be delivered by a blower through the radiator toward the bulb and onto the grid terminal before and during the application of any voltages. Operation of tube at less than maximum rated dissipation will require less cooling as shown by accompanying curve of cooling requirements.

Incoming-Air Temperature 45 max. $^{\circ}\text{C}$ Radiator Temperature 180 max. $^{\circ}\text{C}$ Grid-Terminal Temperature 140 max. $^{\circ}\text{C}$

PLATE-MODULATED RF POWER AMPLIFIER-Class C Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

Maximum CCS[●] Ratings, Absolute Values:

DC PLATE VOLTAGE 800 max. volts

DC GRID VOLTAGE -200 max. volts

DC PLATE CURRENT 250 max. ma.

DC GRID CURRENT 80 max. ma.

PLATE INPUT 170 max. watts

PLATE DISSIPATION 130 max. watts

[▲] Rated heater voltage must be applied for a minimum time of 1 minute before voltages are applied to the other electrodes. Heater voltage may then be reduced to the indicated typical operating value.

[●] Continuous Commercial Service.

APRIL 15, 1947

TUBE DEPARTMENT

TENTATIVE DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

5588



5588

UHF POWER TRIODE

Typical Operation in Grounded-Grid Circuit at 1000 Mc:

Heater Voltage ▲	5	volts
DC Plate Voltage	650	volts
DC Grid Voltage	-70	volts
DC Plate Current	250	ma.
DC Grid Current (Approx.)	30	ma.
Driving Power (Required by tube and input circuit)*	32	watts
Power Output (Approx.)	65	watts

* Approximate. A portion of this power appears in the load circuit. In grounded-grid plate-modulated class C rf power amplifier service, the 5588 can be modulated 100 per cent if the rf driver stage is also modulated 100 per cent simultaneously. Care should be taken to insure that the driver-modulation and the amplifier-modulation voltages are exactly in phase.

RF POWER AMPLIFIER & OSCILLATOR - Class C Telegraphy

Key-down conditions per tube without amplitude modulation □

Maximum CCS[®] Ratings, Absolute Values:

DC PLATE VOLTAGE	1000 max.	volts
DC GRID VOLTAGE	-200 max.	volts
DC PLATE CURRENT	300 max.	ma.
DC GRID CURRENT	100 max.	ma.
PLATE INPUT	250 max.	watts
PLATE DISSIPATION	200 max.	watts

Typical Operation as Grounded-Grid Amplifier at 1000 Mc:

Heater Voltage ▲	4.5	volts
DC Plate Voltage	835	volts
DC Grid Voltage	-70	volts
DC Plate Current	300	ma.
DC Grid Current (Approx.)	40	ma.
Driving Power (Required by tube and input circuit)#	32	watts
Power Output (Approx.)	100	watts

Typical Operation as Grounded-Grid Oscillator at 1000 Mc:

Heater Voltage ▲	3	volts
DC Plate Voltage	835	volts
DC Grid Voltage	-70	volts
From cathode-bias resistor of	205	ohms
DC Plate Current	300	ma.
DC Grid Current (Approx.)	40	ma.
Power Output (Approx.)	75	watts

□ Modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.

Approximate. A portion of this power appears in the load circuit.

▲, ●: See next page.



5588

5588

UHF POWER TRIODE

- ▲ Rated heater voltage must be applied for a minimum time of 1 minute before voltages are applied to the other electrodes. Heater voltage may then be reduced to the indicated typical operating value.
- CCS = Continuous Commercial Service.


Data on operating frequencies for the 5588 are given on the sheet TRANS. TUBE RATINGS vs FREQUENCY.

5588




5588

UHF POWER TRIODE

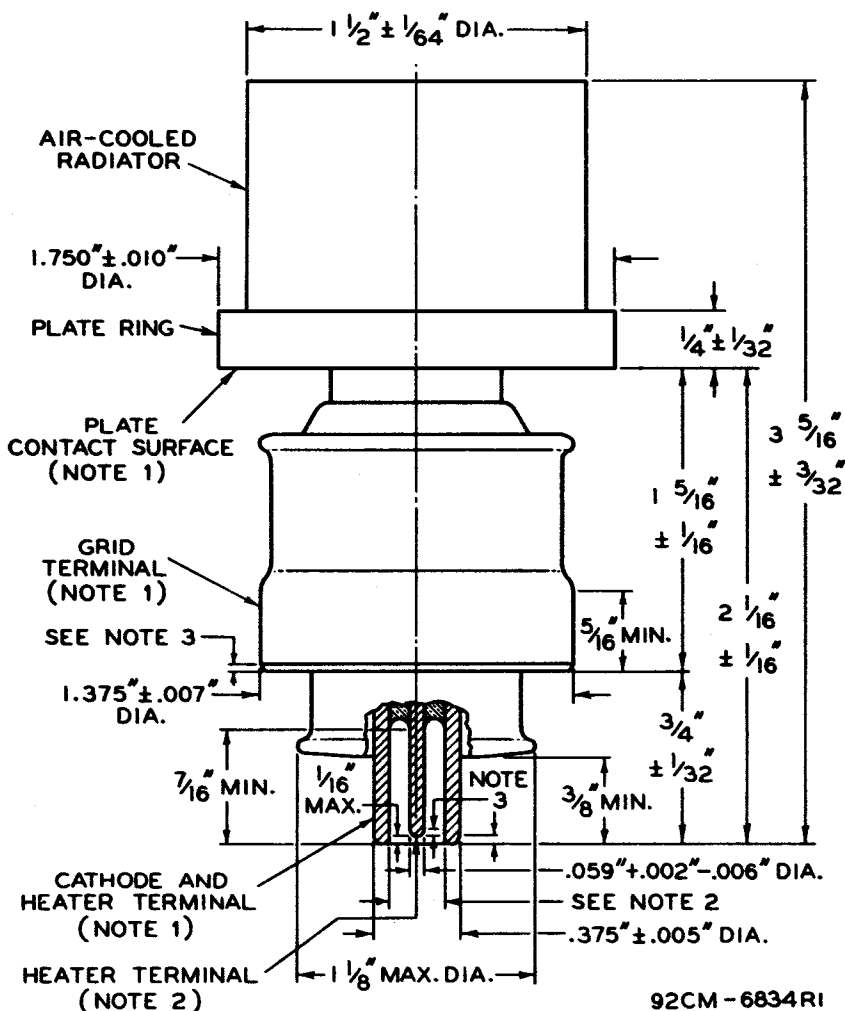

NOTE 1: WITH THE CYLINDRICAL SURFACES OF ITS GRID AND CATHODE TERMINALS CLEAN, SMOOTH, AND FREE OF BURRS, THE TUBE WILL ENTER A GAUGE AS SHOWN IN SKETCH G1. THE FOUR CYLINDRICAL HOLES H₁, H₂, H₃, and H₄ HAVE AXES COINCIDENT WITHIN 0.0005", LENGTHS DETERMINED FROM THE OUTLINE DRAWING, AND SUCCESSIVELY SMALLER DIAMETERS AS SHOWN IN THE SKETCH.

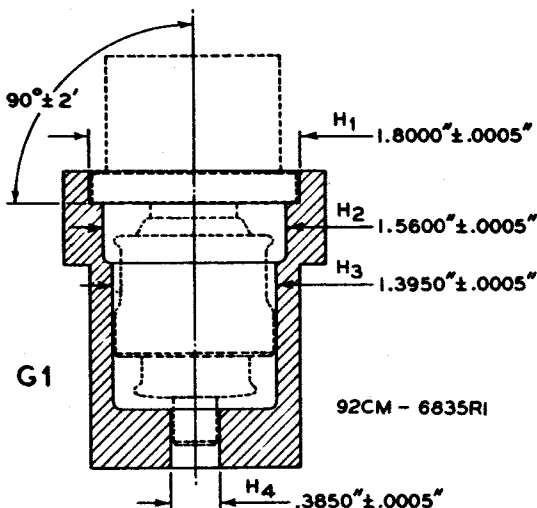

(continued on next page)

MARCH 1, 1951

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-6834R1-6835R1A



5588

5588


UHF POWER TRIODE

(continued from preceding page)

THE PLATE RING WILL BE ENTIRELY ENGAGED BY HOLE H_1 , AND THE CONTACT SURFACE OF THE PLATE RING WILL SEAT ON THE SHOULDER BETWEEN HOLES H_1 AND H_2 . THE PLANE SURFACE OF THIS SHOULDER IS $90^\circ \pm 2'$ TO THE AXES OF THE HOLES. SEATING IS DETERMINED BY FAILURE OF A 0.005" THICKNESS GAUGE, 1/8" WIDE, TO ENTER MORE THAN 1/16" BETWEEN THE SHOULDER SURFACE AND THE PLATE CONTACT SURFACE.


WITH THE TUBE PROPERLY SEATED AS DESCRIBED ABOVE, THE GRID TERMINAL WILL BE ENTIRELY ENGAGED BY HOLE H_3 , AND THE CATHODE TERMINAL WILL BE ENGAGED BY HOLE H_4 TO A DEPTH OF AT LEAST 1/4".

NOTE 2: CONCENTRICITY OF THE HEATER TERMINAL WITH RESPECT TO THE CATHODE TERMINAL IS DETERMINED BY A GAUGE AS SHOWN IN SKETCH G2. THE CYLINDRICAL HOLE H_5 AND THE ANNULAR HOLE H_6 HAVE AXES COINCIDENT WITHIN 0.0005", LENGTHS DETERMINED FROM THE OUTLINE DRAWING, AND DIAMETERS AS SHOWN IN THE SKETCH. THE CATHODE TERMINAL AND THE HEATER TERMINAL WILL ENTER THIS GAUGE TO A DEPTH OF 3/8".

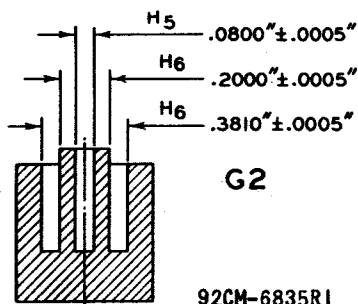


NOTE 3: ROUNDED OR BEVELED NOT TO EXCEED 1/16".

MOUNTING ARRANGEMENT
for use with coaxial-line
or cavity circuits

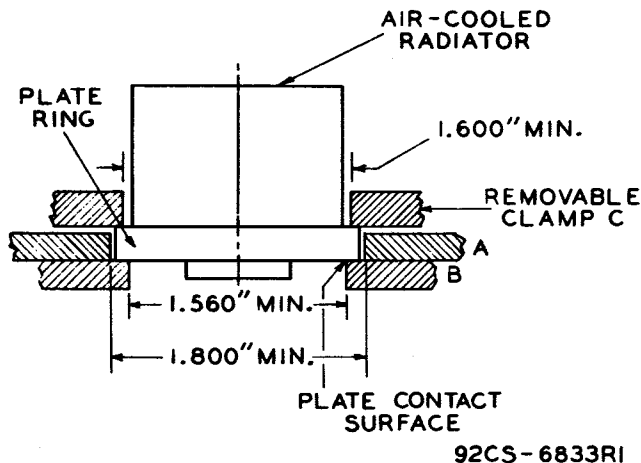



AIR-FLOW REQUIREMENTS

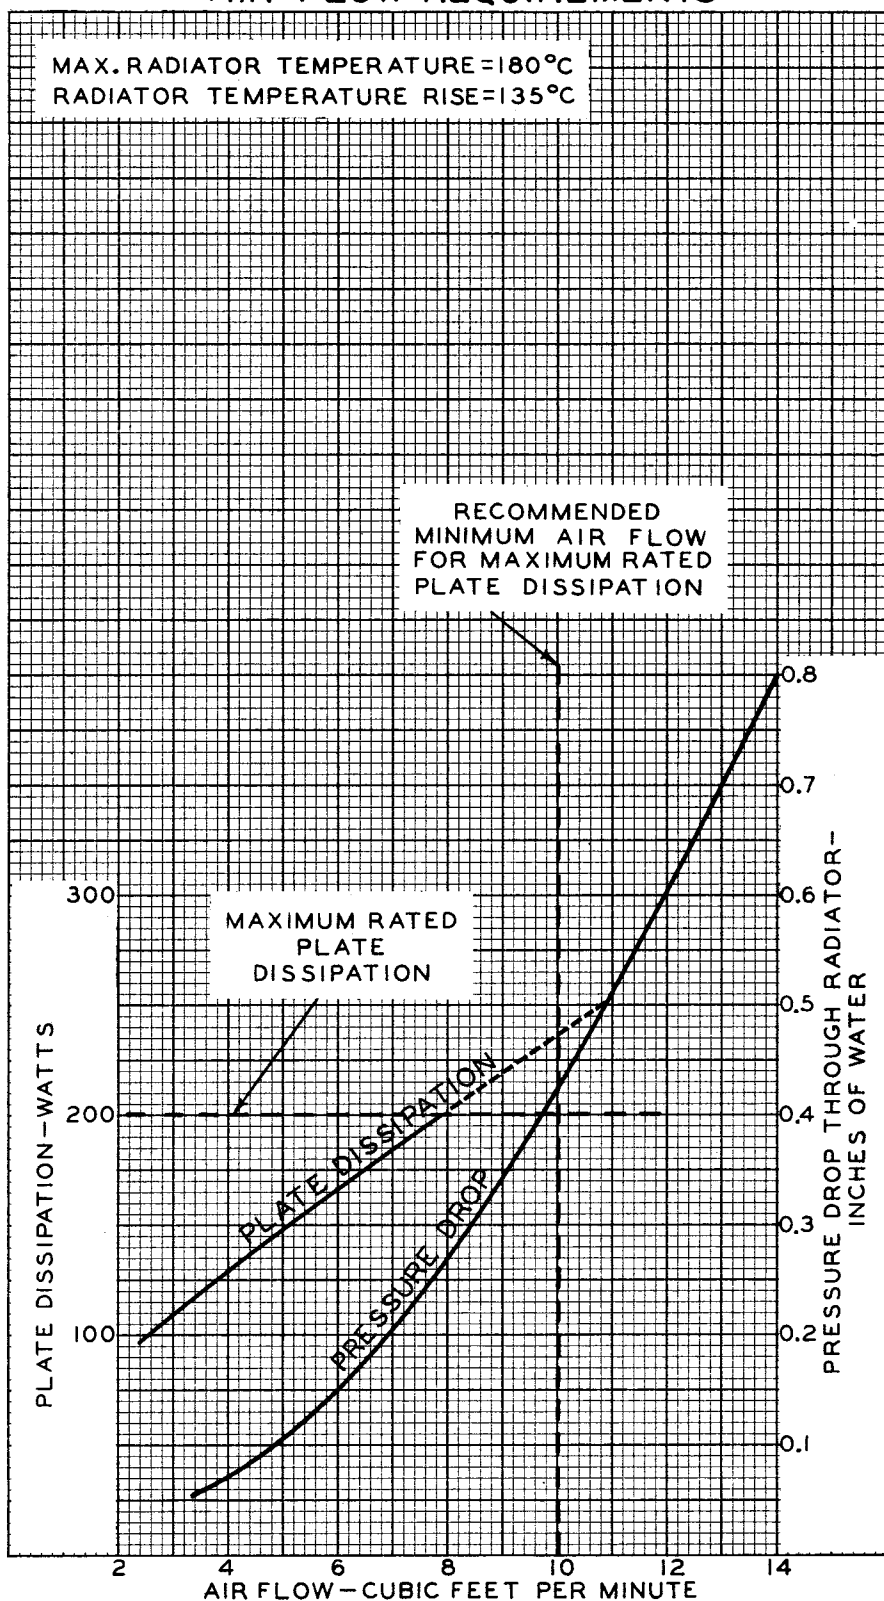




5588

5588

TYPICAL CHARACTERISTICS

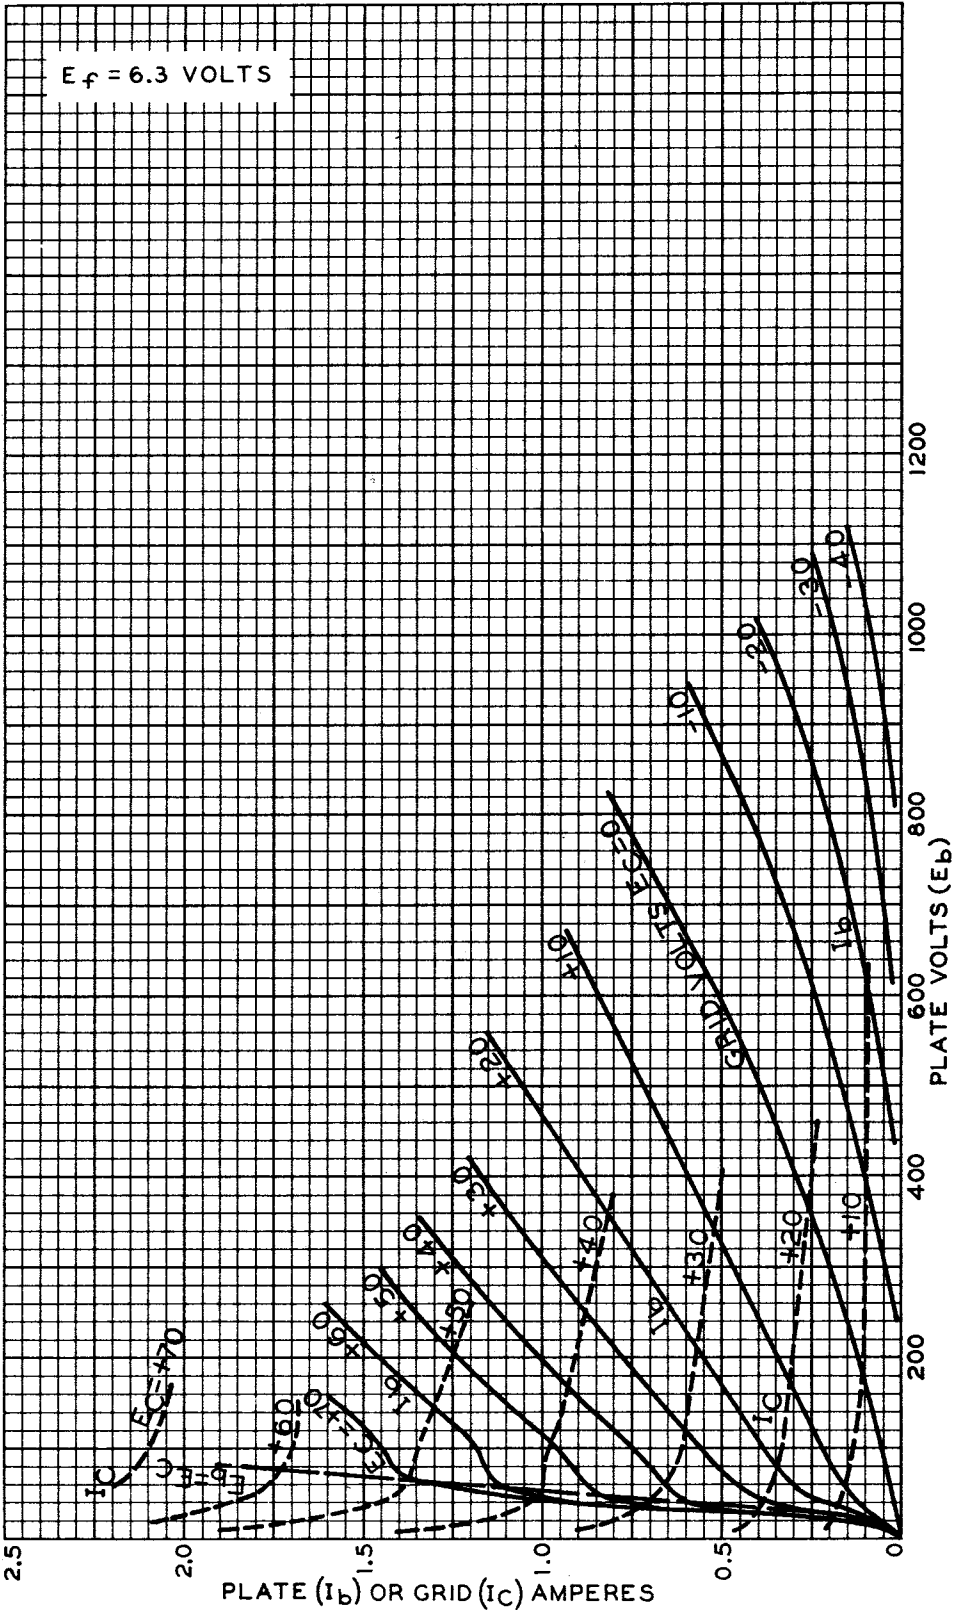

JAN. 7, 1947

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-6826

5588



5588

RECOMMENDED HEATER VOLTAGES - AMPLIFIER SERVICE

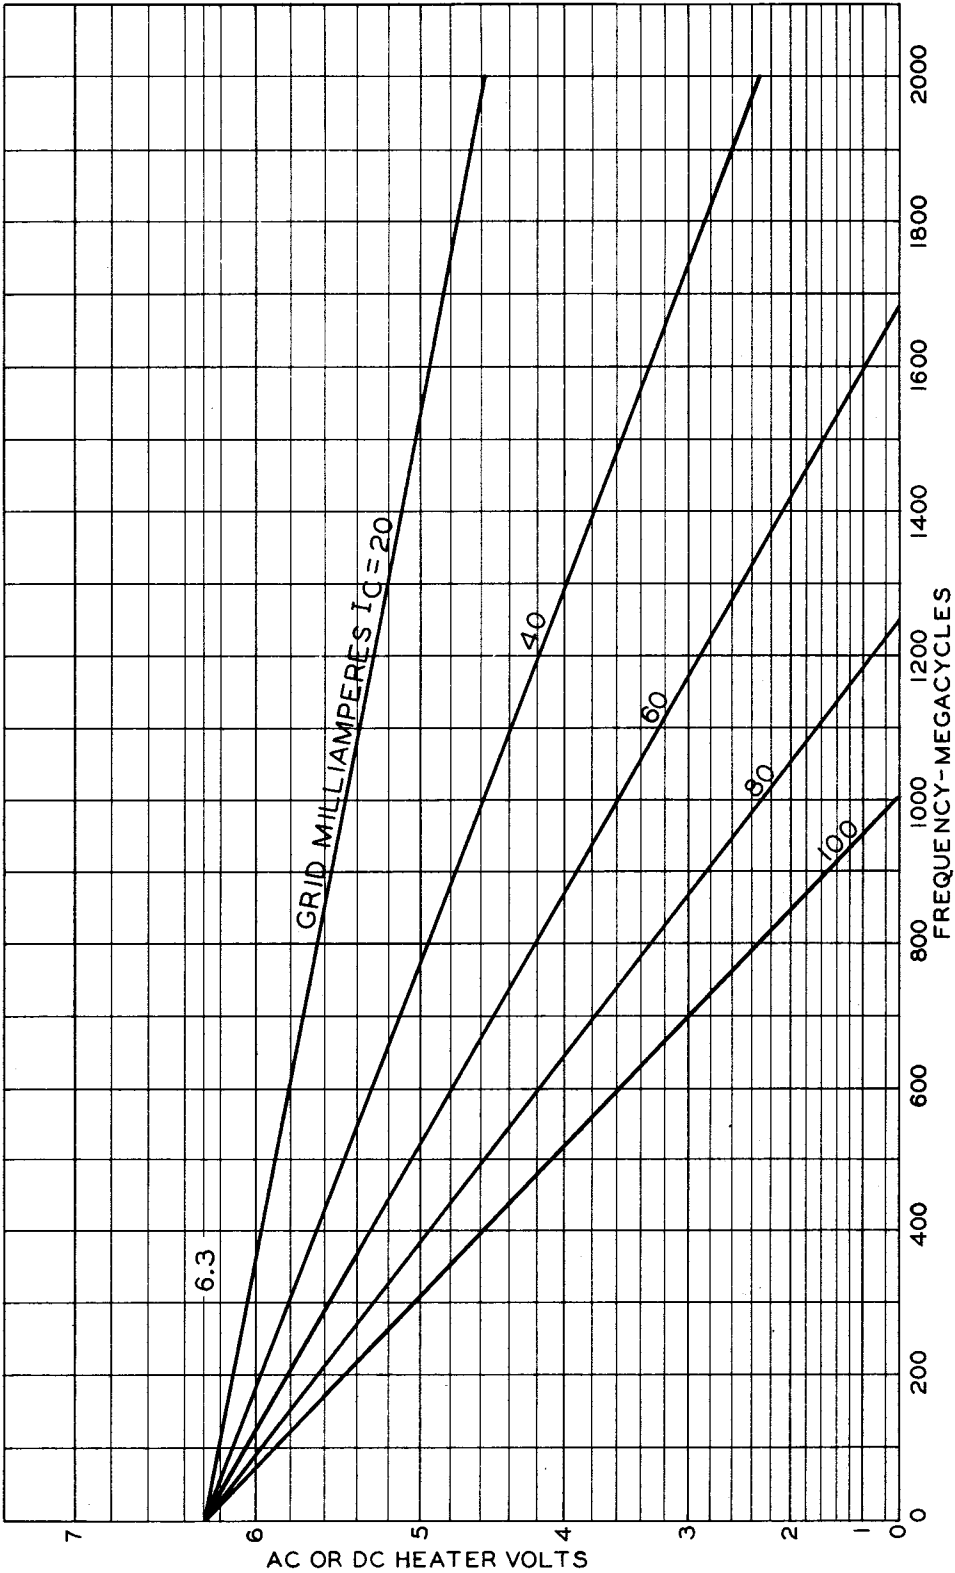

JAN. 29, 1947

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-6836



5588

5588

RECOMMENDED HEATER VOLTAGES— OSCILLATOR SERVICE

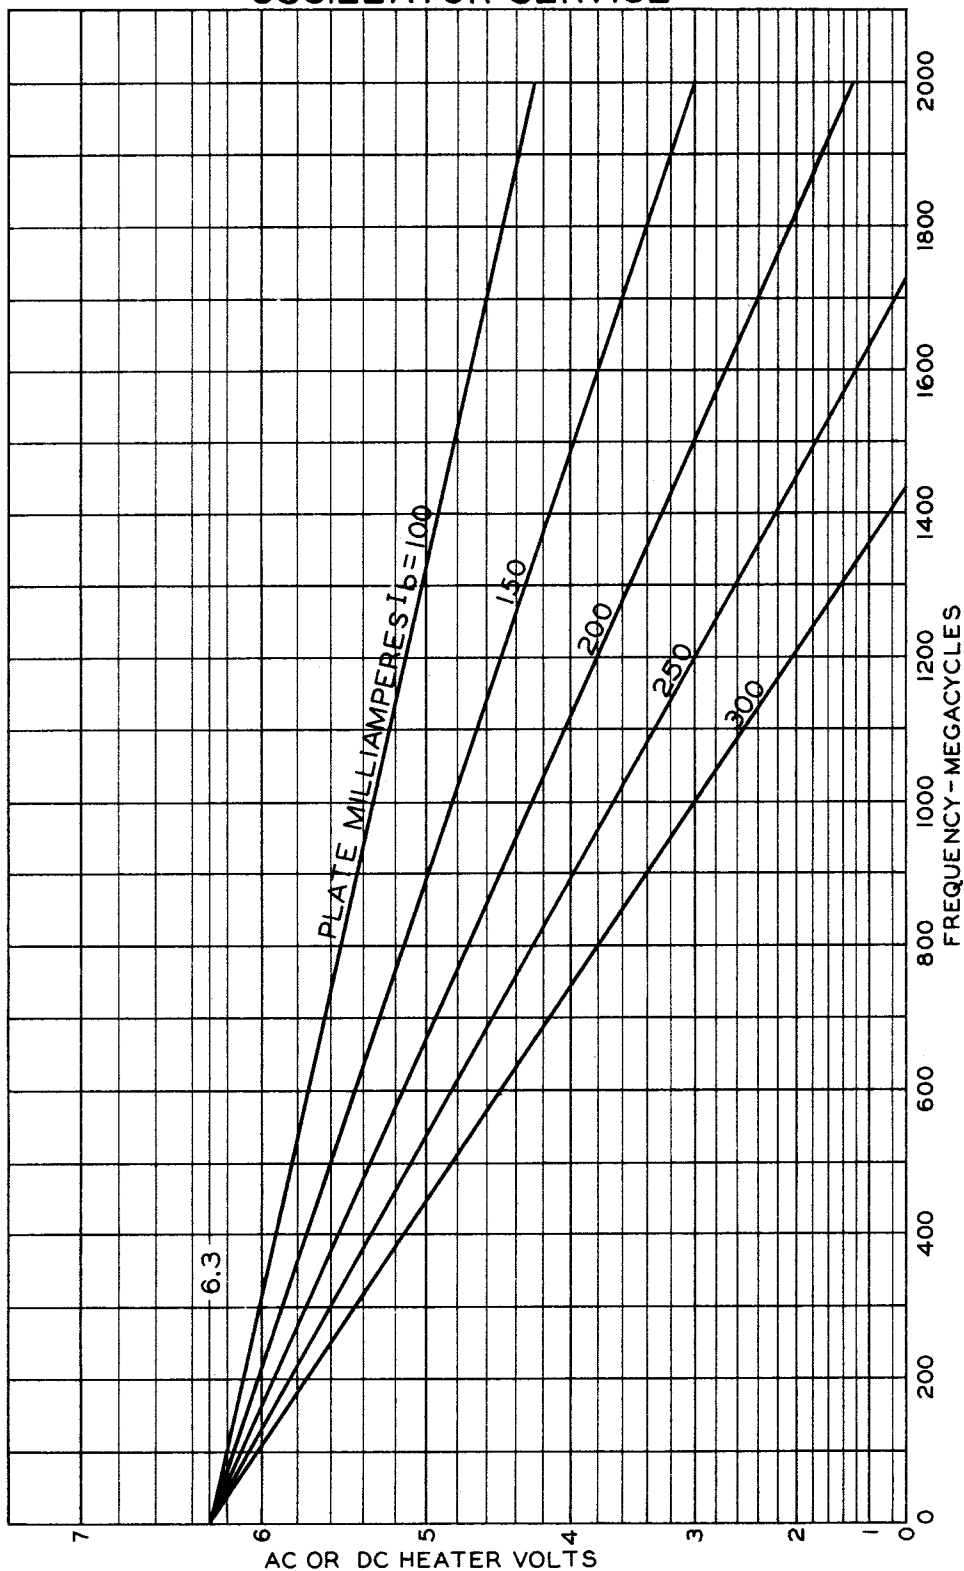

JAN.29,1947

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6837