



5763

5763

VHF BEAM POWER TUBE

9-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage 6.0 $\pm$ 10% ac or dc volts

Current 0.75 amp

Transconductance for plate

current of 45 ma. 7000 μ mhos

Mu-Factor, Grid No.2

to Grid No.1 16

Direct Interelectrode Capacitances:^oGrid No.1 to Plate 0.3 max. μ mfInput 9.5 μ mfOutput 4.5 μ mf^o With no external shield.

Mechanical:

Mounting Position Any

Maximum Overall Length 2-5/8"

Maximum Seated Length 2-3/8"

Length, Base Seat to Bulb Top (excluding tip) 2" $\pm$ 3/32"

Maximum Diameter 7/8"

Bulb T-6-1/2

Base Small-Button Noval 9-Pin (JETEC No.E9-1)

Basing Designation for BOTTOM VIEW 9K


Pin 1-Plate

Pin 2-No

Connection

Pin 3-Grid No.3

Pin 4-Heater



Pin 5-Heater

Pin 6-Grid No.2

Pin 7-Cathode

Pin 8-Grid No.1

Pin 9-Grid No.1

PLATE-MODULATED RF POWER AMPLIFIER--Class C Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

CCS*

ICAS**

Maximum Ratings, Absolute Values:

DC PLATE VOLTAGE 250 max. 300 max. volts

DC GRID-No.3 (SUPPRESSOR)

VOLTAGE 0 max. 0 max. volts

DC GRID-No.2 (SCREEN)

VOLTAGE 250 max. 250 max. volts

DC GRID-No.1 (CONTROL-

GRID) VOLTAGE -125 max. -125 max. volts

DC PLATE CURRENT 40 max. 50 max. ma

DC GRID-No.2 CURRENT 15 max. 15 max. ma

DC GRID-No.1 CURRENT 5 max. 5 max. ma

PLATE INPUT 10 max. 15 max. watts

GRID-No.2 INPUT 1.5 max. 1.5 max. watts

PLATE DISSIPATION 8 max. 12 max. watts

* , ** : See next page.

MAY 3, 1954

TUBE DIVISION

DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

5763



5763

VHF BEAM POWER TUBE

CCS*

ICAS**

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode . . .	100 max.	100 max.	volts
Heater positive with respect to cathode . . .	100 max.	100 max.	volts

BULB TEMPERATURE (At hottest point on bulb surface) .

250 max.	250 max.	°C
----------	----------	----

Typical Operation up to 30 Mc:

DC Plate Voltage	250	300	
Grid No.3	Connected to cathode at socket		
DC Grid-No.2 Voltage* . . .	250	250	volts
DC Grid-No.1 Voltage* . . .	-39	-42.5	volts
From a grid resistor of . . .	39000	18000	ohms
Peak RF Grid-No.1 Voltage .	46.5	53.5	volts
DC Plate Current	40	50	ma
DC Grid-No.2 Current	5.6	6	ma
DC Grid-No.1 Current (Approx.) . . .	1	2.4	ma
Driving Power (Approx.) . .	0.05	0.15	watt
Useful Power Output (Approx.)	6.4 [■]	10 [■]	watts

Maximum Circuit Values (CCS or ICAS Conditions):

Grid-No.1-Circuit Resistance	0.1 max.	megohm
--	----------	--------

RF POWER AMPLIFIER & OSCILLATOR--Class C Telegraphy[□] and

RF POWER AMPLIFIER--Class C FM Telephony

CCS*

ICAS**

Maximum Ratings, Absolute Values:

DC PLATE VOLTAGE	300 max.	350 max.	volts
DC GRID-No.3 (SUPPRESSOR) VOLTAGE	0 max.	0 max.	volts
DC GRID-No.2 (SCREEN) VOLTAGE	250 max.	250 max.	volts
DC GRID-No.1 (CONTROL-GRID) VOLTAGE	-125 max.	-125 max.	volts
DC PLATE CURRENT	50 max.	50 max.	ma
DC GRID-No.2 CURRENT	15 max.	15 max.	ma
DC GRID-No.1 CURRENT	5 max.	5 max.	ma
PLATE INPUT	15 max.	17 max.	watts

• obtained preferably from a separate source modulated with the plate supply, or from the modulated plate supply through a series resistor.

* obtained from grid-No.1 resistor or from a combination of grid-No.1 resistor with either fixed supply or cathode resistor.

□ Key down conditions per tube without amplitude modulation. Modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.

•, ••, ■: See next page.

→ Indicates a change

MAY 3, 1954

TUBE DIVISION

DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



5763

5763

VHF BEAM POWER TUBE

	CCS*	ICAS**	
GRID-No.2 INPUT	2 max.	2 max.	watts
PLATE DISSIPATION	12 max.	13.5 max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode	100 max.	100 max.	volts
Heater positive with respect to cathode	100 max.	100 max.	volts
BULB TEMPERATURE (At hottest point on bulb surface) . .	250 max.	250 max.	°C

Typical Operation up to 30 Mc:

DC Plate Voltage	300	350	volts
Grid No.3	Connected to cathode at socket		
DC Grid-No.2 Voltage	250	250	volts
DC Grid-No.1 Voltage*	-28.5	-28.5	volts
From a grid resistor of . .	18000	18000	ohms
Peak RF Grid-No.1 Voltage . .	37.5	37	volts
DC Plate Current	50	48.5	ma
DC Grid-No.2 Current	6.6	6.2	ma
DC Grid-No.1 Current (Approx.)	1.6	1.6	ma
Driving Power (Approx.) . . .	0.1	0.1	watt
Useful Power Output (Approx.)	10.3 [■]	12 [■]	watts ←

Typical Operation at 50 Mc:

DC Plate Voltage	300	-	volts
Grid No.3	Connected to cathode at socket		
DC Grid-No.2 Voltage	250	-	volts
DC Grid-No.1 Voltage*	-60	-	volts
From a grid resistor of . .	22000	-	ohms
Peak RF Grid-No.1 Voltage . .	80	-	volts
DC Plate Current	50	-	ma
DC Grid-No.2 Current	5	-	ma
DC Grid-No.1 Current (Approx.)	3	-	ma
Driving Power (Approx.) . . .	0.35	-	watt
Useful Power Output (Approx.)	7 [■]	-	watts ←

Maximum Circuit Values (CCS or ICAS Conditions):

Grid-No.1-Circuit Resistance	0.1 max.	megohm
--	----------	--------

FREQUENCY MULTIPLIER

Maximum CCS* Ratings, Absolute Values:

DC PLATE VOLTAGE	300 max.	volts
DC GRID-No.3 (SUPPRESSOR) VOLTAGE	0 max.	volts
DC GRID-No.2 (SCREEN) VOLTAGE	250 max.	volts
DC GRID-No.1 (CONTROL-GRID) VOLTAGE . . .	-125 max.	volts
DC PLATE CURRENT	50 max.	ma

* Continuous Commercial Service.

** Intermittent Commercial and Amateur Service.

●, ■: See next page.

← Indicates a change

MAY 3, 1954

TUBE DIVISION

DATA 2

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

5763



5763

VHF BEAM POWER TUBE

DC GRID-No.2 CURRENT	15 max.	ma
DC GRID-No.1 CURRENT	5 max.	ma
PLATE INPUT	15 max.	watts
GRID-No.2 INPUT	2 max.	watts
PLATE DISSIPATION	12 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode .	100 max.	volts
Heater positive with respect to cathode .	100 max.	volts
BULB TEMPERATURE (At hottest point on bulb surface)	250 max.	°C

Typical Operation:

Doubler Tripler
to 175 Mc to 175 Mc

DC Plate Voltage	300	300	volts
Grid No.3	Connected to cathode at socket		
DC Grid-No.2 Voltage	*	*	volts
DC Grid-No.1 Voltage*	-75	-100	volts
From grid resistor of	75000	100000	ohms
Peak RF Grid-No.1 Voltage	95	120	volts
DC Plate Current	40	35	ma
DC Grid-No.2 Current	4	5	ma
DC Grid-No.1 Current (Approx.)	1	1	ma
Driving Power (Approx.)	0.6	0.6	watt
Useful Power Output (Approx.)	2.1 [■]	1.3 [■]	watts

Maximum Circuit Values (For maximum rated conditions):

→ Grid-No.1-Circuit Resistance	0.1 max.	megohm
--	----------	--------

→ CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Heater Current	1	0.69	0.81	amp
Grid No.1-Plate Capacitance	2	-	0.3	μmf
Input Capacitance	2	8.0	11.0	μmf
Output Capacitance	2	3.8	5.2	μmf
Transconductance	1,3	5100	8900	μmhos
Plate Current	1,3	33	57	ma
Grid-No.2 Current	1,3	-	10	ma
Reverse Grid-No.1 Current	1,4	-	2	μamp

NOTE 1: With 6 volts ac or dc on heater.

NOTE 2: With no external shield.

NOTE 3: With dc plate voltage of 250 volts, dc grid-No.2 voltage of 250 volts, and dc grid-No.1 voltage of -7.5 volts.

NOTE 4: With dc plate voltage of 250 volts, dc grid-No.2 voltage of 250 volts, dc grid-No.1 voltage of -7.5 volts, and grid-No.1-circuit resistance of 0.1 megohm.

⊗ Obtained from a fixed supply, or by a grid-No.1 resistor of value shown.

■ This value of useful power is measured at load of output circuit.

Data on Operating Frequencies for the 5763 are given
on the sheet TRANS. TUBE RATINGS vs FREQUENCY

→ Indicates a change

MAY 3, 1954

TUBE DIVISION

DATA 2


RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



5763

5763


AVERAGE CHARACTERISTICS

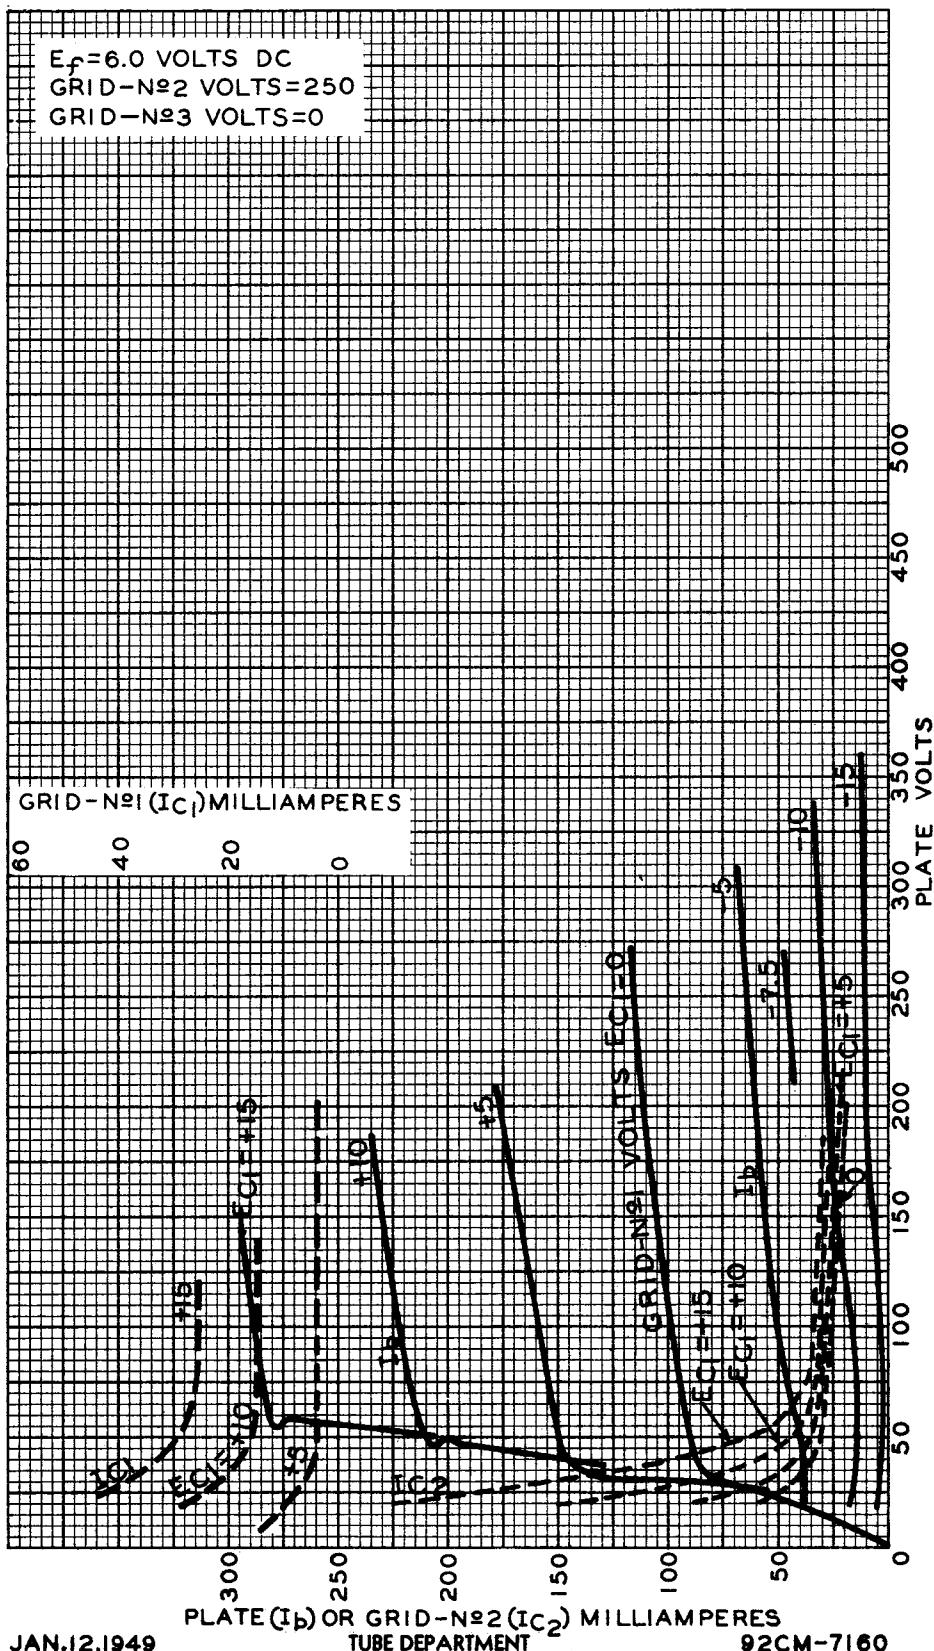

5763



5763

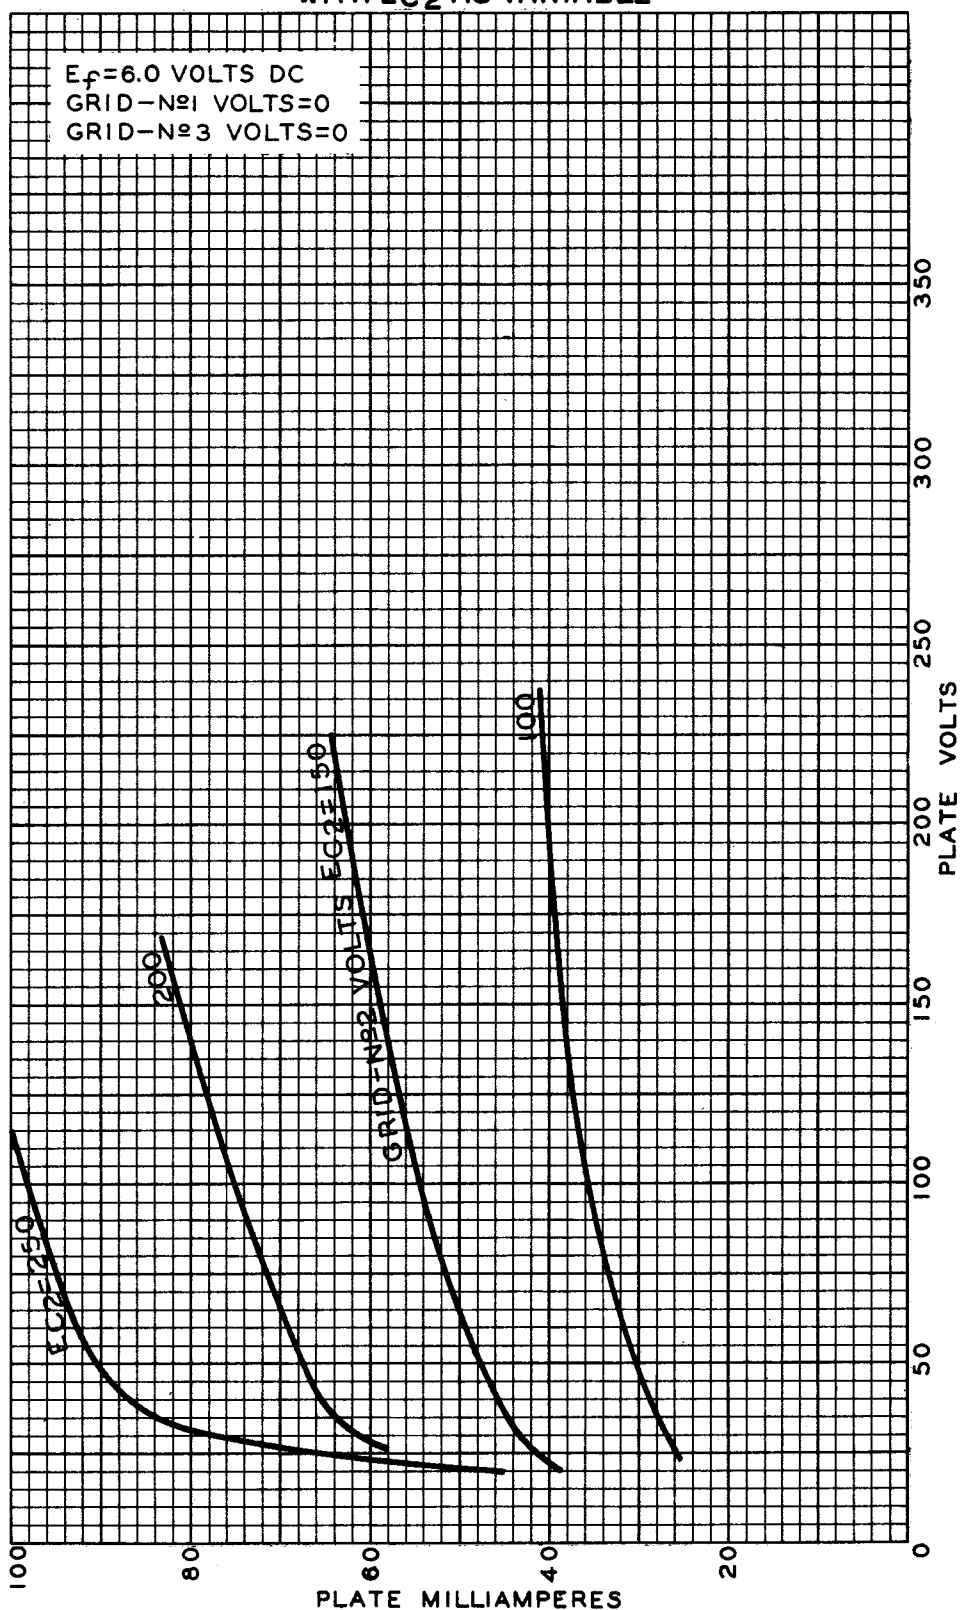AVERAGE PLATE CHARACTERISTICS
WITH E_{C2} AS VARIABLE

JAN. 10, 1949

TUBE DEPARTMENT

92CM-7159

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY