




## TH 312 TRIODE

The TH 312 is a forced air cooled, ceramic metal triode of coaxial structure. This tube is specially designed for highly linear amplifier operating up to 1000 MHz without grid current in T.V. translators handling both sound and vision signals in the same channel with a cross-modulation better than 52 dB.

The anode is capable to dissipate 1200 W maximum.

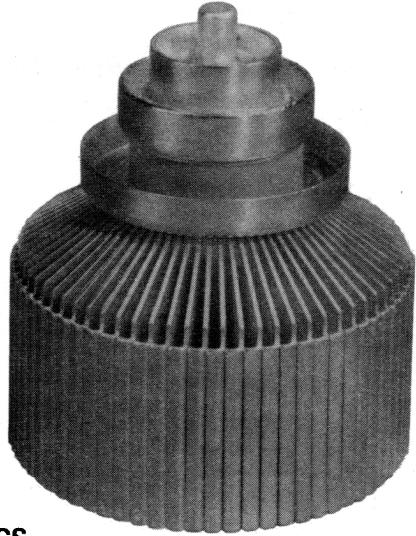

### GENERAL CHARACTERISTICS

#### Electrical

Type of cathode .....	thoriated tungsten	
Type of heating .....	direct	
Heater voltage (1) .....	3.5	V
Heater current, approximate .....	35	A
Interelectrode capacitances :		
- grid-anode .....	8.5	pF
- grid-cathode (cold) .....	27	pF
- anode-cathode (cold) .....	0.15	pF
Amplification factor .....	65	
Transconductance .....	40	mA/V

#### Mechanical

Mounting position .....	vertical	
Anode cooling .....	forced air	
Minimum air flow (dissipation power 1200 W and inlet air temperature 25 °C) .....	1.5	m <sup>3</sup> /mn
Maximum inlet air temperature .....	40	°C
Maximum outlet air temperature .....	100	°C
Anode maximum temperature .....	250	°C
Grid and cathode terminals : maximum temperature (2) .....	250	°C
Dimensions .....	see drawing	
Net weight, approximate .....	1	kg

- (1) In high frequency operation the cathode is subjected to considerable back bombardment which raises its temperature. After the circuit has been adjusted for proper tube operation, the heater voltage must be reduced to prevent overheating of the cathode with resulting short life. Ask for information for any special applications.
- (2) For maximum life, temperature should not exceed 200 °C. The cooling airflow must be established before application of any electrode voltage and maintained during 3 minutes at least after heater voltage has been removed.



**THOMSON-CSF**  
GROUPEMENT TUBES ELECTRONIQUES

## CLASS A - LINEAR AMPLIFIER FOR TELEVISION TRANSLATORS

### HANDLING BOTH SOUND AND VISION SIGNALS

#### C.C.I.R. STANDARD

#### MAXIMUM RATINGS

Anode D.C. voltage .....	3	kV
Grid D.C. voltage .....	-300	V
Anode D.C. current .....	0.8	A
Peak cathode current .....	4	A
Anode dissipation power .....	1200	W
Frequency .....	1000	MHz

#### TYPICAL OPERATION (Note 3)

Operating frequency .....	780	MHz
Anode D.C. voltage .....	2.8	kV
Grid D.C. voltage, approximate .....	-30	V
Anode D.C. current .....	0.38	A
Gain .....	13	dB
Video output power .....	200	W
Cross modulation level (3 tones test) .....	$\geq 52$	dB*

\* under video level

- (3) In order to achieve long tube life, maximum operating efficiency and circuit stability consistent with the full tube capability, electrode voltage supplies should be applied in the following order :

- $\frac{1}{2}$  Vf (filament voltage) during 60 s ;
- Nominal Vf during 60 s ;
- Grid voltage ;
- Anode voltage.




**THOMSON-CSF**  
GROUPEMENT TUBES ELECTRONIQUES

DATA TEG 2034


TH 312

December 1970 - Page 3/3

### OUTLINE DRAWING

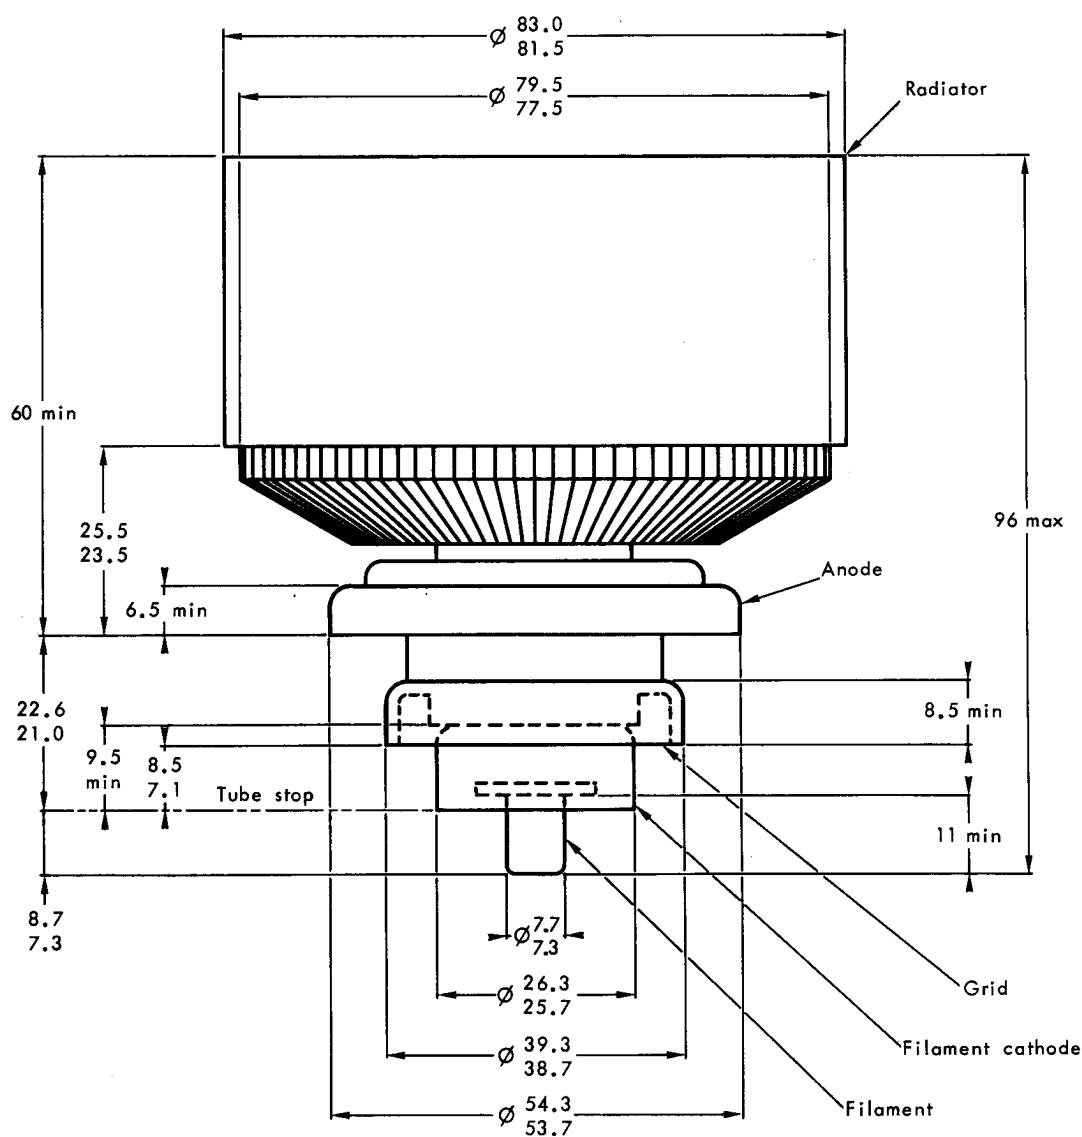

Dimensions in mm.





**THOMSON-CSF**  
GROUPEMENT TUBES ELECTRONIQUES