

# Central ELECTRONIC

## MANUFACTURERS

DENVILLE, NEW JERSEY

GAS NOISE TUBE	C
6356	15.3 Db

References and notations contained herein are taken from Military Specifications for Electron tubes MIL-E-1D 31 March '58.

Description: Gaseous Discharge Diode, C Band (Note 11)

Ratings:

	$I_f$ mA	$I_b$ mAdc	TA °C	T Bulb °C
Absolute Maximum:	..	..	+85	+125
Minimum:	..	..	-55	..
Test Conditions:	0	250	..	..

Cathode: Filamentary Type.

Dimensions: Per Outline Drawing (Fig. 1)

Base: Per Outline Drawing (Fig. 1)

Mounting Position: Any

Ref. Para.	Test	Conditions	Min.	Max.
...	Qualification:	Required.		
4.5	Holding Period:	168 hours		
4.9.18.1.10	Carton Drop:	...		
4.9.20.3	*Vibration:	No Voltages, Note 9.		
4.10.5.1	Filament Voltage:	$I_f = 170$ mAdc	$E_f$ ---	10Vdc
4.13.2	Tube Voltage Drop:	Notes 1, 2	$E_{td} 80$	90Vdc
...	Excess Noise Ratio:	F = 5650 Mc. Notes 3, 4, 5, 10	$N_r - 1$ 15.05	15.45 Db
...	Match (1):	F = 5650 Mc. Notes 4, 6 $I_b = 250$ mAdc	VSWR	1.12:1
...	*Match (2):	F = 5650 Mc. $I_b = 0$ mAdc Notes 4, 6	VSWR	1.12:1
...	Intermittent Life Test	Notes 1, 3, 8, 9 (One min. on, Two min. off) Preheat time = 2 to 3 sec.	2500	... Cycles
4.11.4	Intermittent Life Test End Points Excess Noise Ratio: Note 11.		$N_r - 1$ 15.0	15.5 Db

- Note 1. The tube shall be tested in the circuit of Fig. 3.
- Note 2. In the test circuit of Fig. 3, with a filament current of 170 mAdc, the tube shall operate within three tries.
- Note 3. The tube shall be tested in total darkness.
- Note 4. The tube shall be tested in a tube mount as specified in Figure 2, or equivalent, terminated by a matched RG-49/U termination having a VSWR no greater than 1.01:1, such as Hewlett-Packard G-914A, or equivalent.  
Excess Noise Ratio Measurement tests shall be made using the circuit of block diagram Fig. 2, or equivalent.
- Note 5. The frequency specified is that of the Local Oscillator.

- Note 6. The frequency specified is that of the Signal Generator.
- Note 7. Excess noise ratio should be measured by comparison with an approved standard.
- Note 8. The tube shall be tested at an ambient temperature of +85°C.
- Note 9. Intermittent Life Test end points shall apply.
- Note 10. The Excess Noise Ratio ( $N_r - 1$ ) is defined in Db as  $N_r - 1 = 10 \log \left( \frac{T_e - 1}{290} \right)$  where  $T_e$  is the effective electron temperature.
- Note 11. The noise frequencies generated by this tube cover a broad band of frequencies. This bandwidth is limited only by the type of mount used. This tube is normally used with a mount in RG-49/U or RG-50/U wave guide, at a 10 degree angle in the E plane. Other wave guide sizes may be used with properly adapted mounts.

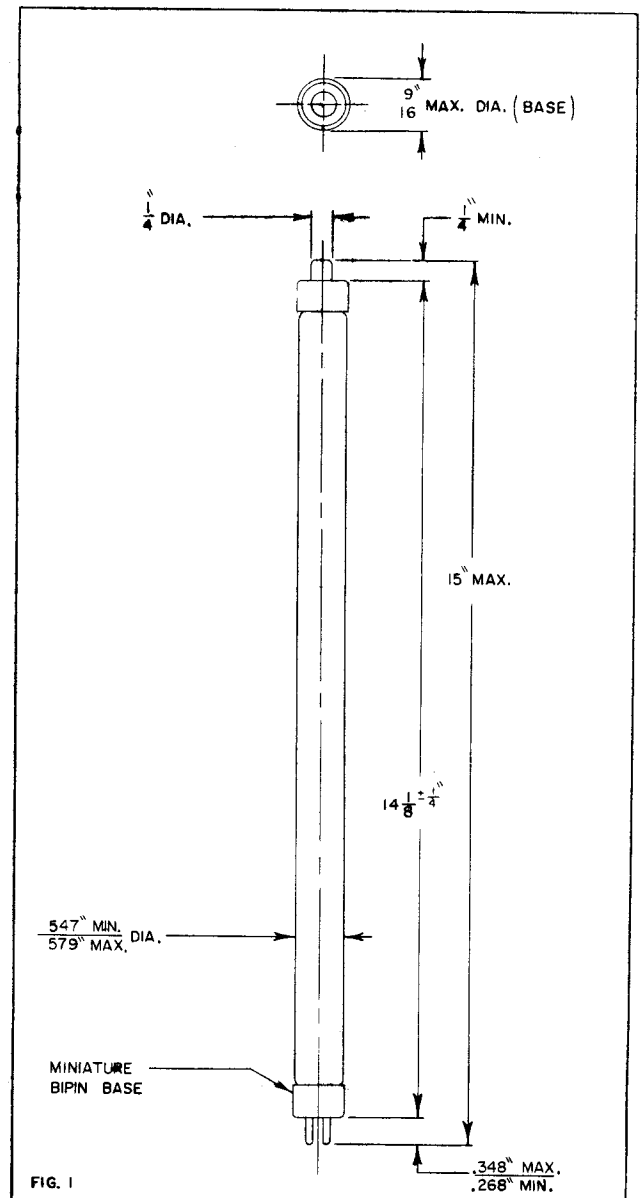


FIG. 1



# Central ELECTRONIC

MANUFACTURERS

DENVILLE, NEW JERSEY



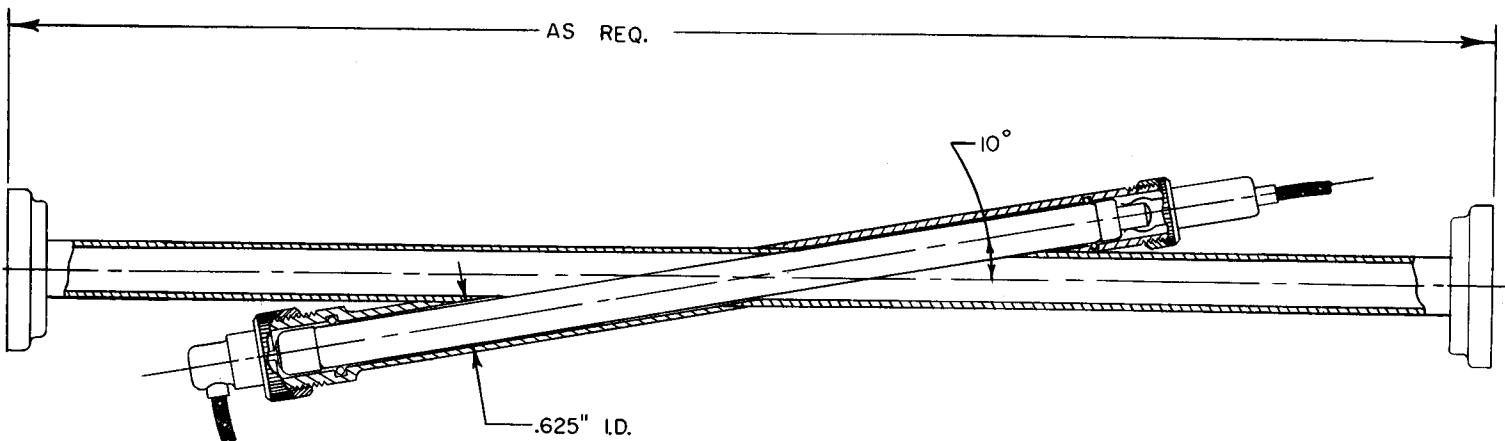


FIG. 2

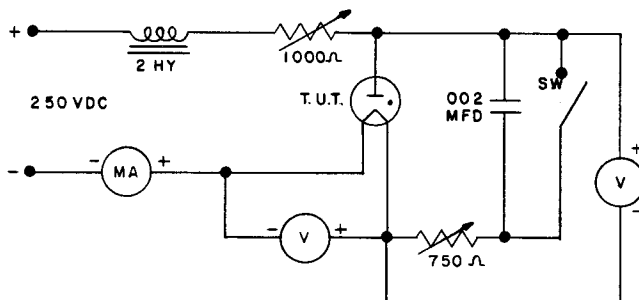

D. C. TEST CIRCUIT

FIG. 3

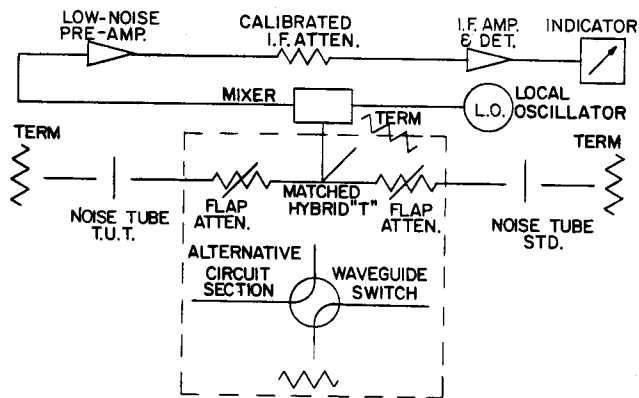

TEST CIRCUIT FOR EXCESS NOISE MEASUREMENTS  
FIG. 4

