

Color Picture Tube

Perma-Chrome Banded-Type Implosion Protection
 90° Rectangular HI-LITE Screen
 New Rare-Earth (Red) Phosphor Unity Current Ratios

This data sheet is to be used in
 conjunction with data for RCA-22UP22.

For general data, maximum and minimum ratings, equipment design ranges, limiting circuit values, x-radiation warning, and base specification of the 22WP22, refer to the 22UP22 except as noted below.

MECHANICAL


Tube Dimensions (excluding mounting lugs):

Diagonal	21.971 ± .093 in (558.06 ± 2.36 mm)
Greatest Width	19.118 ± .093 in (485.60 ± 2.36 mm)
Greatest Height (including tension-band clip)	15.527 ± .100 in (394.39 ± 2.54 mm)
Weight (Approx.)	29 lb (13.3 kg)

DIMENSIONAL OUTLINE

Dimensions shown are only those which are different from the corresponding dimensions for the 22UP22.


Top View

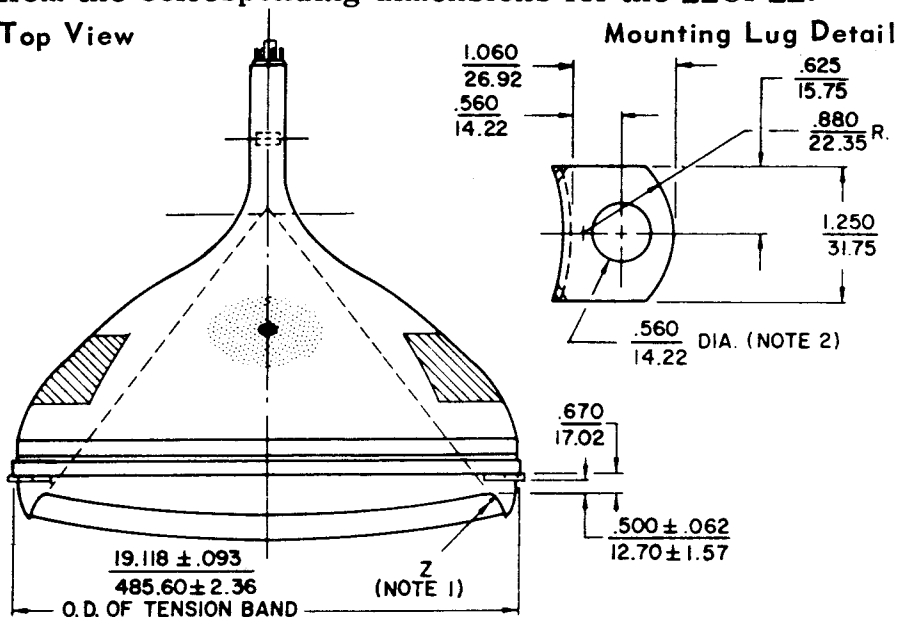


22WP22

DIMENSIONAL OUTLINE (Cont'd)

Front View

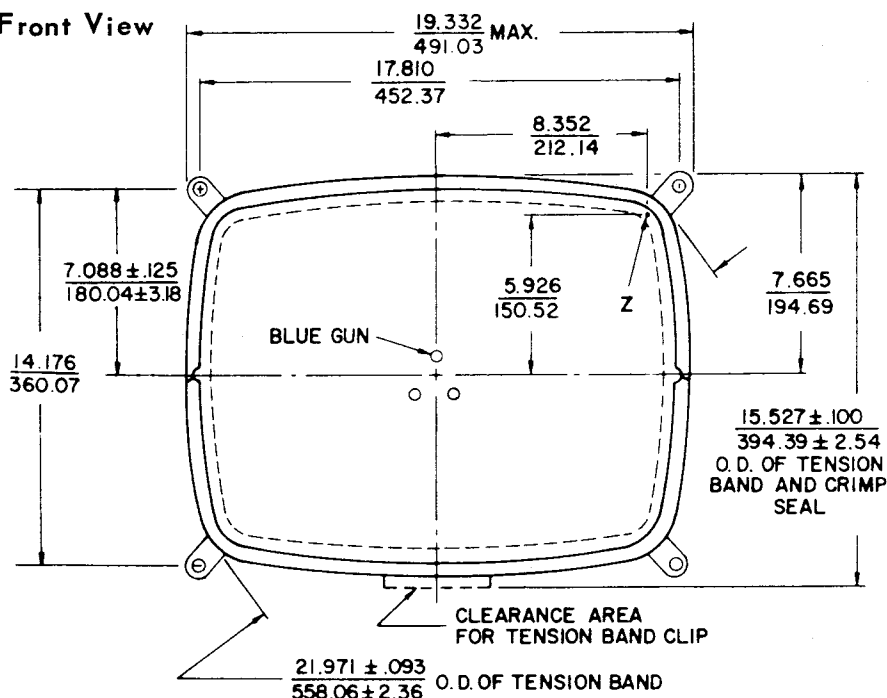

Front Side View

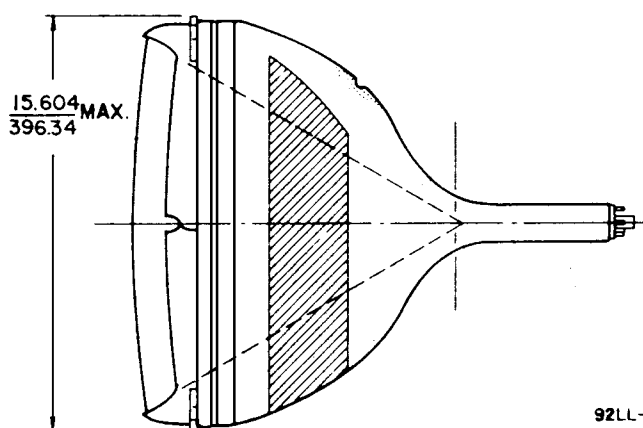

92LL-2396R3

Dimensions in $\frac{\text{Inches}}{\text{mm}}$ unless otherwise noted

Note 1: "Z" is located on the outside surface of the faceplate, on the screen diagonal at a point .125" beyond the minimum screen. This point is used as a reference for the mounting lugs.

Note 2: The tolerance of the mounting lug holes will accommodate mounting screws up to 0.375 in (9.5 mm) in diameter when positioned on the true hole centers.