



## HIGH-MU TWIN TRIODE 7729

CBS Type 7729 is a miniature high-mu twin triode which is especially designed and tested for use in measurement test equipment, instrumentation, and other applications where extreme reliability, stable characteristics, and long life are required. The 7729 is a replacement for type 12AX7 and superior performance is assured because of its improved construction, special tests, and tight minimum-maximum limits.

This electron tube has a continuous-wound coil heater which is superior to ordinary heaters both electrically and mechanically. Burn-outs are virtually eliminated, heater-cathode leakage is lower, and hum is lower. Further insurance of quality is provided by heater cycle testing.

Stable characteristics throughout life is a result of meticulous processing and selection of cathode sleeve material. Also each tube is subjected to a 48 hour burn-in period to obtain a more uniform level of performance when they are put into operational service.

An elaborate testing procedure is carried out on these tubes for confidence in their ultimate operation. There is a 100-hour early life assurance test, a special 1000-hour life test, and a 5000-hour informational life test.

Additional mechanical features offered by CBS type 7729 include: gold plated base pins which prevent oxidation and improve base pin contact; precisely made and fitted parts in stronger structures for lower noise and microphonism; and electrical features include: initial plate current balance, life tested plate current balance, grid current test, and reverse grid current test.


### MECHANICAL DATA

Cathode, coated unipotential

Bulb	T-6 1/2
Outline	JEDEC 6-2
Base	Miniature 9-pin (E9-1)
Basing	9A
Mounting position	Any

### PIN CONNECTIONS

Pin 1: Plate (Section 2)  
 Pin 2: Grid 1 (Section 2)  
 Pin 3: Cathode (Section 2)  
 Pin 4: Heater  
 Pin 5: Heater  
 Pin 6: Plate (Section 1)  
 Pin 7: Grid (Section 1)  
 Pin 8: Cathode (Section 1)  
 Pin 9: Heater Center Tap



### ELECTRICAL DATA

#### HEATER CHARACTERISTICS

	Series	Parallel	
Voltage, a-c or d-c	12.6 $\pm$ 10%	6.3 $\pm$ 10%	volts
Current	150	300	ma
Peak heater-cathode voltage, max.			
Heater negative to cathode	200	200	volts
Heater positive to cathode*	200	200	volts

\*D-c component must not exceed 100 volts

#### DIRECT INTERELECTRODE CAPACITANCES

	Section 1	Section 2	
Grid to plate: g1 to p	1.7	1.7	uuf
Input: g1 to k+h	1.6	1.6	uuf
Output: p to k+h	0.46	0.34	uuf

#### MAXIMUM RATINGS (Design maximum values)

##### Each Section


Plate voltage	330	volts
Plate dissipation	1.1	watts
Cathode current	20	ma
Control grid voltage, negative d-c	55	volts
Control grid voltage, positive d-c	0	volts
Bulb temperature	165	°C

#### CHARACTERISTICS AND TYPICAL OPERATION


##### Class A Amplifier - Each Section

Plate voltage	100	250	volts
Control grid voltage	-1.0	-2.0	volts
Plate resistance (approx.)	80000	62500	ohms
Transconductance	1250	1600	umhos
Amplification factor	100	100	
Plate current	0.5	1.2	ma

### AVERAGE PLATE CHARACTERISTICS

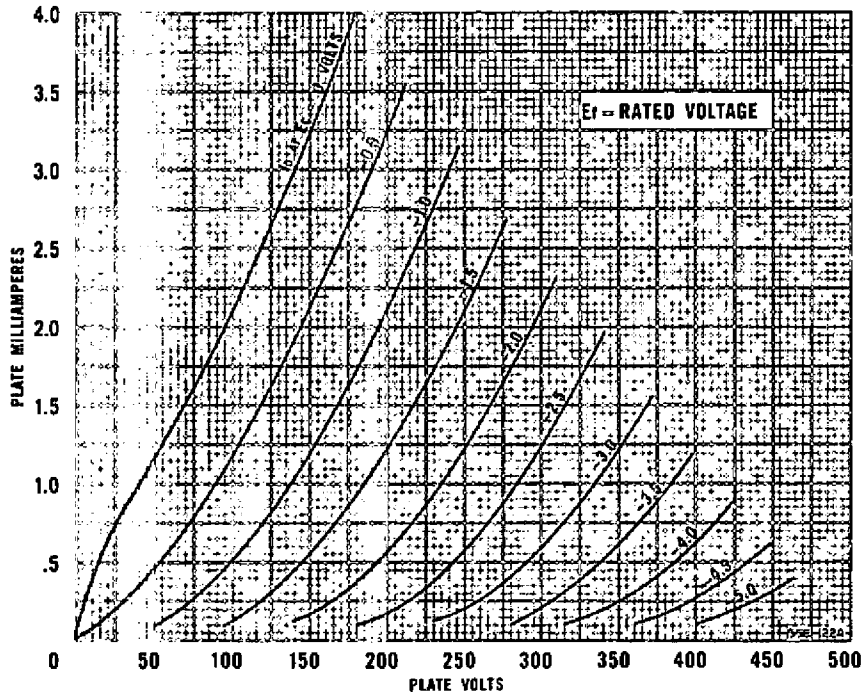

### AVERAGE TRANSFER CHARACTERISTICS EACH UNIT

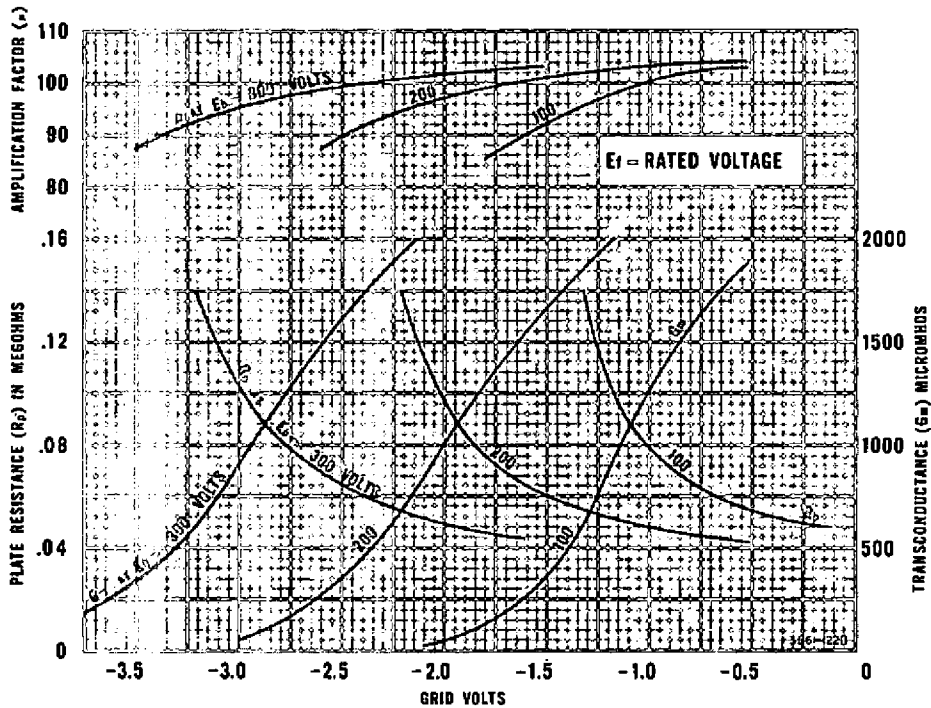



# CUSTOMER ACCEPTANCE SPECIFICATION

## Test Conditions

12.6 series connection or 6.3 parallel connection     $E_b = 250 \text{ Vdc}$   
 $E_c = -2 \text{ Vdc}$

<u>Reference</u>	<u>AQL</u>	<u>Test</u>	<u>Conditions</u>	<u>Sym.</u>	<u>Min.</u>	<u>Max.</u>	<u>Unit</u>
Note 2	Note 1						
4.7.5	0.4	Continuity & Short		---	---	---	---
4.10.8	2.5*	Heater Current	$E_f = 12.6\text{V}$ $E_f = 6.3\text{V}$	$I_f$ $I_f$	138 275	162 325	mA mA
4.10.15	1.0	Heater Cathode Leakage	$E_{hk} = +200 \text{ Vdc}$ $E_{hk} = -200 \text{ Vdc}$	$I_{hk}$ $I_{hk}$	0 0	5.0 5.0	$\mu\text{A dc}$ $\mu\text{A dc}$
4.10.6.1	1.0	Grid Current (1)	Note 4	$I_c(1)$	---	-0.5	$\mu\text{A dc}$
---	2.5	Grid Block (2)	$E_b = 67.5 \text{ Vdc}$ $E_c = 0$ ; Note 6, 3	$E_1 C_1$	0	-1.5	Vdc
4.10.4.1	4.0	Plate Current (1)	$E_c = -5 \text{ Vdc}$ Note 3	$I_b(1)$	---	35	$\mu\text{A dc}$
4.10.4.1	1.0	Plate Current (2)	Note 3	$I_b(2)$	0.75	1.75	mAdc
4.10.4.1	1.0	Plate Current Differential	Note 12	$\Delta I_b(2)$		20	%
4.10.9	2.5	Transconductance (1)	Note 3	$S_m(1)$	1200	2000	umhos
4.10.9	2.5	Transconductance (2)	$E_f = 90\%$ of $E_f$ used in $S_m(1)$ test Note 3	$\Delta S_m$	---	15	%
---	1.0	Pulse Emission	$E_b = 200 \text{ Vdc}$ , $E_{c1} = 25\text{Vdc}$ Notes 3, 5	$I_{sp}$	200		mA
4.10.3.4	2.5	Noise & Microphonics	$R_p = 200\text{K}$ , $E_{bb} = 250\text{Vdc}$ , $E_{cc} = -2\text{Vdc}$ M Note 4, 13, $R_g = 50\text{K}$ , $E_{cal} = 85\text{mV ac}$		---	---	---
---	2.5	Contact Potential	$E_b = 150\text{Vdc}$ , $E_{c1} = 0$ , $R_g/g = 2.2 \text{ meg}$ Notes 3, 11	$E_{cp}$	0	-1.0	Vdc
4.8	2.5	Insulation of Electrodes	$E\{g_1\text{-all}\} = 100\text{Vdc}$ $g_1$ Negative $E\{p\text{-all}\} = 300 \text{ Vdc}$ $p$ Negative Note 3	$R\{g\text{-all}\}$ $R\{p\text{-all}\}$	1000 1000	---	meg meg
<b>LIFE TESTS</b>							
---	1.0 Code K	Early Life Assurance Test	$E_f = 6.3\text{V}$ or $12.6\text{V}$ $E_b = 250\text{Vdc}$ $E_c = -2\text{Vdc}$ $E_{hk} = -200\text{Vdc}$ Note 7	---	---	---	---
---	---	Early Life Assurance Test End Points	Shorts and Continuity	---	---	---	---
			Change in Plate Current (2) of Individual tubes	$\Delta \frac{I_b}{t}$	---	20	%

<u>Reference</u>	<u>AQL</u>	<u>Test</u>	<u>Conditions</u>	<u>Sym.</u>	<u>Min.</u>	<u>Max.</u>	<u>Unit</u>
4. 11. 5	---	Intermittent Life Test (1) 1000 Hours	Early Life, Assurance Test Conditions, Note 8	---	---	---	---
4. 11. 4	---	Intermittent Life Test (1) End Points 1000 Hours	Inoperatives  Grid Current (1)  Change in Plate Current (2) of Individual Tubes	---	---	---	---
				$I_c(1)$	0	-1.0	$\mu\text{Adc}$
				$\Delta \frac{I_b}{t}$	---	30	%
			Heater Cathode Leakage Ehk = +200 Vdc Ehk = -200 Vdc	Ihk Ihk	---	20	$\mu\text{Adc}$ $\mu\text{Adc}$
			Insulation of Electrodes E(g-all) E(p-all)	Rg-all Rp-all	1000	---	meg meg
4. 11. 5	---	Intermittent Life Test (2) 1000 Hours	Ef=6. 3V or 12. 6V Eb=250Vdc, Ec= -25Vdc Note 9	---	---	---	---
4. 11. 4	---	Intermittent Life Test (2) End Points 1000 Hours	Interface Resistance Note 10	Ri	---	100	ohms
4. 11. 7	---	Heater Cycling Life Test	Ef=7. 0V or 13. 8V Ehk= -200Vdc Cycle 1. 0 min. on 4. 0 min. off	---	---	48	hours
4. 11. 4	---	Heater Cycling Life Test End Points	Shorts and Continuity  Heater Cathode Leakage Ehk= +200 Vdc Ehk= -200 Vdc	---	---	---	---
				Ihk Ihk	---	15	$\mu\text{Adc}$ $\mu\text{Adc}$

#### TEST NOTES

Note 1: Lots of CBS Electronics tubes may be sampled using MIL-STD-105A sampling tables for the specified AQL. All characteristics having similar AQL's shall be combined for sampling purposes with the exception of control test. Control tests are indicated by an asterisk (\*). The term AQL, as used on the specification, is defined in MIL-STD-105A, paragraph 4. 1.


Note 2: References are paragraphs in MIL-E-1D specification, dated 31 March 1958.

Note 3: Test each section separately. The section not under test shall be grounded.

Note 4: Connect both sections in parallel.

Note 5: Use pulse of ten microsecond duration, egk = +50V, at a 1% duty cycle. Read with scope across a 1.0 ohm cathode resistor.

Note 6: The grid blocking test shall be performed using circuit shown below or equivalent.

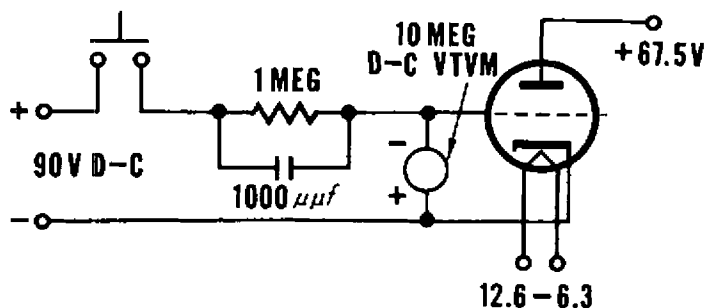

Note 7: Early Life Assurance Test

- a. Life test samples shall be selected from a lot at random in such a manner as to be representative of the lot. If such selection results in a sample containing tubes which are outside the initial specification limits for the relevant life test endpoint characteristics, such tubes shall be replaced by randomly selected acceptable tubes.
- b. Serially mark all tubes of the sample.
- c. Record reference characteristic measurements on the entire sample after a maximum operation of 15 minutes under specified voltage and current conditions.
- d. The Early Life Assurance Test sample shall be operated at specified conditions or equivalent for 100 hours ( $\pm 4$  hours) with the intermediate down period reading point at 20 hours ( $\pm 4$  hours) and 2 hours ( $\pm 30$  minutes). Intermittent or continuous operation may be employed.
- e. A defective shall be defined as a tube having failed the shorts and continuity test or a tube having a change in referenced characteristic greater than that specified.

Note 8: 1000 Hour Intermittent Life Test

- a. The sample size shall be 10 tubes and shall be selected from the first 10 lowest number tubes which have successfully passed the Early Life Assurance Test and meet the initial test end point characteristic.
- b. Record the reference characteristic.
- c. Place the sample on life test with the specified operating conditions for 1000 hours with the intermediate down period reading points at  $250 \pm 24$  hours,  $500 \pm 24$  hours and  $750 \pm 24$  hours. The 100 hours of Early Life Assurance Test shall be part of the 1000 hours.
- d. Acceptance criteria - The sample is acceptable if it has earned a total of 9000 tube hours. The total number of tube hours is the sum of the successful operating hours of each tube.
- e. Quarterly, the life test sample shall be continued to 5000 hours with interim reading points at each 1000 hours. This test will be run to determine long life capabilities.

Note 9: Intermittent Life Test (2)

- a. Life test samples shall be selected from a lot at random in such a manner as to be representative of the lot. If such selection results in a sample containing tubes which are outside the initial specification limits for the relevant life test end point characteristics, such tubes shall be replaced by randomly selected acceptable tubes.
- b. Sample size shall be 10 tubes.
- c. Record the reference characteristics.
- d. Place the sample on life test with the specified operating conditions for 1000 hours with the intermediate down period reading points at  $250 \pm 24$  hours,  $500 \pm 24$  hours and  $750 \pm 24$  hours.
- e. Acceptance criteria - The sample is acceptable if it has earned a total of 9000 tube hours. The total number of tube hours is the sum of the successful operating hours of each tube.

Note 10: Interface Resistance shall be measured using the equivalent diode resistance 2 frequency method.

Note 11: Use 10 megohm input resistance DC VTVM. Read voltage developed across  $R_g$ .

Note 12: Difference in Plate Current ( $I_{b(2)}$ ) between each section.

Note 13: The rejection level shall be set at the VU meter reading obtained during calibration.



*More reliable products through Advanced-Engineering*

**CBS ELECTRONICS**, Receiving tube Operations, Danvers, Mass. A Division of Columbia Broadcasting System, Inc.

*Sales Offices:* Danvers, Mass., 100 Endicott Street, SPring 4-2360 • Newark, N. J., 231 Johnson Ave., TAibert 4-2450  
Melrose Park, Ill., 1990 N. Mannheim Road, ESTebrook 9-2100 • Atlanta, Georgia, Cary Chapman and Co., 672 Whitehall St., SW., JAckson 4-7388  
Minneapolis, Minn., The Heimann Co., 1711 Hawthorne Avenue, FEederal 2-5457 • Los Angeles, Calif., 2120 S. Garfield Avenue, RAYmond 3-9081