

Gas Phototube

SIDE-ON TYPE HAVING S-I RESPONSE


DATA

General:

Spectral Response	S-1
Wavelength of Maximum Response.	8000 $\pm$ 1000 angstroms
Cathode:	
Shape	Semicylindrical
Minimum projected length ^a	13/16"
Minimum projected width ^a	5/8"
Direct Interelectrode Capacitance (Approx.)	2.4 μ f
Maximum Overall Length.	3-1/16"
Maximum Seated Length	2-1/2"
Seated Length to Center of Cathode.	1-5/8" $\pm$ 3/32"
Maximum Diameter.	1-9/32"
Operating Position.	Any
Weight (Approx.)	0.9 oz
Bulb.	T9
Socket.	Cinch No. 8JM-1, or equivalent $\leftarrow$
Base.	Intermediate-Shell Octal 5-Pin Arrangement 1, (JEDEC No. B5-10)
Basing Designation for BOTTOM VIEW.	3J

DIRECTION OF RADIATION

Pin 1 - No Connection
Pin 2 - No Connection
Pin 4 - Anode



Pin 6 - No Connection
Pin 8 - Photocathode

Maximum Ratings, Absolute-Maximum Values:

	Rating I	Rating II	
ANODE-SUPPLY VOLTAGE (DC or Peak AC)	70 max.	90 max.	volts
AVERAGE CATHODE-CURRENT DENSITY ^b	60 max.	30 max.	μ a/sq. in.
AVERAGE CATHODE CURRENT ^b	6 max.	3 max.	μ a
AMBIENT TEMPERATURE	100 max.	100 max.	$^{\circ}$ C

Characteristics:

*With an anode-supply voltage of 90
volts unless otherwise specified*

Min. Median Max.

Sensitivity:

Radiant, at 8000
angstroms

- 0.013 - amp/watt $\leftarrow$

$\leftarrow$ Indicates a change.



Min. Median Max.

Luminous: ^c				
At 0 cps.	90	135	205	μ a/lumen
At 5000 cps	—	111	—	μ a/lumen
At 10000 cps.	—	101	—	μ a/lumen
Gas Amplification Factor ^d . . .	—	—	10	
Anode Dark Current at 25° C . .	—	—	0.1	μ a

Minimum Circuit Values:

With an anode-supply voltage of 70 or less 90 volts

DC Load Resistance:

For dc currents above 3 μ a. .	0.1 min.	—	megohm
For dc currents below 3 μ a. .	0 min.	—	megohms
For dc currents above 2 μ a. .	—	2.5 min.	megohms
For dc currents below 2 μ a. .	—	1 min.	megohm

^a On plane perpendicular to indicated direction of incident radiation.

^b Averaged over any interval of 30 seconds maximum.

^c For conditions where the light source is a tungsten-filament lamp operated at a color temperature of 2870° K. A dc anode supply voltage of 90 volts and a 1-megohm load resistor are used. For the 0-cycle measurement, a light input of 0.1 lumen is used. For the 5000- and 10,000-cycle measurements, the light input is varied sinusoidally about a mean value of 0.015 lumen from zero to a maximum of twice the mean value.

^d The ratio of luminous sensitivity at an anode supply voltage of 90 volts to luminous sensitivity at an anode supply voltage of 25 volts. In each case, sensitivity is obtained under conditions where the light source is a tungsten-filament lamp operated at a color temperature of 2870° K, the light input is 0.1 lumen, and the load resistor has a value of 1 megohm.

**SPECTRAL-SENSITIVITY CHARACTERISTIC
OF PHOTOSENSITIVE DEVICE HAVING S-I RESPONSE**

and


**FREQUENCY-RESPONSE CHARACTERISTICS
OF GAS PHOTOTUBES**

are shown at the front of this section

DIMENSIONAL OUTLINE
shown under Type 5581 also applies to the 930

AVERAGE ANODE CHARACTERISTICS

LIGHT SOURCE IS A TUNGSTEN-FILAMENT
LAMP OPERATED AT COLOR TEMPERATURE
OF 2870° K.

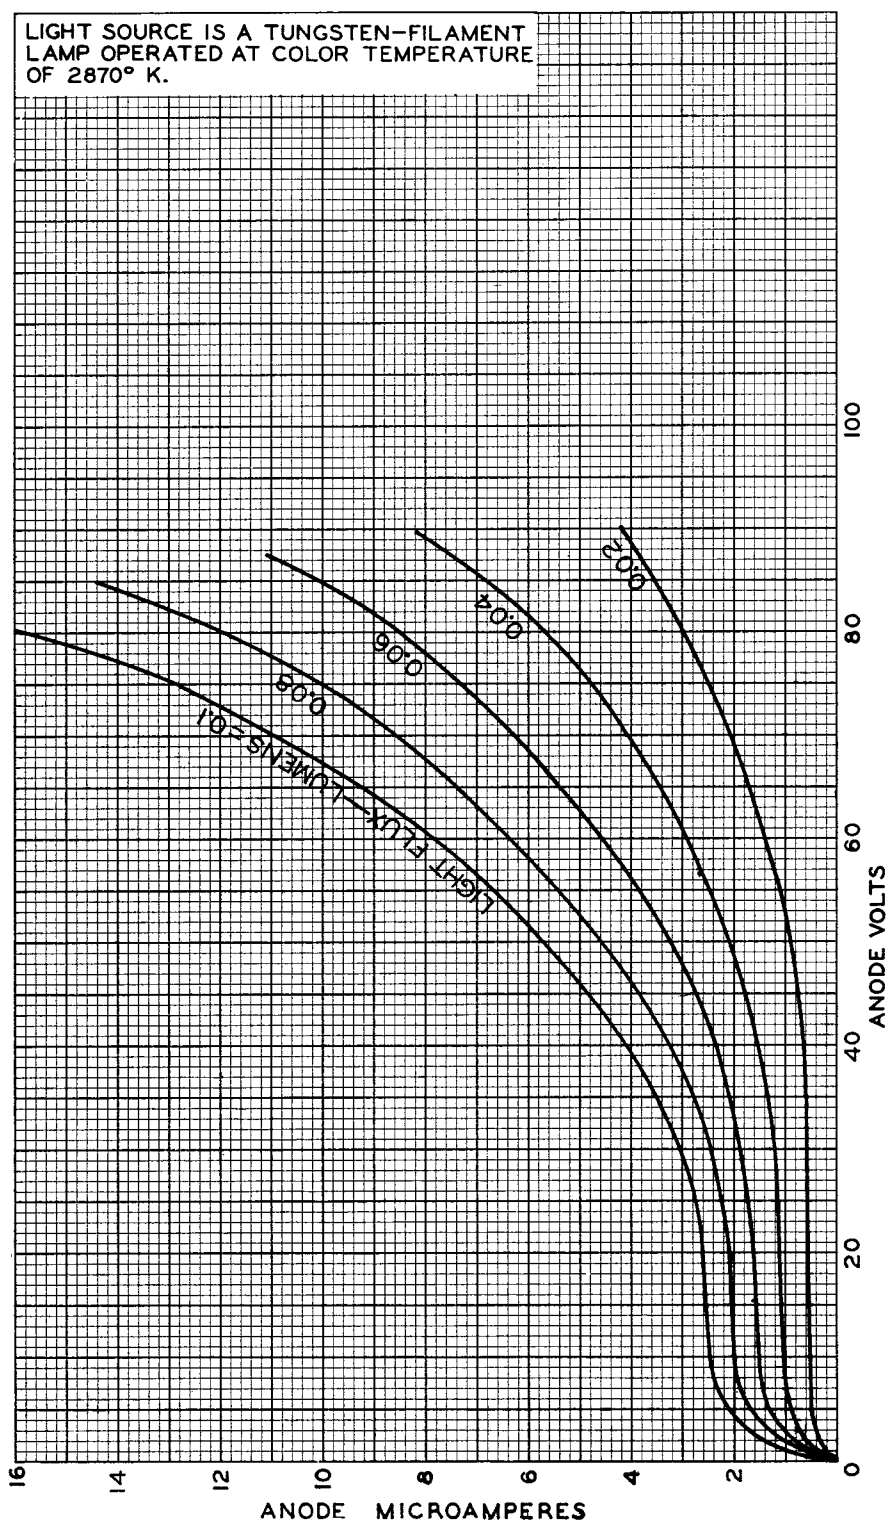

92CM-4806R2

