

Multiplier Phototube

S-11 RESPONSE

"RUGGEDIZED", 10-STAGE, HEAD-ON, ELECTROSTATICALLY FOCUSED
FLAT-FACEPLATE TYPE DYNODE STAGES


For Detection and Measurement of Nuclear Radiation and Other Low-Level Light Sources in Industrial, Military, and Missile Applications

DATA

General:

Spectral Response	S-11
Wavelength of Maximum Response.	4400 $\pm$ 500 angstroms
Cathode, Semitransparent.	Cesium-Antimony
Shape	Flat, Circular
Minimum area.	1.2 sq. in.
Minimum diameter.	1.24"
Window.	Lime Glass (Corning ^a No.0080), or equivalent
Index of refraction	1.51
Dynode Material	Cesium-Antimony
Direct Interelectrode Capacitances (Approx.):	
Anode to dynode No.10	4 pf
Anode to all other electrodes	7 pf
Maximum Overall Length (Excluding flexible leads)	3.91"
Maximum Diameter.	1.56"
Operating Position.	Any
Weight (Approx.).	2 oz
Bulb.	T12
Magnetic Shield	b
Base.	Special
Terminal Diagram:	BOTTOM VIEW

Lead 1 - Dynode No.1
Lead 2 - Dynode No.3
Lead 3 - Dynode No.5
Lead 4 - Dynode No.7
Lead 5 - Dynode No.9
Lead 6 - Anode
Lead 7 - Dynode No.10
Lead 8 - Dynode No.8
Lead 9 - Dynode No.6
Lead 10 - Dynode No.4
Lead 11 - Dynode No.2
Lead 13 - Photocathode



DIRECTION OF RADIATION:
INTO END OF BULB

Maximum Ratings, Absolute-Maximum Values:

DC SUPPLY VOLTAGE BETWEEN ANODE CATHODE	1250 max. volts
DC SUPPLY VOLTAGE BETWEEN DYNODE No.10 AND ANODE	250 max. volts
DC SUPPLY VOLTAGE BETWEEN CONSECUTIVE DYNODES	200 max. volts
DC SUPPLY VOLTAGE BETWEEN DYNODE No.1 AND CATHODE	300 max. volts



AVERAGE ANODE CURRENT ^c	0.75 max.	ma
AMBIENT TEMPERATURE	75 max.	°C

Characteristics Range Values for Equipment Design:

Under conditions with dc supply voltage (E) across a voltage divider providing 1/6 of E between cathode and dynode No.1; 1/12 of E for each succeeding dynode stage; and 1/12 of E between dynode No.10 and anode.

With E = 1000 volts (Except as noted)

	Min.	Typ.	Max.	
Sensitivity:				
Radiant, at 4400 angstroms	—	2.2×10^4	—	a/w
Cathode radiant, at 4400 angstroms	—	0.036	—	a/w
Luminous:				
At 0 cps ^d	10	27	300	a/lm
With dynode No.10 as output electrode ^e . . .	—	16	—	a/lm
Cathode luminous:				
With tungsten light source ^f	3×10^{-5}	4.5×10^{-5}	—	a/lm
With blue light source ^{g,m}	2.8×10^{-8}	—	—	a
Current Amplification	—	6×10^5	—	
Equivalent Anode-Dark-Current Input at a luminous sensitivity of 20 a/lm: ^{h,j}	—	8×10^{-10}	2.5×10^{-9}	lm
Equivalent Noise Input ^k	—	4×10^{-12}	1.7×10^{-11}	lm
Dark Current to Any Electrode Except Anode at 25° C . . .	—	—	7.5×10^{-7}	a

With E = 750 volts (Except as noted)

	Min.	Typ.	Max.	
Sensitivity:				
Radiant, at 4400 angstroms	—	2.2×10^3	—	a/w
Cathode radiant, at 4400 angstroms	—	0.036	—	a/w
Luminous:				
At 0 cps ^d	—	2.7	—	a/lm
With dynode No.10 as output electrode ^e . . .	—	1.6	—	a/lm

	Min.	Typ.	Max.	
Cathode Luminous:				
With tungsten				
light source ^f . .	3×10^{-5}	4.5×10^{-5}	—	a/lm
With blue				
light source ^{g,m} .	2.8×10^{-8}	—	—	a
Current Amplification	—	6×10^4	—	

^a Made by Corning Glass Works, Corning, New York.

^b Magnetic shielding material in the form of foil or tape as available from The Magnetic Shield Division, Perfection Mica Company, 1829 Civic Opera Building, 20 North Wacker Drive, Chicago 6, Illinois, or equivalent.

^c Averaged over any interval of 30 seconds maximum.

^d Under the following conditions: The light source is a tungsten-filament lamp having a lime-glass envelope. It is operated at a color temperature of 2870° K and a light input of 10 microlumens is used.

^e An output current of opposite polarity to that obtained at the anode may be provided by using dynode No. 10 as the output electrode. With this arrangement, the load is connected in the dynode-No. 10 circuit and the anode serves only as collector. The curves shown in the accompanying *Typical Anode Characteristics* curve, do not apply when dynode No. 10 is used as the output electrode.

^f Under the following conditions: The light source is a tungsten-filament lamp having a lime-glass envelope. It is operated at a color temperature of 2870° K. The value of light flux is 0.01 lumen and 200 volts are applied between cathode and all other electrodes connected as anode.

^g Under the following conditions: Light incident on the cathode is transmitted through a blue filter (Corning C.S. No. 5-58, Glass Code No. 5113 polished to 1/2 stock thickness—Manufactured by the Corning Glass Works, Corning, New York) from a tungsten-filament lamp operated at a color temperature of 2870° K. The value of light flux incident on the filter is 0.01 lumen and 200 volts are applied between cathode and all other electrodes connected as anode.

^h At a tube temperature of 25° C. Dark current may be reduced by use of a refrigerant.


^j For maximum signal-to-noise ratio, operation with a supply voltage (E) below 1000 volts is recommended.

^k Under the following conditions: Supply voltage (E) is as shown, 25° C tube temperature, external shield connected to cathode, bandwidth 1 cycle per second, tungsten-light source at a color temperature of 2870° K interrupted at a low audio frequency to produce incident radiation pulses alternating between zero and the value stated. The "on" period of the pulse is equal to the "off" period.

^m See *Spectral Characteristic of 2870° K Light Source and Spectral Characteristic of Light from 2870° K Source after passing through Indicated Blue Filter* at front of this Section.

**SPECTRAL-SENSITIVITY CHARACTERISTIC
OF PHOTSENSITIVE DEVICE HAVING S-II RESPONSE
is shown at the front of this Section**



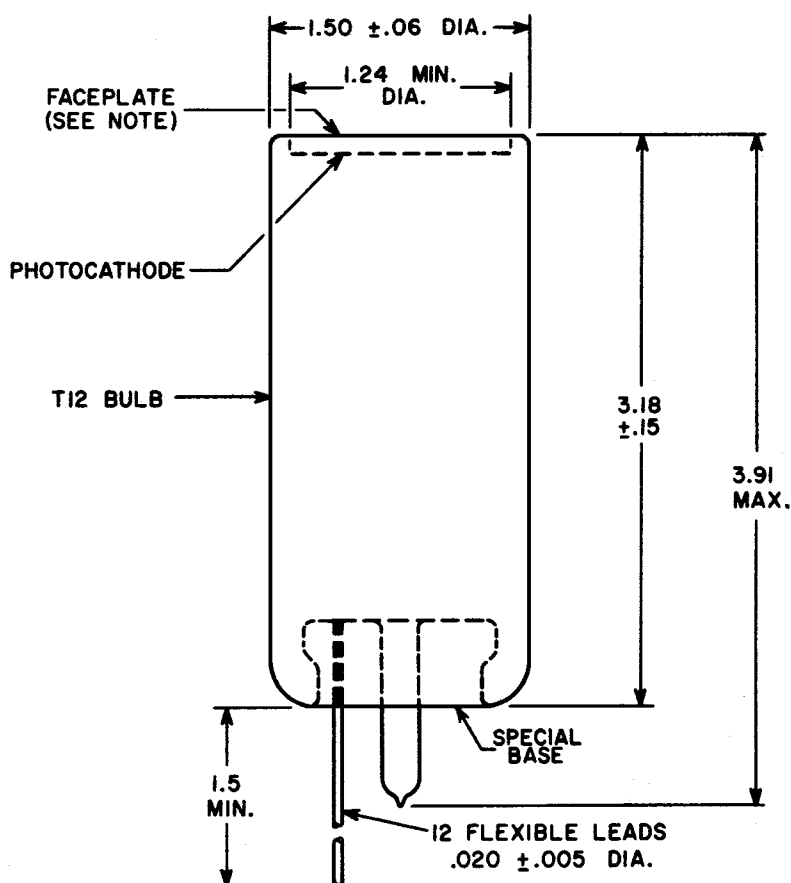


92CS-11432R1

DIMENSIONS IN INCHES

NOTE: WITHIN 1.24 INCH DIAMETER, DEVIATION FROM FLATNESS OF EXTERNAL SURFACE OF FACEPLATE WILL NOT EXCEED 0.010 INCH FROM PEAK TO VALLEY.

SPECIAL BASE

Pin Dimensions and Orientation and Index Guide

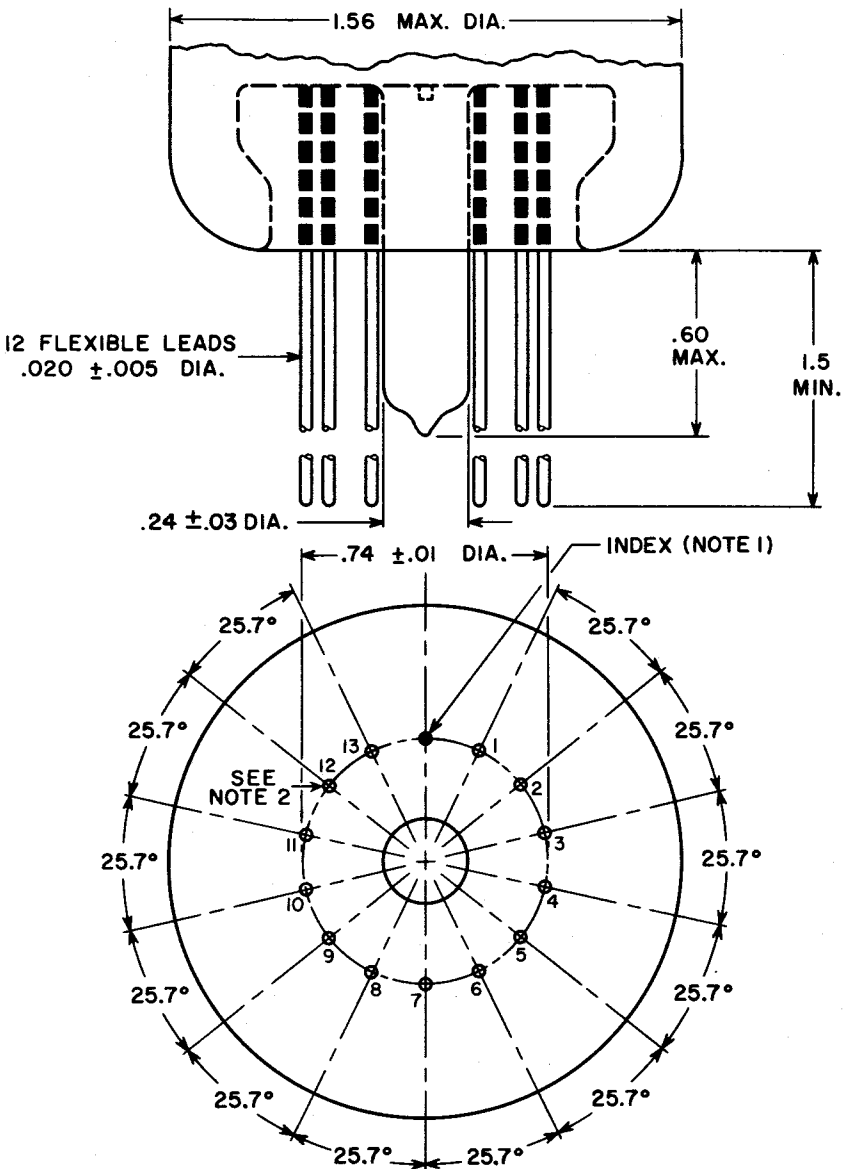

92CM-11429R1

DIMENSIONS IN INCHES

12-Lead Base 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 13


NOTE 1: LEAD IS CUT OFF WITHIN 0.04 INCH OF THE GLASS BUTTON FOR INDEXING.

NOTE 2: LEAD No. 12 IS CUT OFF WITHIN 0.04 INCH OF THE GLASS BUTTON.




TYPICAL ANODE CHARACTERISTICS

DYNODE-No.1-TO-CATHODE VOLTS=167
 EACH SUCCEEDING STAGE VOLTS=83
 LIGHT SOURCE IS A TUNGSTEN-FILAMENT
 LAMP OPERATED AT COLOR TEMPERATURE
 OF 2870° K.

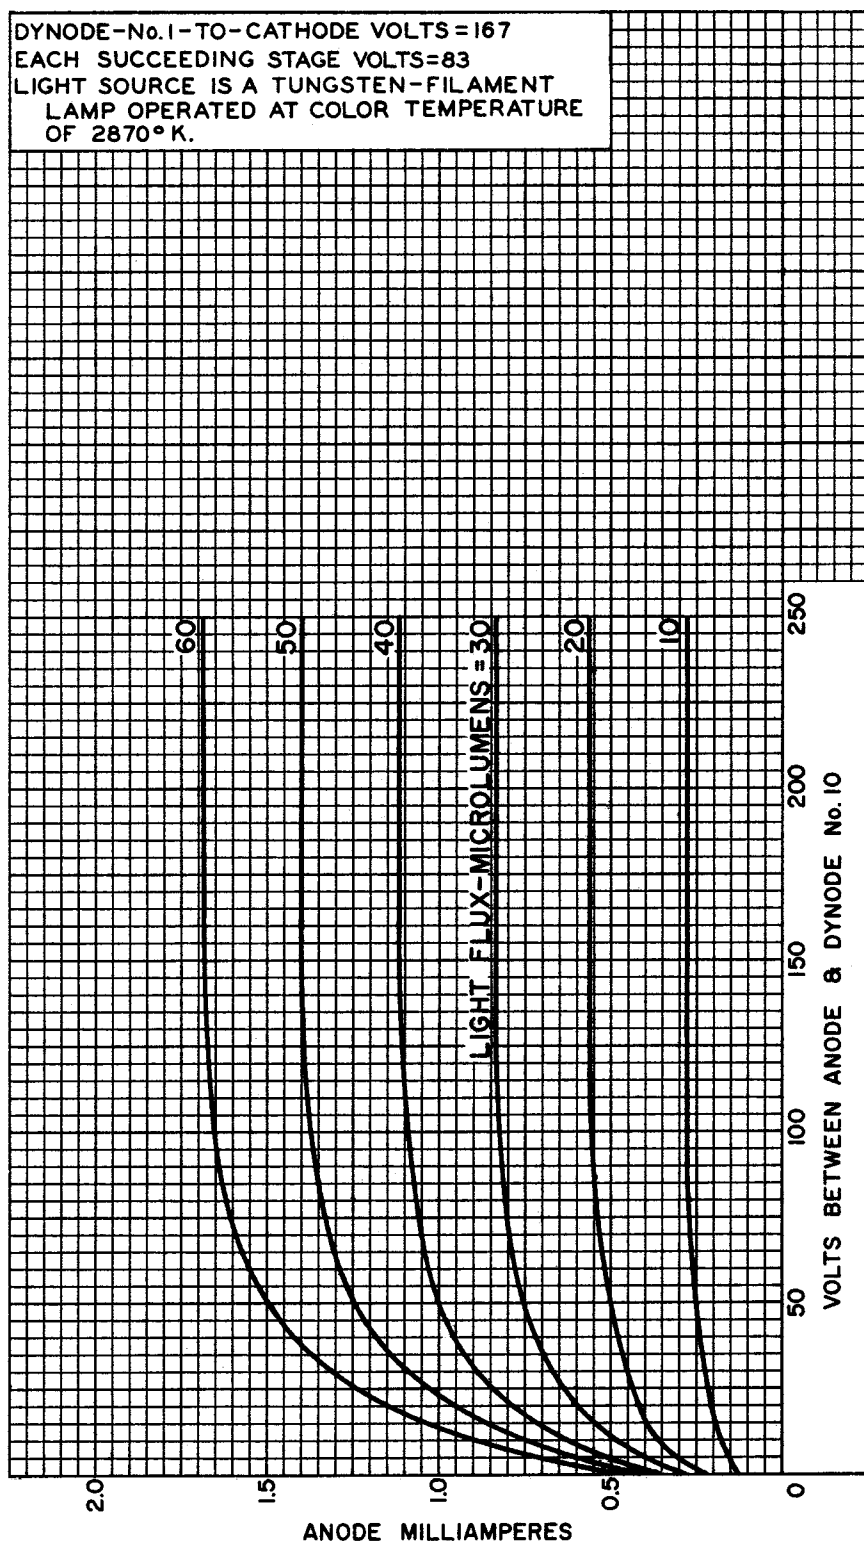

92CM-7255R6

TYPICAL CHARACTERISTICS

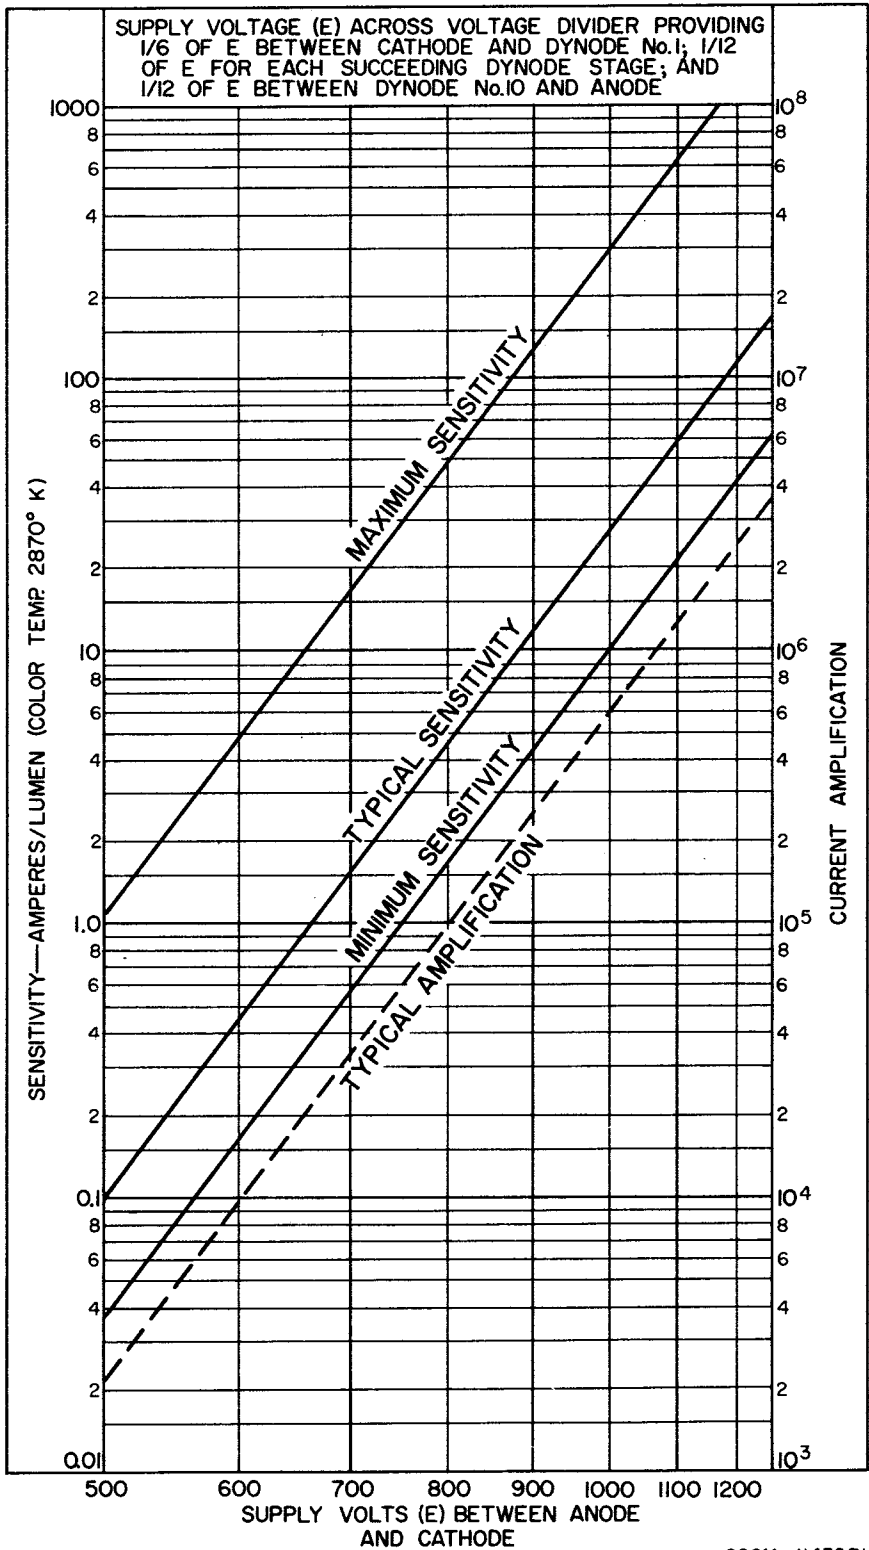

92CM-11439R1



TYPICAL ANODE-DARK-CURRENT CHARACTERISTIC

