

Vacuum Phototube


SIDE-ON TYPE HAVING S-4 RESPONSE

DATA

General:

Spectral Response	S-4
Wavelength of Maximum Response	4000 $\pm$ 500 angstroms
Cathode:	
Shape	Semicylindrical
Minimum projected length ^a	13/16"
Minimum projected width ^a	5/8"
Direct Interelectrode Capacitance (Approx.)	2.6 μ f
Maximum Overall Length	3-1/16"
Maximum Seated Length	2-1/2"
Seated Length to Center of Cathode	1-5/8" $\pm$ 3/32"
Maximum Diameter	1-9/32"
Operating Position	Any
Weight (Approx.)	0.9 oz $\leftarrow$
Bulb	T9
Socket	Cinch No.8JM-1, or equivalent $\leftarrow$
Base	Intermediate-Shell Octal 5-Pin, Arrangement 1 (JEDEC Group 1, No.B5-10)
Basing Designation for BOTTOM VIEW	.3J

DIRECTION OF LIGHT

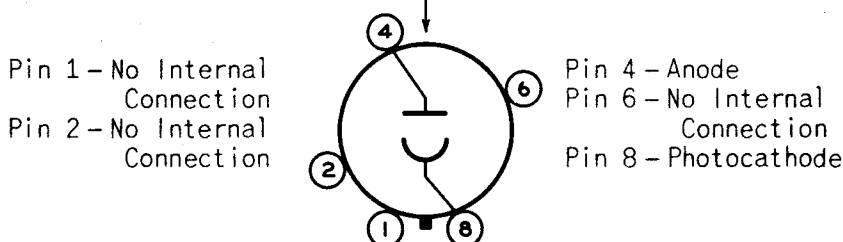

Maximum Ratings, Absolute-Maximum Values:

ANODE-SUPPLY VOLTAGE (DC or Peak AC)	250 max.	volts
AVERAGE CATHODE-CURRENT DENSITY ^b	25 max.	μ a/sq. in.
AVERAGE CATHODE CURRENT ^b	5 max.	μ a
AMBIENT TEMPERATURE	75 max.	$^{\circ}$ C

Characteristics:

With an anode-supply voltage of 250 volts

Min. Median ~~Max.~~

Sensitivity:

Radiant, at 4000 angstroms.	-	0.044	-	amp/watt
Luminous ^c	20	45	100	μ a/lumen
Anode Dark Current at 25 $^{\circ}$ C	-	-	0.25	μ a

$\leftarrow$ indicates a change.



- a** On plane perpendicular to indicated direction of incident light.
- b** Averaged over any interval of 30 seconds maximum.
- c** For conditions where the light source is a tungsten-filament lamp operated at a color temperature of 2870° K. A 1-megohm load resistor and a light input of 0.1 lumen are used.

**SPECTRAL-SENSITIVITY CHARACTERISTIC
OF PHOTOSENSITIVE DEVICE HAVING S-4 RESPONSE**
is shown at front of this section

DIMENSIONAL OUTLINE
shown under Type 5581 also applies to the 5653

AVERAGE-ANODE-CHARACTERISTICS CURVE
shown under Type 929 also applies to the 5653