



5769

5769

IMAGE ORTHICON

MAGNETIC FOCUS

MAGNETIC DEFLECTION

DATA

General:

Heater, for Unipotential Cathode:

Voltage. 6.3 $\pm$ 10% ac or dc volts

Current. 0.6 amp

Direct Interelectrode Capacitance:

Anode to All Other Electrodes 20 μ f

Photocathode Spectral Response See Curve

Image Size (3 x 4 aspect ratio). 1.6" Diagonal

Focusing Method. Magnetic

Deflection Method. Magnetic

Overall Length 15-1/4" $\pm$ 1/4"Greatest Diameter of Bulb. 3" $\pm$ 1/16"

Minimum Deflecting-Coil Inside Diameter. 2-1/8"

Deflecting-Coil Length 5"

Focusing-Coil Length 10"


Alignment-Coil Length. 15/16"

Photocathode Distance Inside End of Focusing Coil. . . 1/2"

Operating Position Any except with diheptal base
up and tube axis at angle of
less than 20° from the vertical

End Base Small-Shell Diheptal 14-Pin

BOTTOM VIEW

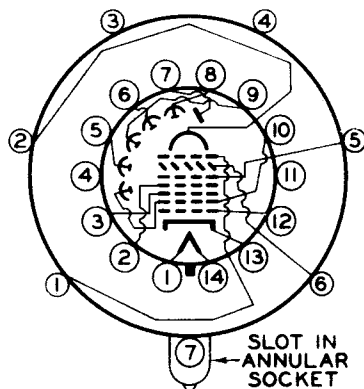DIRECTION OF LIGHT:
PERPENDICULAR TO
LARGE END OF TUBEWHITE INDEX LINE
ON FACE

Pin 1-Heater
Pin 2-Grid No.4
Pin 3-Grid No.3
Pin 4-Internal Connec-
tion—Do Not Use

Pin 5-Dynode No.2
Pin 6-Dynode No.4
Pin 7-Anode
Pin 8-Dynode No.5
Pin 9-Dynode No.3
Pin 10-Dynode No.1,
Grid No.2

Pin 11-Internal Connec-
tion—Do Not Use

Pin 12-Grid No.1

Pin 13-Cathode

Pin 14-Heater

Shoulder Base. Keyed Jumbo Annular 7-Pin

Pin 1-Grid No.6
Pin 2-Photocathode
Pin 3-Internal Connec-
tion—Do Not Use

Pin 4-Internal Connec-
tion—Do Not Use

Pin 5-Grid No.5
Pin 6-Target
Pin 7-Internal Connec-
tion—Do Not Use



IMAGE ORTHICON

Maximum Ratings, Absolute Values:

PHOTOCATHODE VOLTAGE	-550 max.	volts
PHOTOCATHODE ILLUMINATION	50 max.	ft-c
OPERATING TEMPERATURE OF ANY PART OF BULB	65 max.	°C
OPERATING TEMPERATURE OF BULB AT LARGE END OF TUBE (Target Section)	35 min.	°C
TEMPERATURE DIFFERENCE BETWEEN TARGET SECTION AND ANY PART OF BULB HOTTER THAN TARGET SECTION	5 max.	°C
GRID-No.6 VOLTAGE	-550 max.	volts
TARGET VOLTAGE:		
Positive value	50 max.	volts
Negative value	50 max.	volts
GRID-No.5 VOLTAGE	150 max.	volts
GRID-No.4 VOLTAGE	300 max.	volts
GRID-No.3 VOLTAGE	400 max.	volts
GRID-No.2 & DYNODE-No.1 VOLTAGE	350 max.	volts
GRID-No.1 VOLTAGE:		
Negative bias value	125 max.	volts
Positive bias value	0 max.	volts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode	125 max.	volts
Heater positive with respect to cathode	10 max.	volts
ANODE-SUPPLY VOLTAGE*	1650 max.	volts
VOLTAGE PER MULTIPLIER STAGE	350 max.	volts

Typical Operation:

Photocathode Voltage (Image Focus)	-300 to -500	volts
Grid-No.6 Voltage (Accelerator)— 80% of photocathode voltage	-240 to -400	volts
Target Voltage*	0	volts
Grid-No.5 Voltage (Decelerator)**	0 to 100	volts
Grid-No.4 Voltage (Beam Focus)	160 to 240	volts
Grid-No.3 Voltage##	225 to 330	volts
Grid-No.2 & Dynode-No.1 Voltage	300	volts
Grid-No.1 Voltage (For Picture Cutoff)	-45 to -115	volts
Dynode-No.2 Voltage	600	volts
Dynode-No.3 Voltage	880	volts
Dynode-No.4 Voltage	1160	volts
Dynode-No.5 Voltage	1450	volts
Anode Voltage	1500	volts
Anode Current	50	μa
Target Temperature Range	35 to 60	°C
Highlight Illumination on Photocathode for Maximum Signal Output:		
With 2870°K Tungsten Illumination	0.15	ft-c
With White Fluorescent Illumination or Daylight	0.07	ft-c
Ratio of Peak-to-Peak Highlight Video- Signal Cur. to RMS Noise Current (Approx.)	35	

* , • , •• , ## : See next page.



5769

5769

IMAGE ORTHICON

Minimum Peak-to-Peak Blanking Voltage. . . .	10	volts
Field Strength at Center of Focusing Coil. .	75	gausses
Focusing-Coil Current (Approx. for coil coil listed below).	75	ma
Deflecting-Coil Current (Approx. for assembly listed below):		
Horizontal (Peak to Peak).	625	ma
Vertical (Peak to Peak).	290	ma
Alignment-Coil Current (Approx. for coil listed below)	0 to 30	ma

Components:

Deflecting-Coil Assembly (Includes Keyed Jumbo Annular 7-Pin Socket). . .	RCA Type No. 201D75
Focusing-Coil Assembly	RCA Type No. 202D75
Alignment-Coil Assembly.	RCA Type No. 204D75
Hor. Deflection Output Transformer . . .	RCA Type No. 204T1
Ver. Deflection Output Transformer . . .	RCA Type No. 204T2

- ⊕ Ratio of dynode voltages is shown under Typical Operation.
- Adjustable from -3 to +5 volts with blanking voltage off.
- Taps at 0, 30, 60, and 90 volts are recommended. Set at voltage giving most uniform resolution and signal output over entire picture area.
- Adjust to give the most uniformly shaded picture near maximum signal.

OPERATING NOTES

After the 5769 has been inserted in its sockets and the voltages applied, allow it to warm up for 1/2 to 1 hour with the camera lens iris closed. Then, proceed with normal operating adjustments.

When the equipment design or operating conditions are such that the maximum temperature rating or maximum temperature difference will be exceeded, provision should be made to direct a blast of cooling air from the diheptal-base end of the tube along the entire length of the bulb surface, i.e., through the space between the bulb surface and the surrounding deflecting coil and its extension. For this purpose, a small blower is satisfactory, but it should run at low speed to prevent vibration of the 5769 and the associated amplifier equipment. Unless vibration is prevented, distortion of the picture may occur. To keep the operating temperature of the large end of the tube from falling below 35°C, some form of controlled heating should be employed. Ordinarily, adequate heat will be supplied by the focusing coil, deflecting coils, and associated amplifier tubes so that the temperature can be controlled by the amount of cooling air directed along the bulb surface.

Resolution of better than 400 lines at the center of the picture can be produced by the 5769 when the highlight illumination is above the knee of the typical signal-output curve for this type. To utilize such resolution capability in the horizontal direction with the standard scanning rate of 525 lines, it is necessary to use a video amplifier having a bandwidth of at least 5.5 megacycles. The maximum resolution obtainable is limited by the mesh-screen portion of the target.

OUTLINE DIMENSIONS for the 5769 are the same
as those shown for Type 5655


5769



5769

CHARACTERISTICS CURVES

TYPICAL SIGNAL OUTPUT

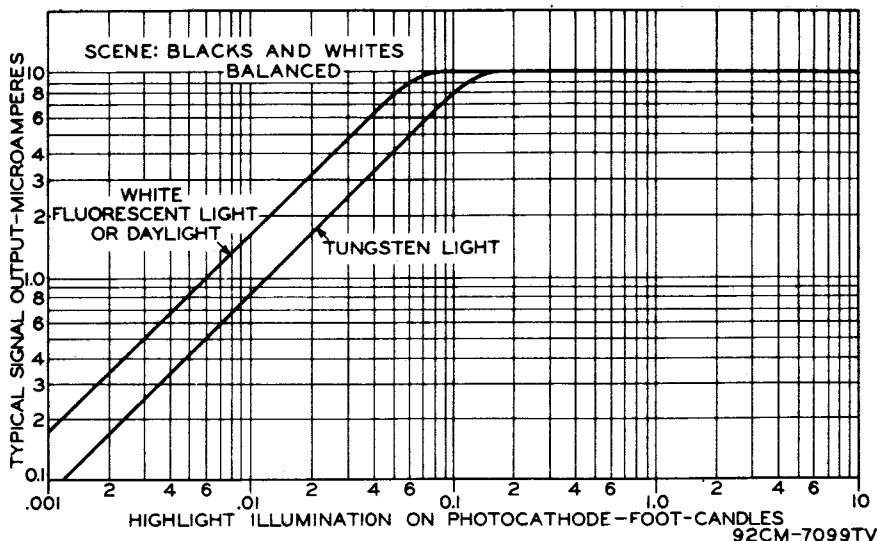

SPECTRAL SENSITIVITY CHARACTERISTIC FOR EQUAL VALUES OF RADIANT FLUX AT ALL WAVELENGTHS

