



7200

7200

MULTIPLIER PHOTOTUBE

9-STAGE TYPE HAVING S-19 RESPONSE

*For detection and measurement of ultraviolet radiation***DATA****General:**

Spectral Response. S-19

Wavelength of Maximum Response 3300 ± 500 angstroms

Cathode:

Minimum projected length[•]. 0.94"Minimum projected width[•]. 0.31"

Direct Interelectrode Capacitances (Approx.):

Anode to dynode No.9 4.4 μf Anode to all other electrodes. 6 μf

Maximum Overall Length 5.69"

Maximum Seated Length. 5.12"

Length from Base Seat to Center of

Useful Cathode Area. $3.94" \pm 0.09"$

Maximum Diameter 1.31"

Weight (Approx.) 1.8 oz

Operating Position Any

Bulb Fused-Silica Section with Graded Seal

Socket Amphenol Part No.78RS-11T, or equivalent

Base Small-Shell Submagnal 11-Pin (JETEC No.B11-88),

Non-hygroscopic

Basing Designation for BOTTOM VIEW 11K

Pin 1 - Dynode No.1


Pin 2 - Dynode No.2

Pin 3 - Dynode No.3

Pin 4 - Dynode No.4

Pin 5 - Dynode No.5

Pin 6 - Dynode No.6



DIRECTION OF LIGHT

Pin 7 - Dynode No.7

Pin 8 - Dynode No.8

Pin 9 - Dynode No.9

Pin 10 - Anode

Pin 11 - Photo-cathode

Maximum Ratings, Absolute Values:

SUPPLY VOLTAGE BETWEEN ANODE AND CATHODE

(DC or Peak AC). 1250 max. volts

SUPPLY VOLTAGE BETWEEN ANODE AND

DYNODE No.9 (DC or Peak AC). 250 max. volts

AVERAGE ANODE CURRENT* 0.5 max. ma

AMBIENT-TEMPERATURE RANGE. -80 to +75 °C

[•],*: See next page.



7200

MULTIPLIER PHOTOTUBE

Characteristics:

Under conditions with dc supply voltage (E) across a voltage divider providing 1/10 of E between cathode and dynode No.1; 1/10 of E for each succeeding dynode stage; and 1/10 of E between dynode No.9 and anode

With E = 1000 volts dc (except as noted)

	Min.	Median	Max.	
Sensitivity:				
Radiant, at				
3300 angstroms. .	—	65000	—	$\mu\text{a}/\mu\text{W}$
Cathode radiant, at				
3300 angstroms. .	—	0.065	—	$\mu\text{a}/\mu\text{W}$
Luminous:*				
At 0 cps.	15	40	300	amp/lumen
Cathode luminous†	20	40	—	$\mu\text{a}/\text{lumen}$
Current Amplification	—	1000000	—	
Equivalent Anode-Dark-Current Input [▲] . .	—	2×10^{-10}	2×10^{-9}	lumen
Equivalent Noise				
Input:				
Luminous*				
At +25° C	—	7.5×10^{-13}	—	lumen
At -78° C	—	4×10^{-14}	—	lumen
Ultraviolet†				
At +25° C	—	6.6×10^{-16}	—	watt
At -78° C	—	4×10^{-17}	—	watt

● On plane perpendicular to the indicated direction of incident light.

* Averaged over any interval of 30 seconds maximum.

For conditions where the light source is a tungsten-filament lamp operated at a color temperature of 2870° K. A light input of 10 microlumens is used. The load resistor has a value of 0.01 megohm.

● For conditions the same as shown under (#) except that the value of light flux is 0.01 lumen and 100 volts are applied between cathode and all other electrodes connected together as anode.

▲ Supply voltage (E) adjusted to give a luminous sensitivity of 20 amperes per lumen. Dark current caused by thermionic emission and ion feedback may be reduced by the use of a refrigerant.

□ For maximum signal-to-noise ratio, operation with a supply voltage (E) below 1000 volts is recommended.

★ Under the following conditions: Supply voltage (E) is 1000 volts, external shield operated at -1000 volts with respect to anode, 25° C tube temperature, ac-amplifier bandwidth of 1 cycle per second, tungsten light source at color temperature of 2870° K interrupted at a low audio frequency to produce incident radiation pulses alternating between zero and the value stated. The "on" period of the pulse is equal to the "off" period. The output current is measured through a filter which passes only the fundamental frequency of the pulses.

† Determined under the same conditions as shown under (★) except that use is made of monochromatic source having radiation of 2537 angstroms.



7200

7200


MULTIPLIER PHOTOTUBE

OPERATING CONSIDERATIONS

The use of an *average anode current* well below the maximum rated value of 0.5 milliampere is recommended when stability of operation is important.

Electrostatic and/or magnetic shielding of the 7200 may be necessary.

SPECTRAL-SENSITIVITY CHARACTERISTIC
of Phototube having S-19 Response
is shown at the front of this Section

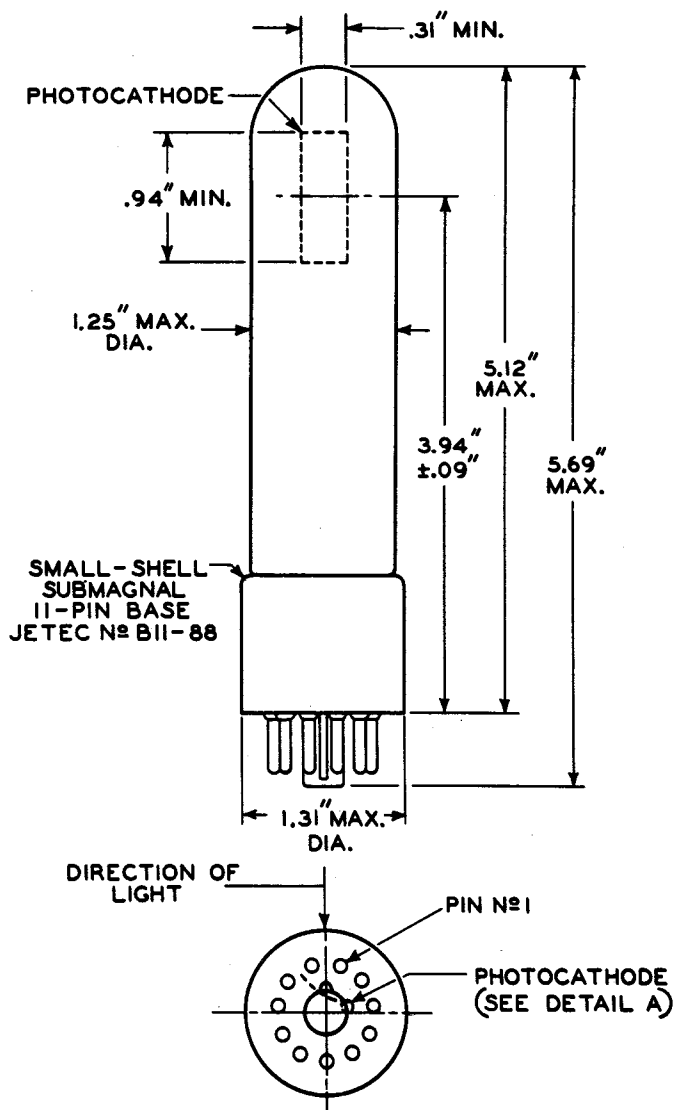

92CS-9581


7200



7200

MULTIPLIER PHOTOTUBE

DETAIL A

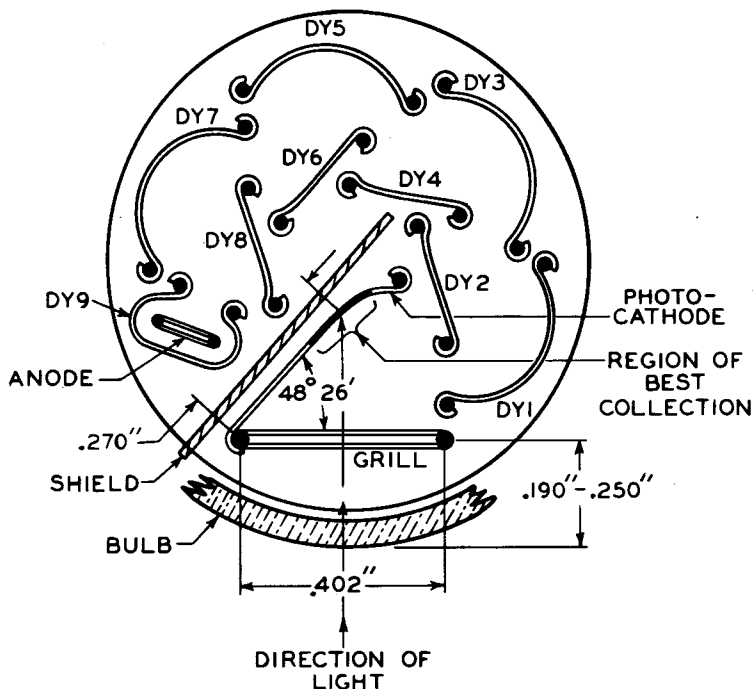

92CS-8674R1

NOTE 1: CENTER LINE OF BULB WILL NOT DEVIATE MORE THAN 2° IN ANY DIRECTION FROM THE PERPENDICULAR ERECTED AT CENTER OF BOTTOM OF BASE.


NOTE 2: THE MAXIMUM ANGULAR VARIATION BETWEEN THE PLANE THROUGH PINS I AND II AND THE PLANE OF THE GRILL WILL NOT EXCEED 6° .



7200

7200

AVERAGE ANODE CHARACTERISTICS

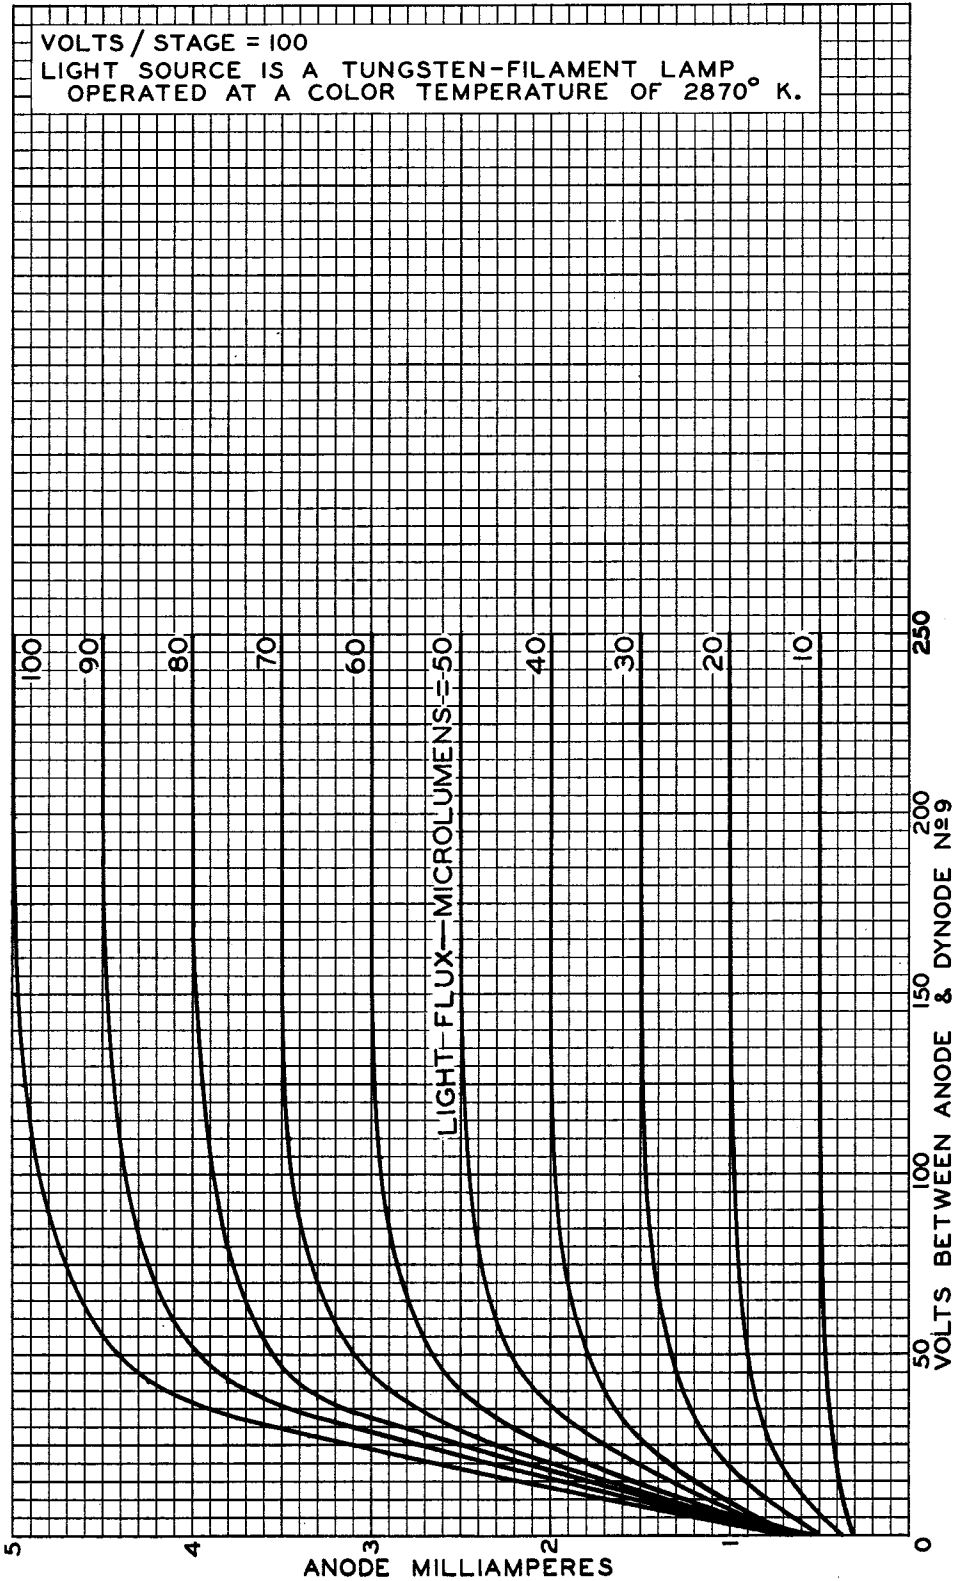

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-9577


7200



7200

CHARACTERISTICS

SUPPLY VOLTAGE (E) ACROSS VOLTAGE DIVIDER PROVIDING $\frac{1}{10}$ OF E BETWEEN CATHODE AND DYNODE № 1; $\frac{1}{10}$ OF E FOR EACH SUCCEEDING DYNODE STAGE; AND $\frac{1}{10}$ OF E BETWEEN DYNODE № 9 AND ANODE

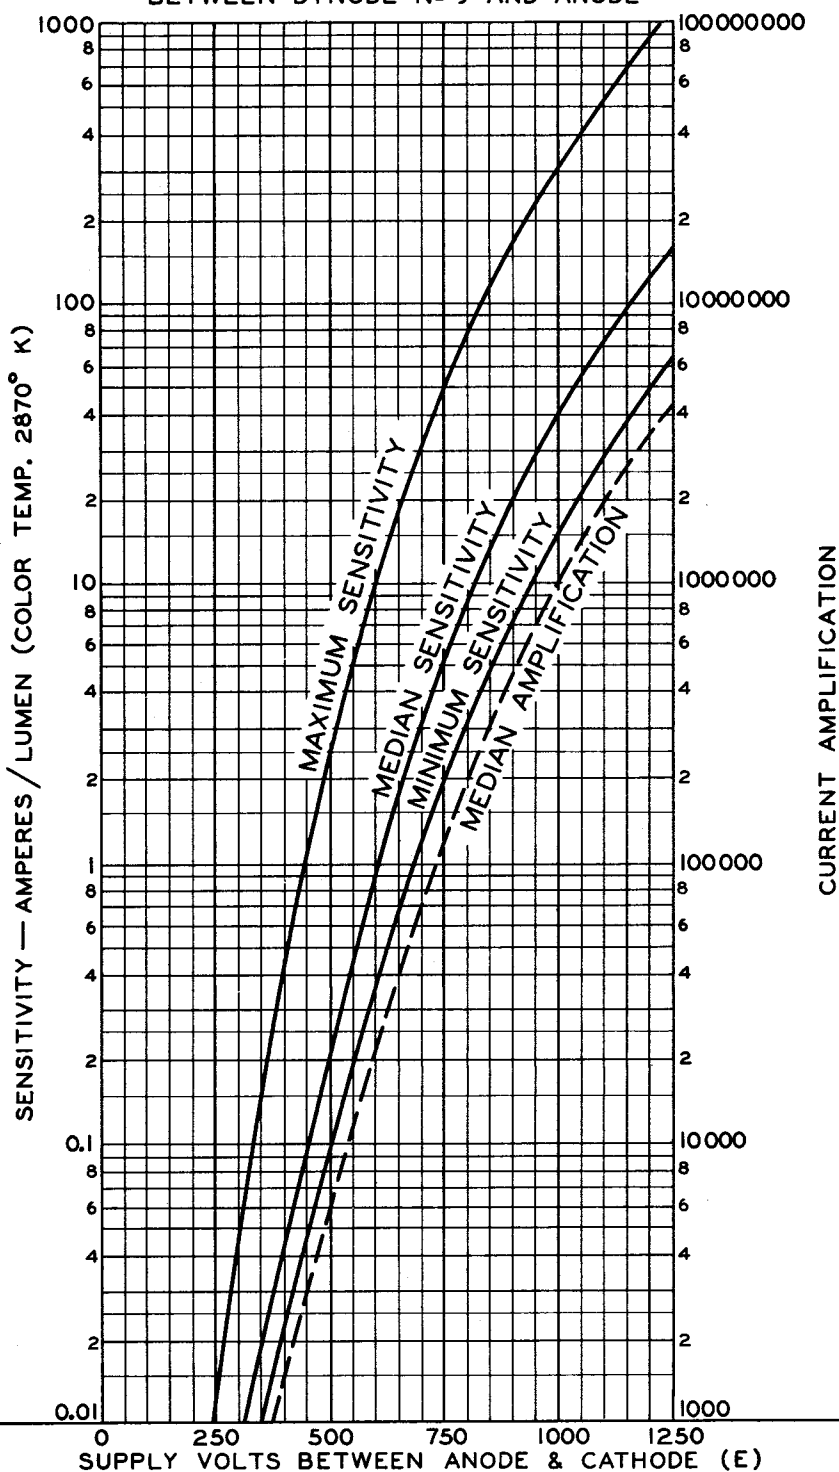

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-9583



7200

7200

TYPICAL ANODE-DARK-CURRENT CHARACTERISTIC

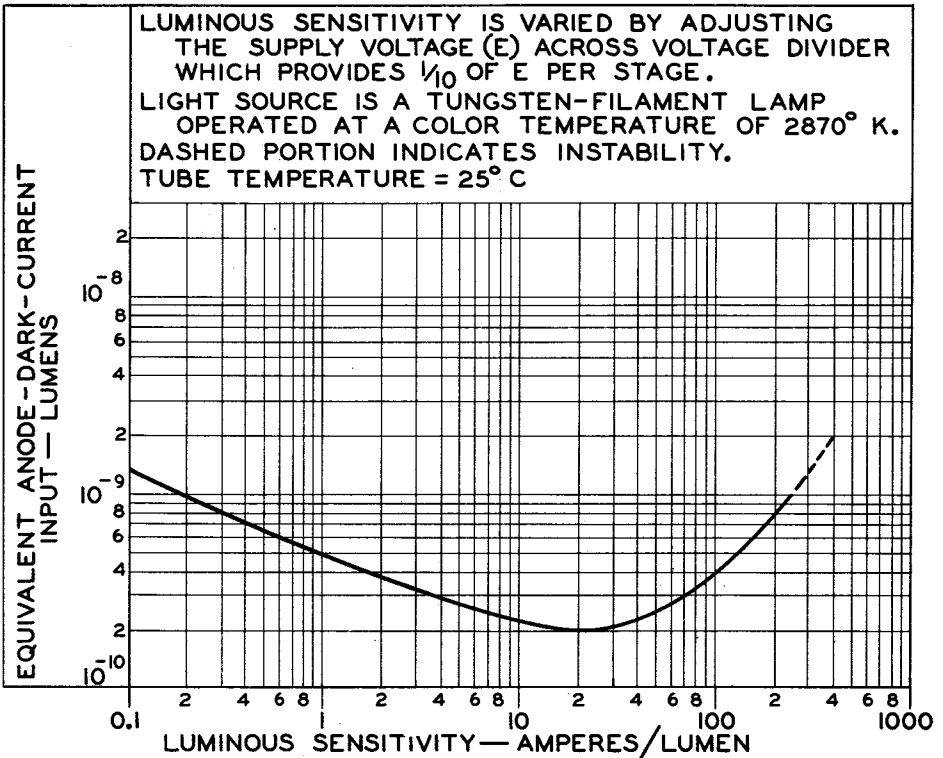

92CS-9586