



991

991



VOLTAGE REGULATOR

Type	Glow Discharge	
Maximum Overall Length		1-9/16"
Maximum Diameter		5/8"
Bulb		T-4-1/2
Base	Bayonet Candelabra, Double Contact	
Operating Conditions:		
Starting-Supply Voltage (D.C.)		87 min. volts
Peak Current *		3 max. ma.
Continuous Current (D.C.) **		2 max. ma.
Operating Voltage Δ		{ 67 max. volts 48 min. volts

* If the 991 is used with a pulsating or alternating supply voltage, the peak current should be limited to 3 ma.

** Sufficient resistance must always be used in series with this tube to limit its d-c current to 2 ma.

Δ For d-c operating current between 0.4 and 2 ma.

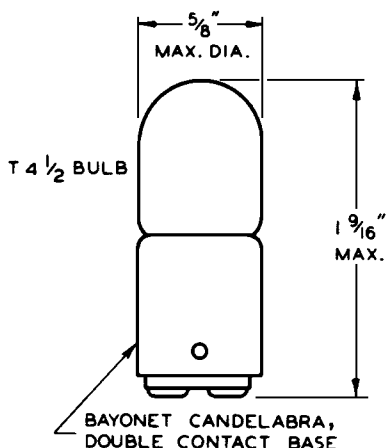

BOTTOM VIEW OF BASE

92C-4614

TUBE MOUNTING POSITION
VERTICAL OR HORIZONTAL

