



5563-A

5563-A

MERCURY-VAPOR THYRATRON

NEGATIVE-CONTROL TRIODE TYPE

*Supersedes Type 5563***GENERAL DATA****Electrical:**

Filament, Coated:

	Min.	Av.	Max.	
Voltage.	4.75	5	5.25	volts
Current at 5 volts	—	10	11	amp

Minimum Heating Time:

On initial installation, with no voltage
on grid or anode, for redistribution of
mercury to lower part of tube. 15 minutes

During subsequent operation, to allow
filament to reach operating temperature
prior to tube conduction 1 minute

Direct Interelectrode Capacitances:^oGrid to anode. 4 μ fGrid to cathode. 16 μ fIonization Time (Approx.). 10 μ secDeionization Time (Approx.). 1000 μ sec

Maximum Critical Grid Current for

instantaneous anode volts = 20000 50 μ a

Anode Voltage Drop (Approx.):

At anode amperes = 11.5. 15 volts

At anode amperes = 70. 25 volts

Grid Control Ratio (Approx.):

Under conditions: 10000-ohm grid resistor,
circuit returns to pin 2, filament voltage
at pin 4 out of phase with anode voltage
by 180°, and condensed-mercury temperature
of 40 °C 275

Mechanical:

Operating Position Vertical, base down

Overall Length 10-3/32" $\pm$ 7/16"

Maximum Diameter 2-5/8"

Bulb T20

Weight (Approx.) 13 oz


Cap. Medium with Tubular Support (JETEC No. C1-39)

Socket Johnson No. 123-211, or equivalent

Base Skirted Medium-Metal-Shell Jumbo 4-Pin
with Bayonet (JETEC No. A4-69)

Basing Designation for BOTTOM VIEW 3X

Pin 1 - Grid
Pin 2 - Filament,
Internal
Shield,
Circuit
Returns

Pin 3 - No Connec-
tionPin 4 - Filament
Cap - Anode^o Without external shield.

← Indicates a change.



5563-A

MERCURY-VAPOR THYRATRON

Temperature Control:

Heating--When the ambient temperature is so low that the normal rise of condensed-mercury temperature above the ambient temperature will not bring the condensed-mercury temperature up to the minimum value of the operating range specified under *Maximum Ratings*, some form of heat-conserving enclosure or auxiliary heater will be required.

Cooling--When the operating conditions are such that the maximum value of the operating condensed-mercury temperature for the applicable service rating is exceeded, provision should be made for forced-air cooling sufficient to prevent exceeding the maximum value.

Temperature Rise of Condensed Mercury to Equilibrium Above Ambient Temperature (Approx.):*

No load	13	°C
Full load	17	°C

CONTROL SERVICE--1n-Phase Operation*

Maximum Ratings, Absolute Values:

For supply frequency of 25 to 60 cps

Operating Condensed-Mercury-Temperature Range

25 to 55 °C 25 to 50 °C

PEAK ANODE VOLTAGE:

Forward	15000 max.	20000 max.	volts
Inverse	15000 max.	20000 max.	volts

GRID VOLTAGE:

Peak or DC, before tube conduction	-500 max.	-500 max.	volts
Average [▲] , during tube conduction	-10 max.	-10 max.	volts

ANODE CURRENT:

Peak	10 max.	6.4 max.	amp
Average ^{●●}	1.8 max.	1.6 max.	amp
Fault, for duration of 0.1 second maximum	70 max.	70 max.	amp

GRID CURRENT:

Average positive ^{●●}	100 max.	100 max.	ma
Peak positive with anode negative	5 max.	5 max.	ma

Maximum Circuit Values:

Grid-Circuit Resistance	0.1 max.	0.1 max.	megohm
-----------------------------------	----------	----------	--------

* With filament volts = 4.75 and no heat-conserving enclosure.

● Filament voltage has a phase angle of either 0° or 180° with respect to the anode voltage.

▲, ●●: See next page.

→ Indicates a change.



5563-A

5563-A

MERCURY-VAPOR THYRATRON

CONTROL SERVICE--Quadrature Operation^{oo}

Maximum Ratings, Absolute Values:

For supply frequency of 25 to 60 cps

Operating Condensed-Mercury-
Temperature Range
25 to 55 °C 25 to 50 °C

PEAK ANODE VOLTAGE:

Forward.	15000 max.	20000 max.	volts
Inverse.	15000 max.	20000 max.	volts

GRID VOLTAGE:

Peak or DC, before tube conduction. . . .	-500 max.	-500 max.	volts
Average [▲] , during tube conduction. . . .	-10 max.	-10 max.	volts

ANODE CURRENT:

Peak	11.5 max.	11.5 max.	amp
Average ^{●●}	2.5 max.	2.5 max.	amp
Fault, for duration of 0.1 second maximum . .	70 max.	70 max.	amp ←

GRID CURRENT:

Average positive ^{●●} . . .	100 max.	100 max.	ma ←
Peak positive with anode negative	5 max.	5 max.	ma

Maximum Circuit Values:

Grid-Circuit Resistance. .	0.1 max.	0.1 max.	megohm
----------------------------	----------	----------	--------

HIGH-SPEED LOAD-CIRCUIT PROTECTION SERVICE[↓] ←

Maximum Ratings, Absolute Values:

Operating Condensed-Mercury-
Temperature Range
40 to 55 °C 40 to 50 °C

PEAK ANODE VOLTAGE:

Forward.	15000 max.	20000 max.	volts
Inverse.	15000 max.	20000 max.	volts

GRID VOLTAGE:

Peak or DC, before tube conduction. . . .	-500 max.	-500 max.	volts
Average [▲] , during tube conduction	-10 max.	-10 max.	volts

ANODE CURRENT:

Peak	100 max.	100 max.	amp
Average [□]	70 max.	70 max.	amp
Average [§]	1.05 max.	1.05 max.	amp

Maximum Circuit Values:

Grid-Circuit Resistance. .	0.1 max.	0.1 max.	megohm
----------------------------	----------	----------	--------

▲, ●, oo, ↓, □, §: See next page.

← Indicates a change.



MERCURY-VAPOR THYRATRON

- ▲ Averaged over one grid-conducting period.
- Averaged over any period of 20 seconds maximum.
- Filament voltage is 60° to 120° out of phase (leading or lagging) with the anode voltage.
- ↓ In this service, the faults may occur in quick succession or may be separated by several months.
- Averaged over any period of 0.1 second maximum.
- § Averaged over any period of 20 seconds maximum. This average-anode-current value is specified to indicate the number of faults that are permissible within the 20-second interval. The number of faults that may occur in any 20-second interval depends on the value of anode current over the averaging period less than 0.1 second and may be determined by

$$\text{Number of Faults} = \frac{1.05 \times 20}{\text{Average Anode Current during fault} \times \text{Duration of Fault}}$$

Example:

Assume that the maximum average anode current is 70 amperes for the maximum duration of 0.1 second. On substitution of these values in the equation, the permissible number of faults is determined to be 3. If the average anode current is less than 70 amperes over an averaging period of less than 0.1 second, it will be obvious that a greater number of faults may occur.

OPERATING CONSIDERATIONS

X rays are produced when the 5563-A is operated with a peak inverse anode voltage above 16000 volts (absolute value). These rays can constitute a health hazard unless the tube is adequately shielded for X-ray radiation. Although relatively simple shielding should prove adequate, make sure it provides the required protection to the operator.

→ Shields and rf filter circuits should be provided for the 5563-A if it is subjected to extraneous high-frequency fields during operation. These fields tend to produce breakdown effects in mercury vapor and are detrimental to tube life and performance. When shields are used, special attention must be given to providing adequate ventilation and to maintaining normal condensed-mercury temperature. Radio-frequency filters are employed to prevent damage caused by rf currents which might otherwise be fed back into the 5563-A.

→ Indicates a change.



5563-A

5563-A

MERCURY-VAPOR THYRATRON

For Circuit Figures, see Front of this Section

CIRCUIT	MAX. TRANS. SEC. VOLTS (RMS) E	APPROX. DC OUTPUT VOLTS TO FILTER E _{av}	MAX. DC OUTPUT AMPERES I _{av}	MAX. DC OUTPUT KW TO FILTER P _{dc}
Fig. 1 Half-Wave Single-Phase In-Phase Operation	14000 [□] 10600 [▲]	6300 4700	1.6 1.8	10 8.5
Fig. 2 Full-Wave Single-Phase In-Phase Operation	7000 [□] 5300 [▲]	6300 4700	3.2 3.6	20 17
Fig. 3 Series Single-Phase In-Phase Operation	14000 [□] 10600 [▲]	12700 9500	3.2 3.6	40 34
Fig. 4 Half-Wave Three-Phase In-Phase Operation	8100 [□] 6100 [▲]	9500 7100	4.8 5.4	45 38
Fig. 5 Parallel Three-Phase Quadrature Operation	8100 [□] 6100 [▲]	9500 7100	15.0 15.0	143 106
Fig. 6 Series Three-Phase Quadrature Operation	8100 [□] 6100 [▲]	19000 14200	7.5 7.5	143 106
Fig. 7 Half-Wave Four-Phase Quadrature Operation	7000 [□] 5300	9000 6700	Resis- tive Load 10.0 10.0	Induc- tive Load 10.0 10.0
Fig. 8 Half-Wave Six-Phase Quadrature Operation	7000 [□] 5300 [▲]	9500 7100	Resis- tive Load 11.0 11.0	Induc- tive Load 11.5 11.5

□ For maximum peak inverse anode voltage of 20000 volts, and condensed-mercury-temperature range of 25 to 50 °C.



▲ For maximum peak inverse anode voltage of 15000 volts, and condensed-mercury-temperature range of 25 to 55 °C.

5563-A



5563-A

MERCURY-VAPOR THYRATRON

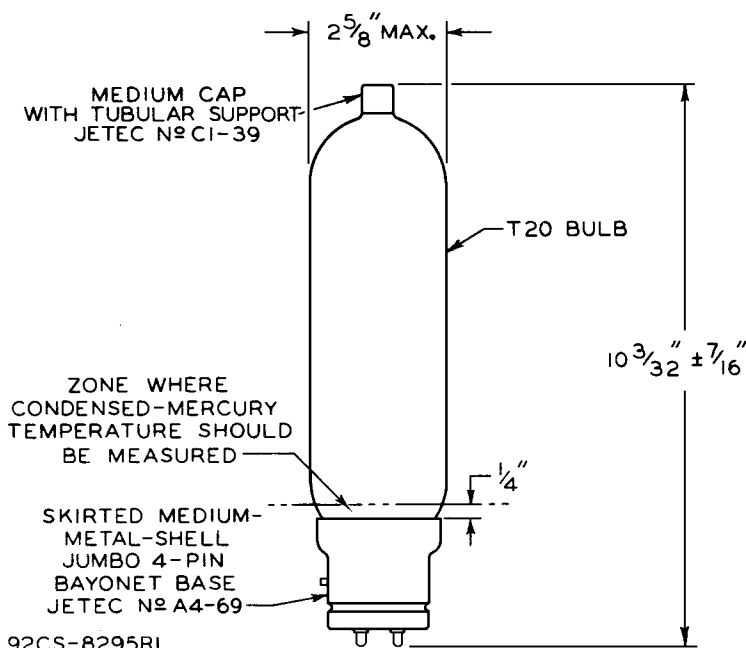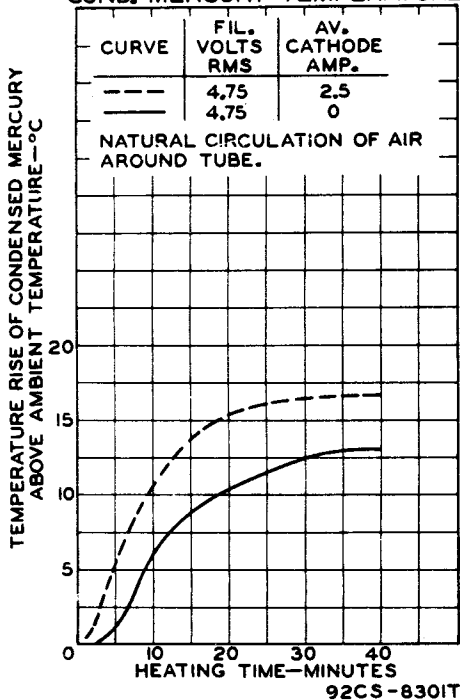RATE OF RISE OF
COND.-MERCURY TEMPERATURE



5563-A

5563-A OPERATIONAL RANGE OF CRITICAL GRID VOLTAGE

RANGE IS FOR CONDITIONS WHERE:


$E_f = 5.0$ VOLTS AC $\pm 5\%$; CIRCUIT RETURNS TO PIN 2.

FILAMENT VOLTAGE AT PIN 4 IS (-) WHEN ANODE VOLTAGE IS (+).

THE RANGE INCLUDES INITIAL AND LIFE VARIATIONS OF INDIVIDUAL TUBES.

GRID RESISTOR = 10000 TO 100000 OHMS


CONDENSED-MERCURY TEMPERATURE RANGE = 25° TO 55°C

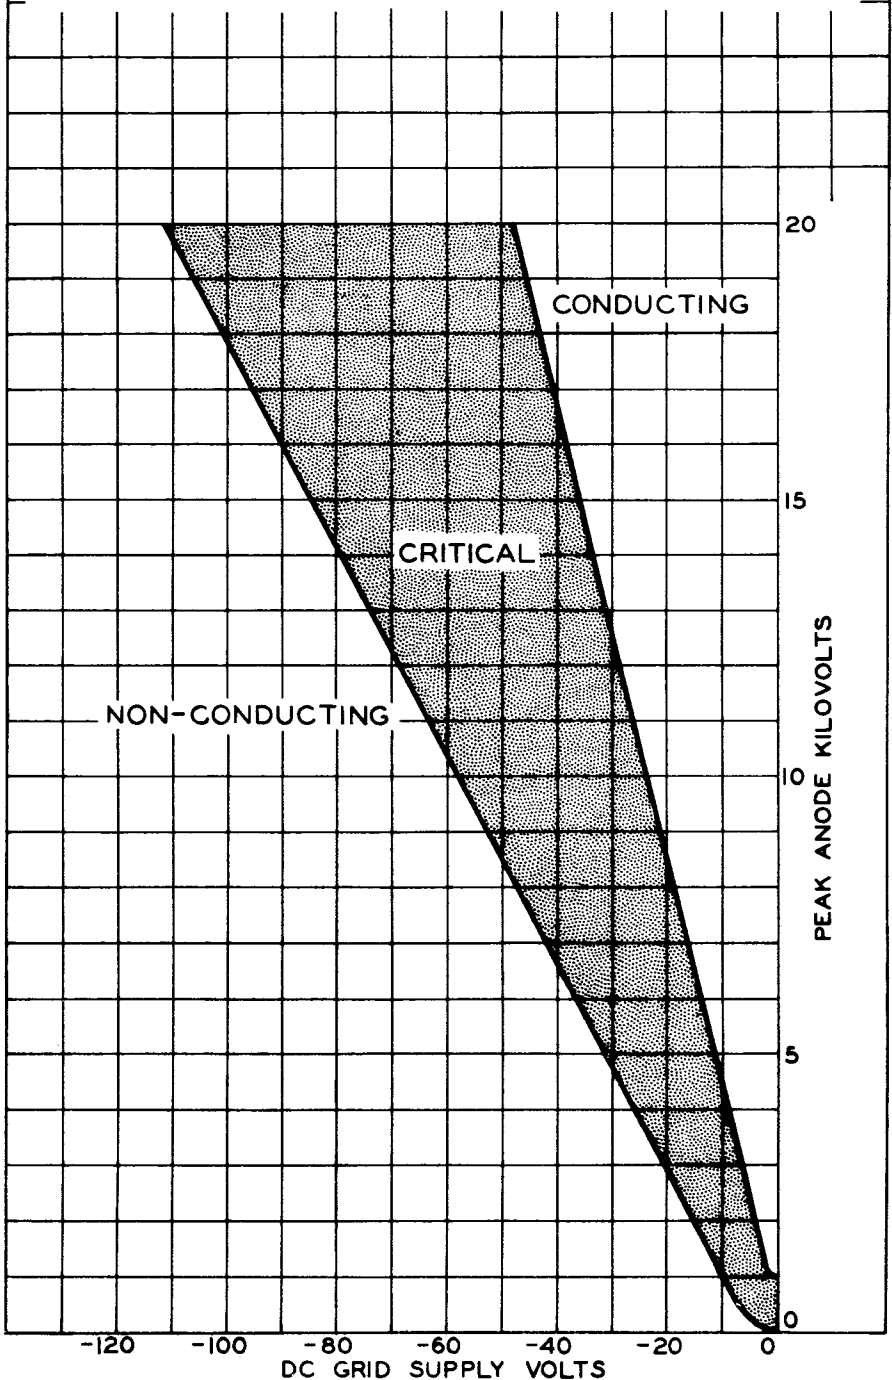




5563-A

CHARACTERISTIC CURVES

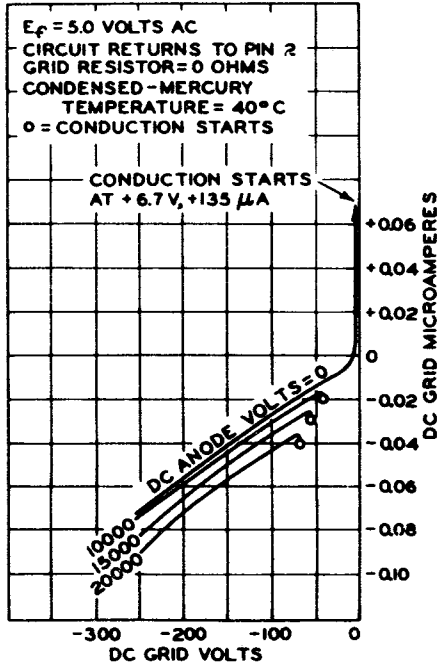AVERAGE GRID
CHARACTERISTICS
BEFORE TUBE CONDUCTION

92CS-8313T

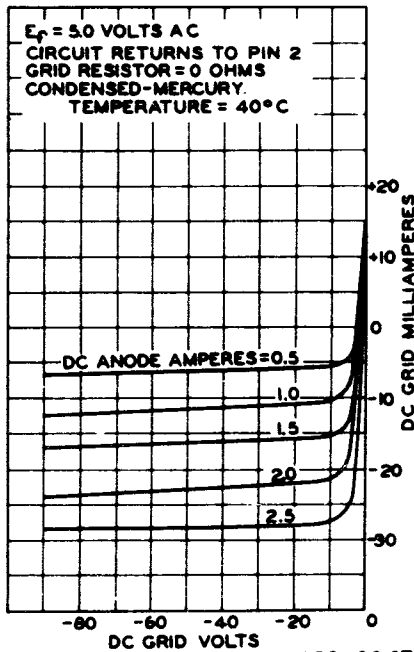AVERAGE GRID
CHARACTERISTICS
DURING TUBE CONDUCTION


92CS-8315T



5563-A

5563-A


CHARACTERISTIC CURVES

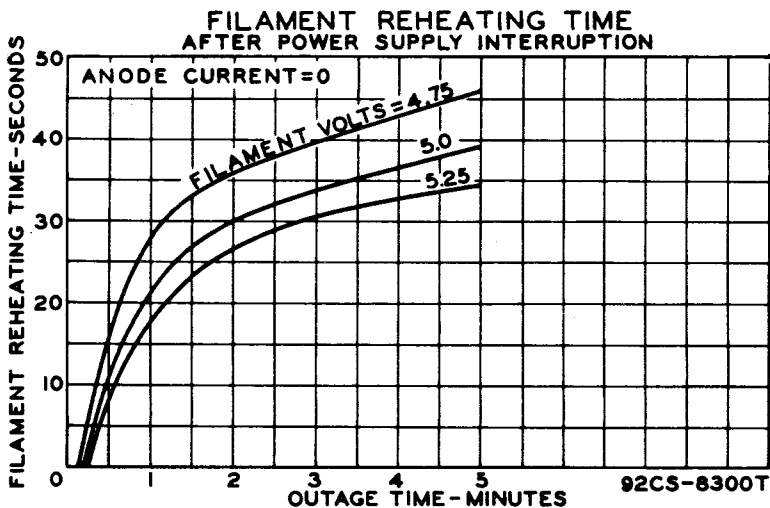

SHIFT OF AVERAGE CONTROL CHARACTERISTIC WITH CHANGE IN CONDENSED-MERCURY TEMPERATURE

$E_f = 5.0$ VOLTS AC
GRID RESISTOR = 10000 OHMS

CURVE	CONDENSED MERCURY TEMP. - °C
A	25
B	40
C	55

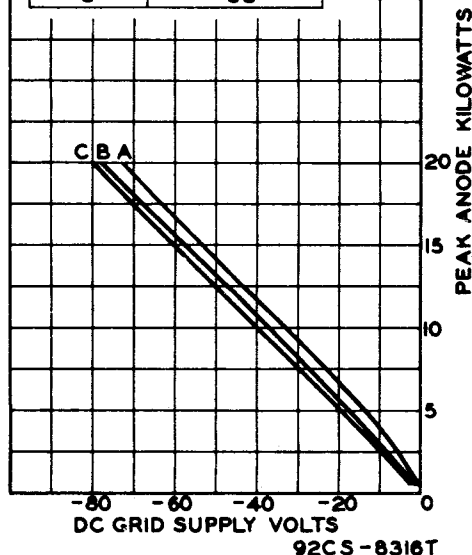



5563-A

SHIFT OF AVERAGE CONTROL CHARACTERISTICS WITH CHANGE IN FILAMENT PHASING AND CIRCUIT RETURN

 $E_f = 5.0$ VOLTS AC

GRID RESISTOR = 10000 OHMS


CONDENSED-MERCURY TEMPERATURE = 40°C

CURVE	PHASE ANGLE*	CIRCUIT RETURN
A	0°	PIN 2
B	0°	CT [□]
C	0°, 180° 90°	PIN 4 ANY •
D	180°	CT [□]
E	180°	PIN 2

* BETWEEN FILAMENT VOLTAGE AT PIN 4 AND
ANODE VOLTAGE

[□] CENTER TAP OF FILAMENT TRANSFORMER

• PIN 2, PIN 4, OR CT

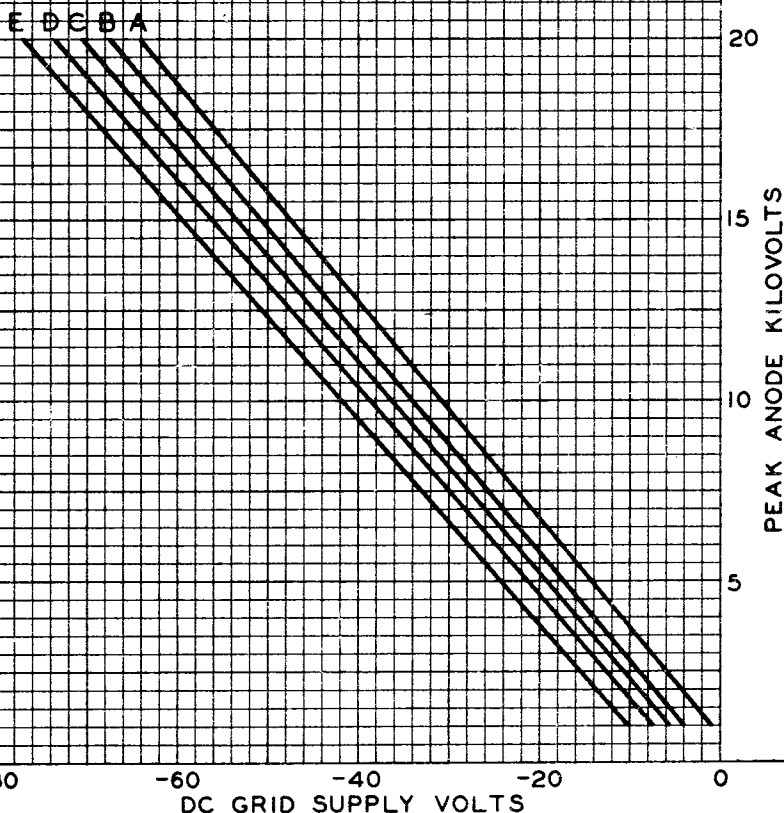



5563-A

5563-A


SHIFT OF AVERAGE CONTROL CHARACTERISTICS WITH CHANGE IN FILAMENT PHASING AND CIRCUIT RETURN AT LOW ANODE VOLTAGES

$E_f = 5.0$ VOLTS AC
GRID RESISTOR = 10000 OHMS
CONDENSED-MERCURY TEMPERATURE = 40°C

CURVE	PHASE ANGLE *	CIRCUIT RETURN
A	0°	PIN 2
B	180°	PIN 4
C	0°	CT □
D	180°	CT □
E	0°	PIN 4
F	180°	PIN 2

* BETWEEN FILAMENT VOLTAGE AT PIN 4 AND
ANODE VOLTAGE

□ CENTER TAP OF FILAMENT TRANSFORMER

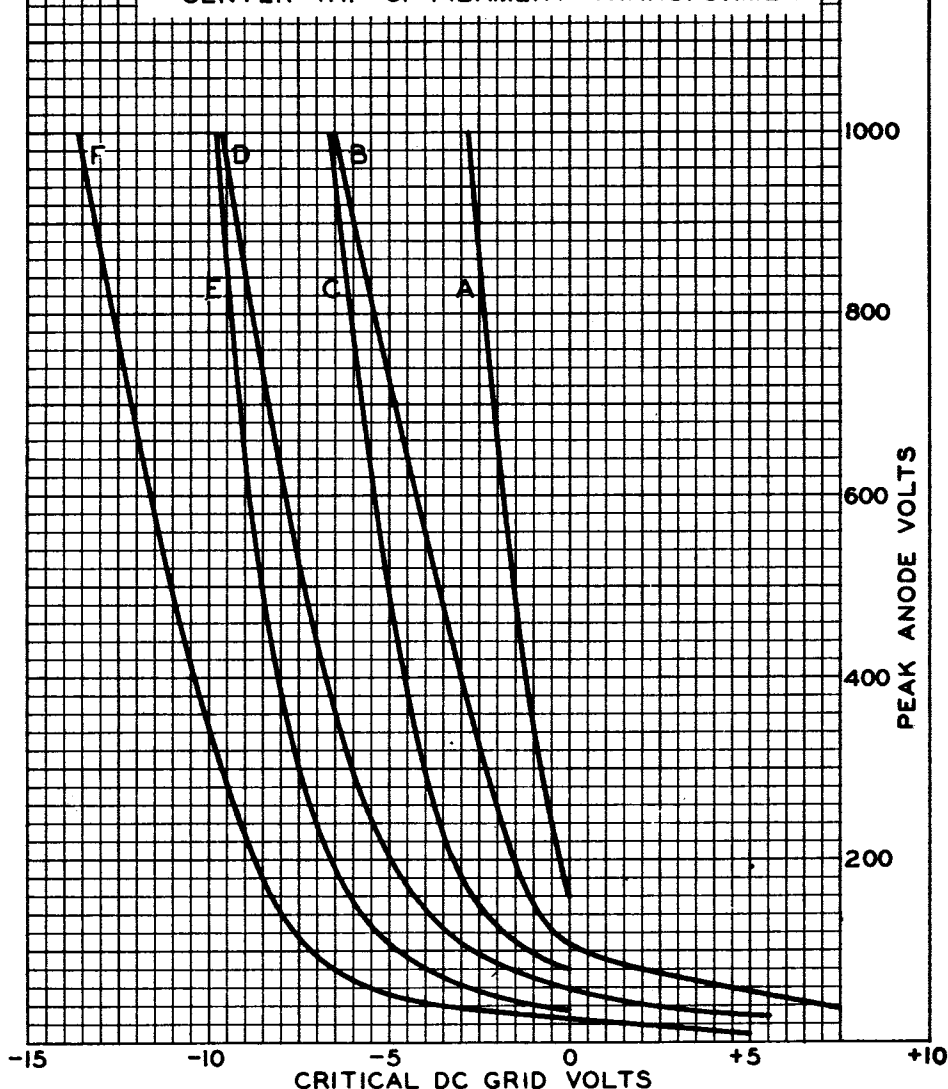



5563-A

SHIFT OF AVERAGE CONTROL CHARACTERISTICS
WITH CHANGE IN GRID-RESISTOR VALUE $E_f = 5.0$ VOLTS AC
CONDENSED-MERCURY TEMPERATURE = 40°C

CURVE	GRID RESISTOR MEGOHMS	CIRCUIT RETURN	PHASE ANGLE*
A	0.01	PIN 2	180°
B	0.1	PIN 2	180°
C	1	PIN 2	180°

*BETWEEN FILAMENT VOLTAGE AT PIN 4 AND
ANODE VOLTAGE