



C3J

C3J/5632

XENON THYRATRON

NEGATIVE-CONTROL TRIODE TYPE

GENERAL DATA


Electrical:

Filament, Coated and	Min.	Average	Max.	
Mid-tapped:				
Voltage between pins 1 and 4	2.4	2.5	2.6	ac or dc volts
Current at 2.5 volts.	7	9	11	amp
Minimum heating time prior to tube conduction				30 sec
Direct Interelectrode Capacitances (Approx.):				
Grid to anode				2 μf
Grid to cathode				14 μf
Maximum Deionization Time				1000 μsec
Maximum Critical Grid Current				10 μamp
Anode Voltage Drop:				
Average, at beginning of life				10 volts
Maximum, at end of life				14 volts
Maximum Commutation Factor ¹ , averaged over first 350 volts of inverse anode voltage rise.				0.66 $\text{va}/\mu\text{s}^2$
Grid Control Ratio (Approx.):				
For conditions: 10000-ohm grid resistor, circuit returns to filament mid-tap, dc anode voltage, and dc grid voltage				200

Mechanical:

Mounting Position	Any
Maximum Overall Length.	6"
Maximum Diameter.	1-9/16"
Weight (Approx.).	3 oz
Cap	Medium (JETEC No.C1-5)
Bulb.	T-12
Base.	Medium-Metal-Shell Small 4-Pin with Bayonet (JETEC No.A4-89)
Basing Designation for BOTTOM VIEW.	4CF

Pin 1-Filament
Pin 2-Filament
Mid-Tap &
Circuit
Returns



Pin 3-Grid
Pin 4-Filament
Cap-Anode

GRID-CONTROLLED RECTIFIER SERVICE

Maximum Ratings, Absolute Values:

PEAK ANODE VOLTAGE:

Forward	900 max. volts
Inverse	1250 max. volts

¹ Defined as the product of the rate of current decay in amperes per microsecond just before conduction ceases and the rate of inverse voltage rise in volts per microsecond following current conduction.

C3J



C3J/5632

XENON THYRATRON

GRID VOLTAGE:

Peak, before tube conduction. . . . -100 max. volts

ANODE CURRENT:

Peak. 30 max. amp

Average. 2.5 max. amp

Overload:

Rating I*, for duration of . .	{	0.37 sec. . .	30 max.	amp
		0.50 sec. . .	22.5 max.	amp
		1 sec. . .	11.25 max.	amp
		2 sec. . .	5.63 max.	amp
Rating II**, for duration of . .	{	3 sec. . .	3.75 max.	amp
		4 sec. . .	2.82 max.	amp
		3 sec. . .	3.75 max.	amp
		4 sec. . .	3.40 max.	amp
Fault, for duration of 0.1 second maximum	{	4.5 sec. . .	3.30 max.	amp
			300 max.	amp

Fault, for duration of 0.1 second
maximum 300 max. amp

AMBIENT-TEMPERATURE RANGE -55 to +75 °C

• Averaged over any period of 4.5 seconds.

* Averaged over duration of overload occurring no more than once in any period of 4.5 seconds.

** Averaged over duration of overload occurring no more than once in any period of 30 seconds.

OPERATING CONSIDERATIONS

Circuit returns should be connected to filament mid-tap (pin 2).

The *anode* of the C3J/5632 may show a red color when the tube is operated at full load.


Sufficient *anode-circuit resistance*, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings of the tube.



C3J

C3J/5632

XENON THYRATRON

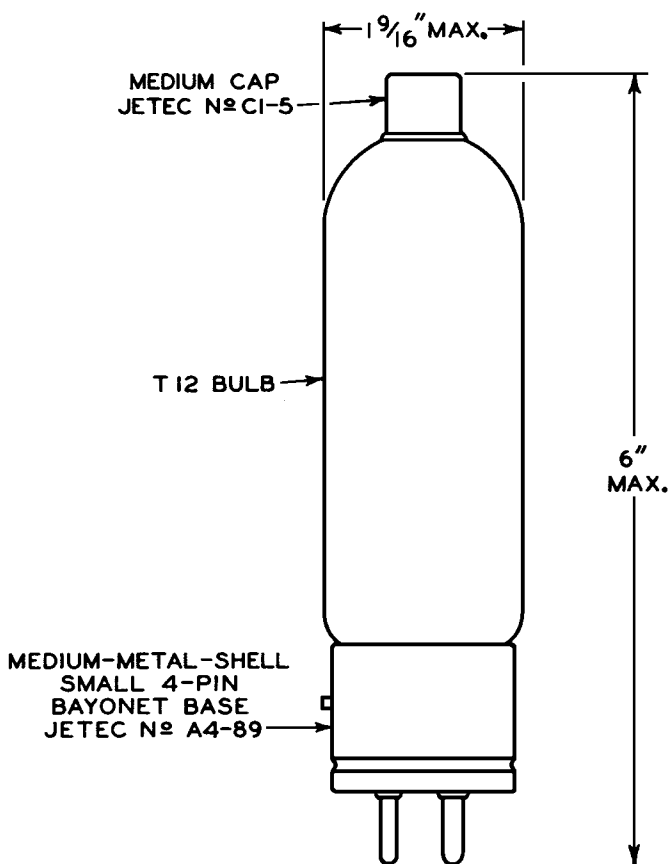

92CS-9109

C3J



C3J/5632

XENON THYRATRON

OPERATIONAL RANGE
OF CRITICAL GRID VOLTAGE

RANGE IS FOR CONDITIONS WHERE:
 $E_f = 2.5 \text{ VOLTS} \pm 5\%$; CIRCUIT RE-
TURNS AND PIN 2 CONNECTED TO
FILAMENT TRANSFORMER CENTER-
TAP. THE RANGE INCLUDES INITIAL
AND LIFE VARIATIONS OF INDIVIDUAL
TUBES. GRID RESISTOR = 0 TO 10000
OHMS. AMBIENT-TEMPERATURE RANGE
= -55 TO 75°C .

