



956

956

SUPER-CONTROL R-F AMPLIFIER PENTODE**ACORN TYPE***Especially for wavelengths as short as 0.7 meter*

Heater	Coated Unipotential Cathode	
Voltage	6.3	a-c or d-c volts
Current	0.15	amp.
Direct Interelectrode Capacitances:		
Grid to Plate*	0.007 max.	μmf
Input	3.4	μmf
Output	3.0	μmf


Overall Length	1-11/16" $\pm$ 3/16"
Overall Diameter	1-3/32" $\pm$ 1/16"

Bulb	T-4 $\frac{1}{2}$
------	-------------------

End Terminals	See Outline in GENERAL SECTION	Two
Base		Small Radial 5-Pin

Pin 1-Heater	Pin 5-Cathode
Pin 2-Grid No.2	P-Plate
Pin 3-Grid No.3	G ₁ -Grid No.1
Pin 4-Heater	

RCA Socket	Stock No.9925
RCA Grid & Plate Clips	Stock No.9939
Mounting Position	Any



P is on Long Part of Bulb: Top
G₁ is on Short Part of Bulb: Bottom
BOTTOM VIEW (5BB)

Maximum and Minimum Ratings Are Design-Center Values
AMPLIFIER

D-C Plate Voltage	250 max.	volts
D-C Screen (Grid No.2) Voltage	100 max.	volts
Grid (No.1) Voltage	-3 min.	volts
Plate Dissipation	1.7 max.	watts
Screen Dissipation	0.3 max.	watt
D-C Heater-Cathode Potential	80 max.	volts

Characteristics—Class A₁ Amplifier:

D-C Plate Voltage	250	volts
Suppressor (Grid No.3) Connected to cathode at socket		
D-C Screen Voltage	100	volts
D-C Grid (No.1) Voltage*	-3	volts
Plate Resistance	0.7 approx.	megohm
Transconductance	1800	μmhos
Grid Bias for		
Transcond. of approx. 2 μmhos	-45	volts
D-C Plate Current	6.7	ma.
D-C Screen Current	2.7	ma.

MIXER—In Superheterodyne Circuit

D-C Plate Voltage	250 max.	volts
D-C Screen Voltage	100 max.	volts
D-C Heater-Cathode Potential	80 max.	volts

Typical Operation:

D-C Plate Voltage	100	250	volts
Suppressor	Connected to cathode at socket		
D-C Screen Voltage	100	100	volts
D-C Grid Voltage	-10	-10 approx.	volts

The grid bias shown is minimum for an oscillator peak voltage of 9 volts.
These values are optimum.

●,* :See next page.

← Indicates a change.

JUNE 30, 1944

RCA VICTOR DIVISION

DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY




SUPER-CONTROL R-F AMPLIFIER PENTODE

(continued from preceding page)

- With shield baffle.
- * Under maximum rated conditions, the resistance in the grid circuit should not exceed 0.5 megohm with fixed bias, or 1.0 megohm with cathode bias.

*Typical R-F Amplifier Circuit for the 956
is the same as that for Type 954.*

AVERAGE PLATE CHARACTERISTICS

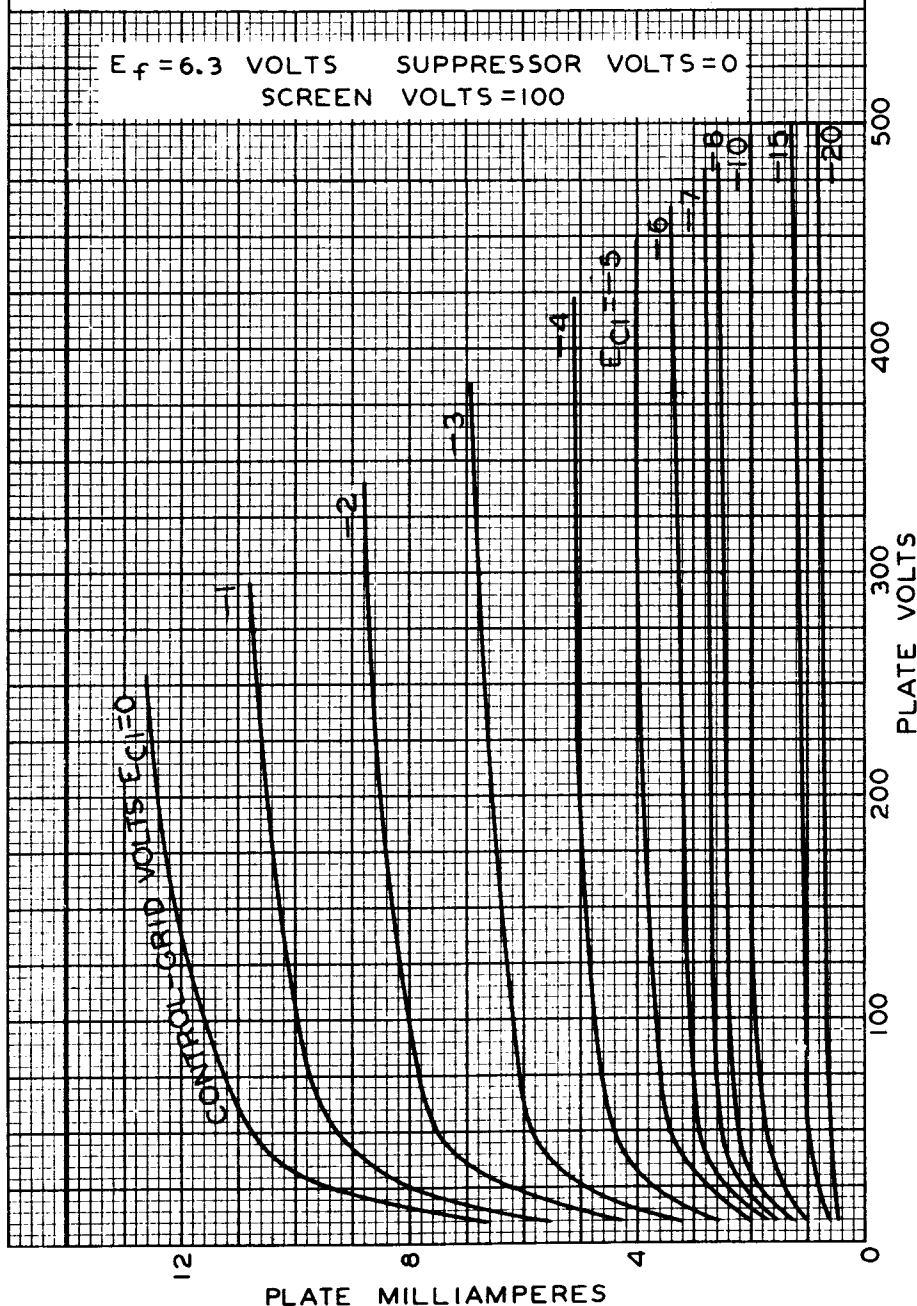




956

956

AVERAGE CHARACTERISTICS

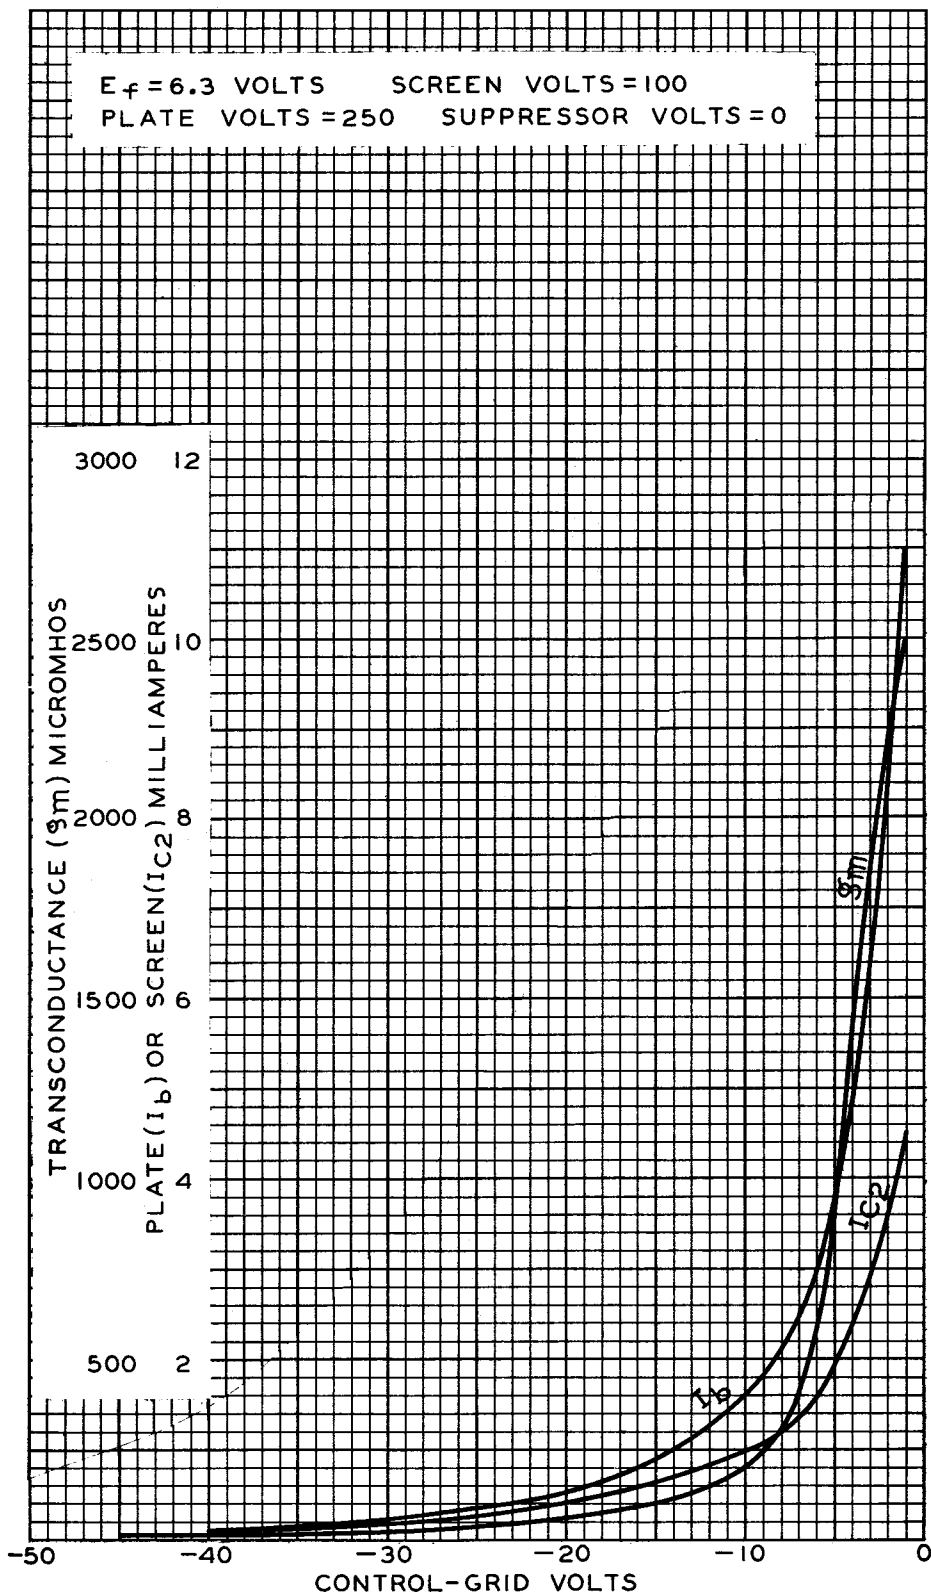



AVERAGE CHARACTERISTICS

