



9003


9003

SUPER-CONTROL R-F AMPLIFIER PENTODE

MIDGET TYPE

Heater	Coated Unipotential Cathode	
Voltage	6.3	a-c or d-c volts
Current	0.15	amp.
Direct Interelectrode Capacitances:		
Grid to Plate	0.01 max.	μmf
Input	3.4	μmf
Output	3.0	μmf
Maximum Overall Length		1-13/16"
Maximum Seated Height		1-9/16"
Length from Base Seat to Bulb Top (excluding tip)		1-3/16" $\pm$ 3/32"*
Maximum Diameter		3/4"
Bulb		T-5-1/2
Base [▲]		Miniature Button 7-Pin

- Pin 1 - Grid
Pin 2 - Cathode
Pin 3 - Heater
Pin 4 - Heater



- Pin 5 - Plate
Pin 6 - Screen
Pin 7 - { Cathode,
Grid No. 3,
Internal
Shield

RCA Socket

Mounting Position

BOTTOM VIEW

Stock No. 9914

Any

Maximum and Minimum Ratings Are Design-Center Values
AMPLIFIER

Plate Voltage	250 max.	volts
Screen Voltage	100 max.	volts
Grid Voltage	-3 min.	volts
Plate Dissipation	1.7 max.	watts
Screen Dissipation	0.3 max.	watt

Typical Operation and Characteristics - Class A₁ Amplifier:

Plate Voltage	250	volts
Screen Voltage	100	volts
Grid Voltage	-3	volts
Plate Resistance	0.7 approx.	megohm
Transconductance	1800	μmhos

Grid Bias for Transcond. of 15 μmhos	-35	volts
--	-----	-------

Grid Bias for Transcond. of 2 μmhos	-45	volts
---	-----	-------

Plate Current	6.7	ma.
---------------	-----	-----

Screen Current	2.7	ma.
----------------	-----	-----

Typical Operation as Mixer in Superheterodyne Circuit:

Plate Voltage	100	250	volts
Screen Voltage	100	100	volts
Grid Voltage #	-10	-10 approx.	volts
Conversion Transconductance	-	600 approx.	μmhos

The grid bias is minimum for an oscillator peak voltage of 9 volts.
These values are optimum.

[▲] The center hole in sockets designed for this base provides for the possibility that this tube type may be manufactured with the exhaust-tube tip at the base end. For this reason, it is recommended that in equipment employing this tube type, no material be permitted to obstruct the socket hole.

Shielding Considerations & Heater-Cathode Connections
for the 9003 are the same as for Type 9001.

← Indicates a change.

* Temporary minimum length = 1-1/16".

OCT. 1, 1943

RCA VICTOR DIVISION

DATA


RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

9003



9003

AVERAGE PLATE CHARACTERISTICS

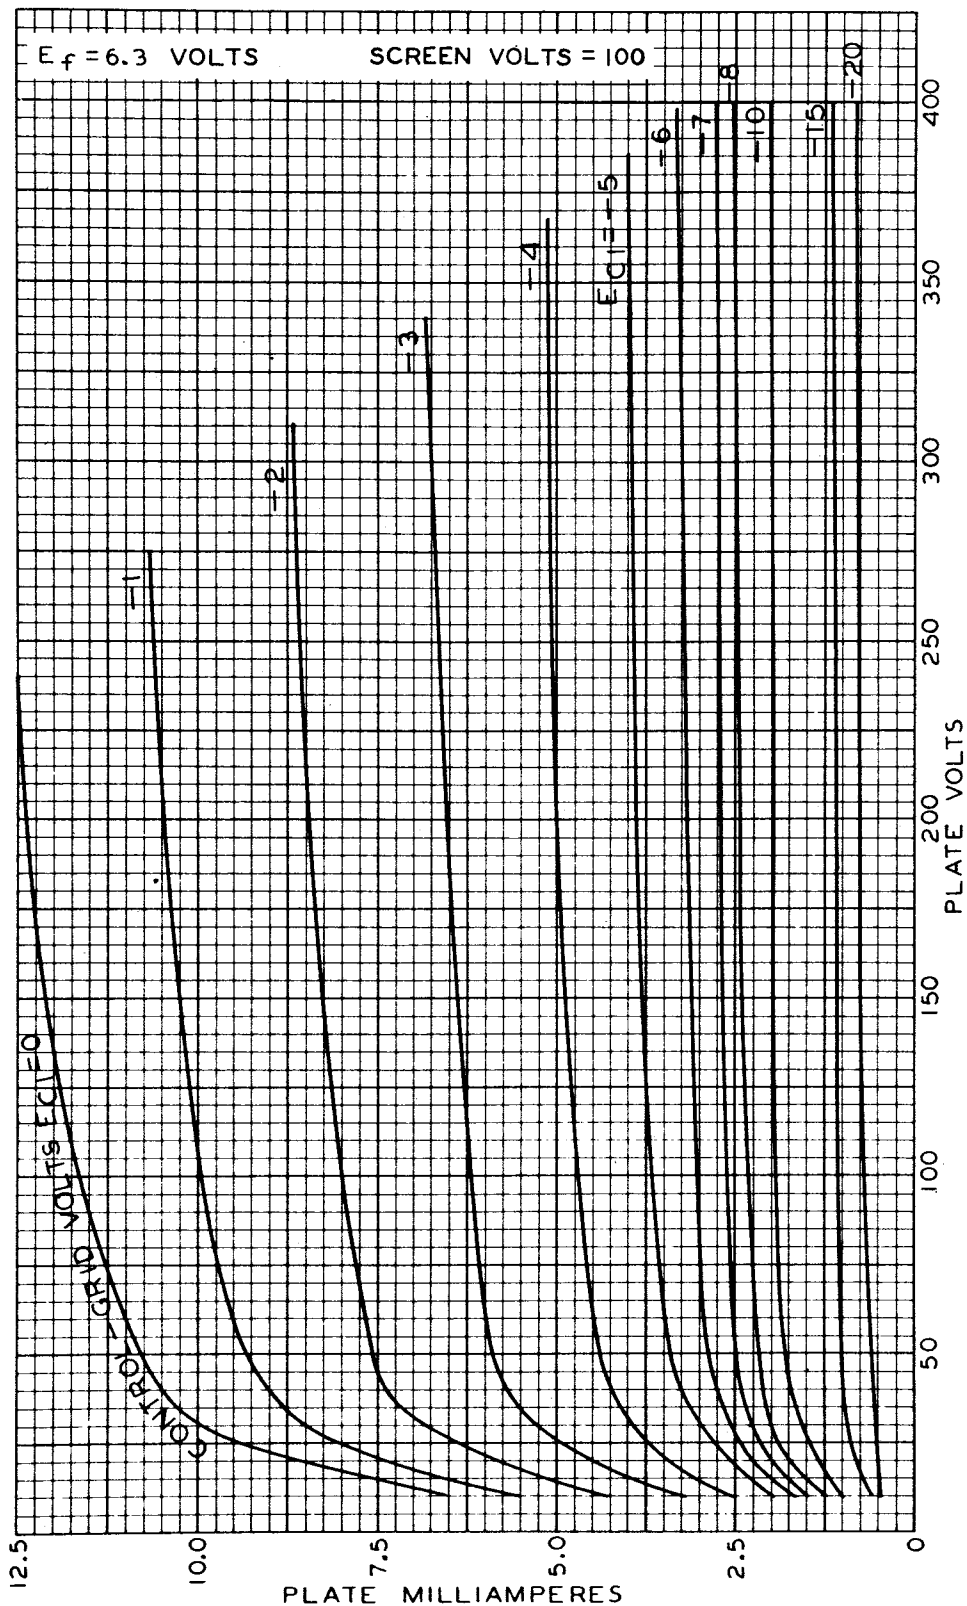

SEPT. 17, 1943

 RCA VICTOR DIVISION
 RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92C-6288




9003

9003

AVERAGE CHARACTERISTICS

$E_f = 6.3$ VOLTS SCREEN VOLTS = 100
PLATE VOLTS = 250

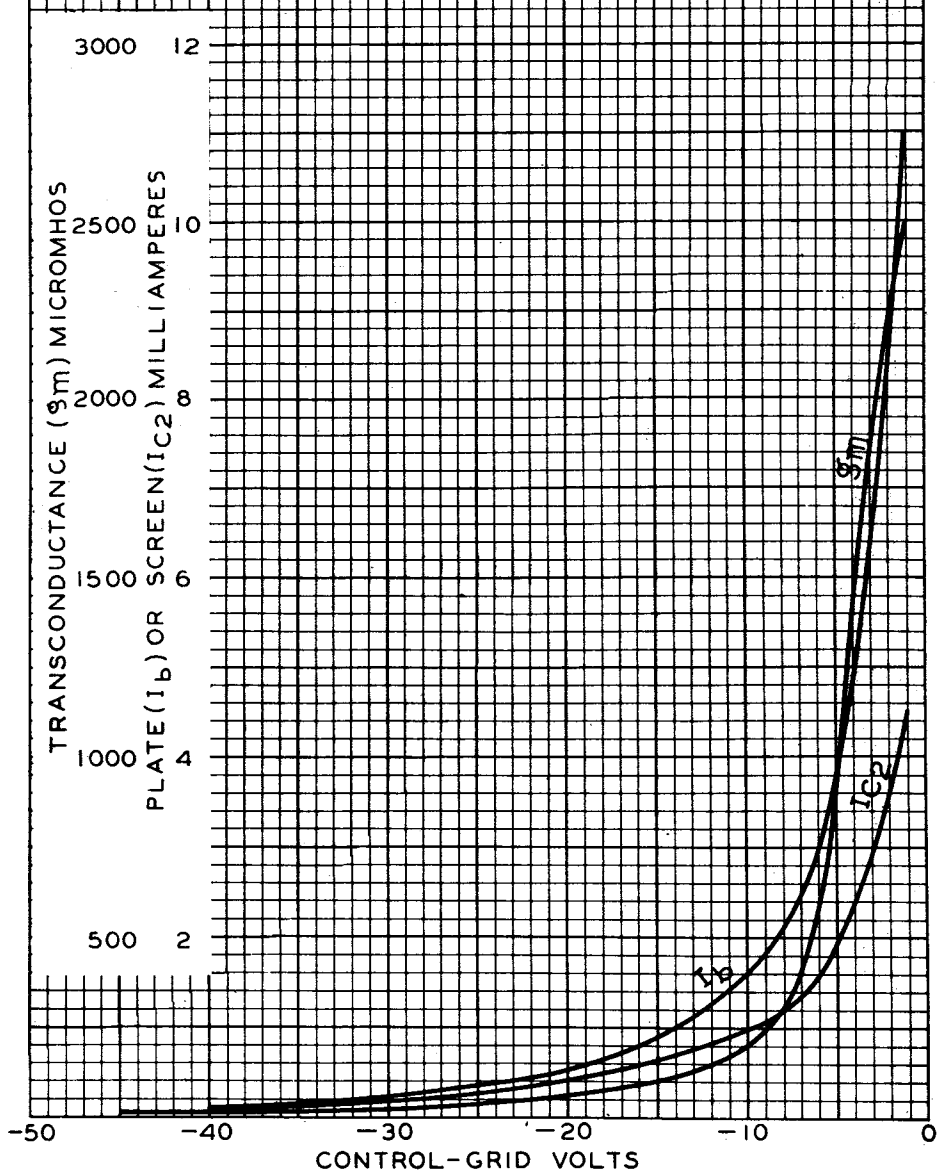

9003



9003

AVERAGE CHARACTERISTICS

