



IDN5

IDN5

DIODE—REMOTE-CUTOFF PENTODE

7-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Filament, Coated:

Voltage. 1.4 dc volts
 Current. 0.05 amp

Direct Interelectrode Capacitance (Approx.):^o

Diode plate to pentode grid No.1 0.04 μmf

Characteristics, Class A₁ Amplifier (Pentode Unit):

Plate Voltage. 67.5 volts
 Grid-No.2 (Screen-Grid) Voltage. 67.5 volts
 Grid-No.1 (Control-Grid) Voltage 0 volts
 Plate Resistance (Approx.) 0.6 megohm
 Transconductance 630 μmhos
 Plate Current. 2.1 ma
 Grid-No.2 Current. 0.55 ma
 Grid-No.1 Voltage (Approx.) for
 transconductance of 10 μmhos -11.5 volts


Mechanical:

Mounting Position. Any
 Maximum Overall Length 2-1/8"
 Maximum Seated Length. 1-7/8"
 Length, Base Seat to Bulb Top (Excluding tip). 1-1/2" $\pm$ 3/32"
 Maximum Diameter 3/4"
 Dimensional Outline. See General Section
 Bulb T5-1/2
 Base Small-Button Miniature 7-Pin (JETEC No.E7-1)
 Basing Designation for BOTTOM VIEW6BW

Pin 1—Filament (-),
 Pentode
 Grid No.3

Pin 2—Pentode
 Plate

Pin 3—Pentode
 Grid No.2



Pin 4—Diode
 Plate

Pin 5—No Connec-
 tion

Pin 6—Pentode
 Grid No.1

Pin 7—Filament (+)

PENTODE UNIT - Class A₁ Amplifier

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE. 90 max. volts
 GRID-No.2 (SCREEN-GRID) VOLTAGE. 90 max. volts
 GRID-No.1 (CONTROL-GRID) VOLTAGE:
 Negative bias value. 50 max. volts
 Positive bias value. 0 max. volts
 CATHODE CURRENT. 3 max. ma

Maximum Circuit Values:

Grid-No.1—Circuit Resistance 3.3 max. megohms

^o Without external shield.

IDN5



IDN5

DIODE-REMOTE-CUTOFF PENTODE

DIODE UNIT

Maximum Ratings, Design-Center Values:

PLATE CURRENT. 0.25 max. ma

Characteristics:


Average Plate Current with dc plate
voltage of 10 volts. 1 ma



IDN5

IDN5

AVERAGE PLATE CHARACTERISTICS PENTODE UNIT

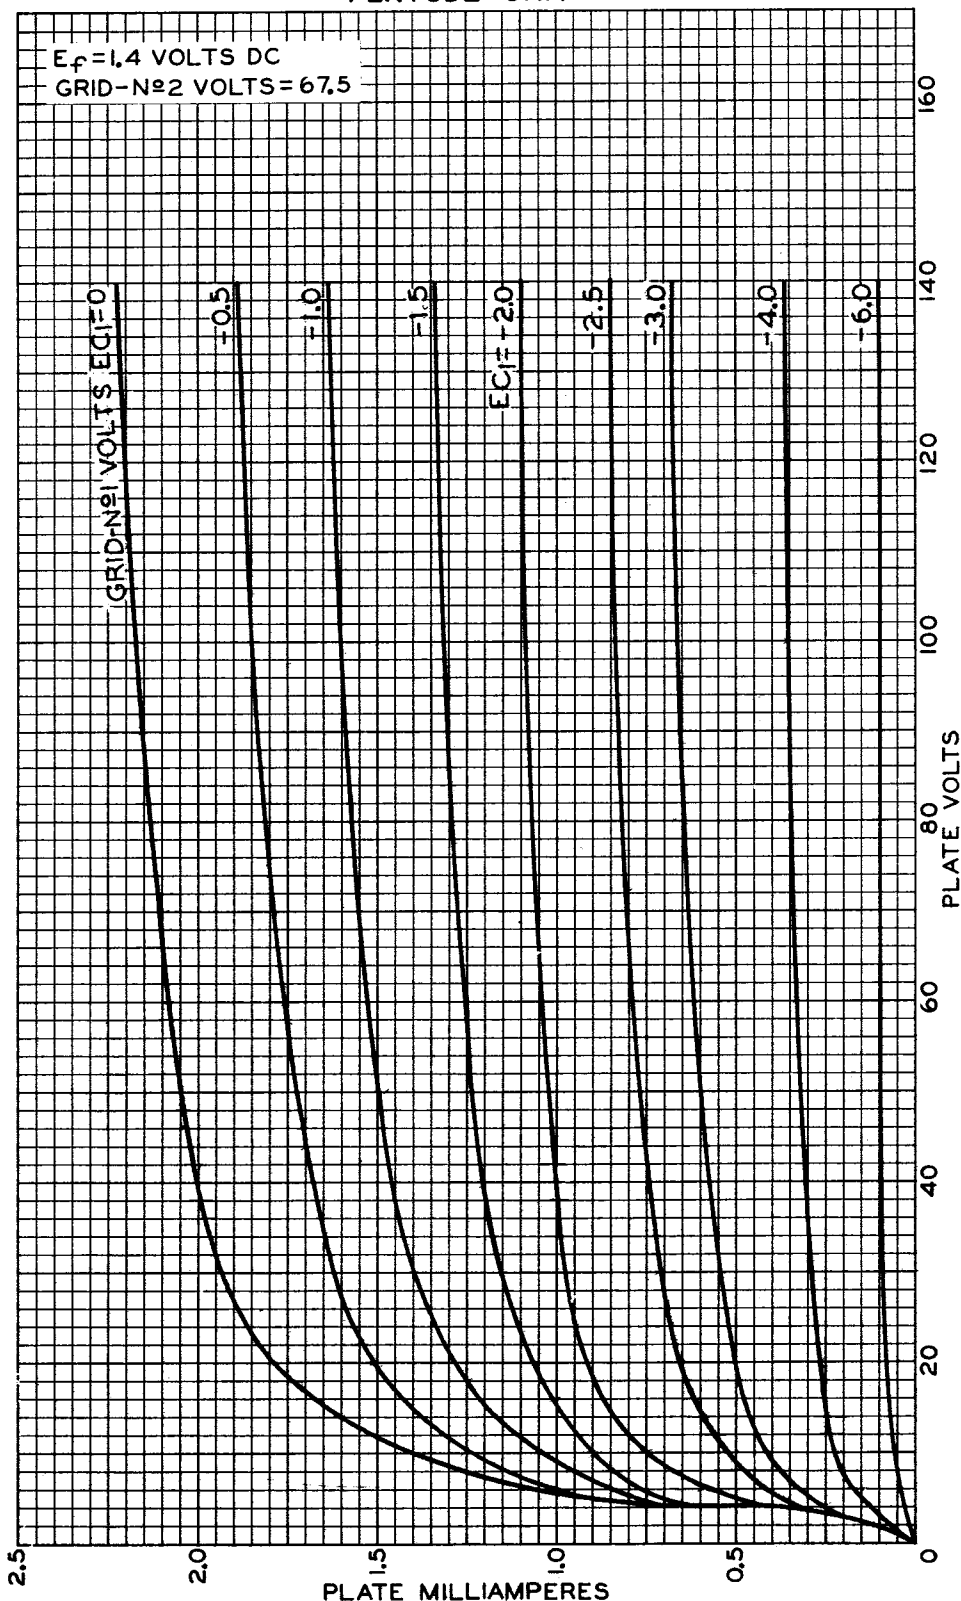

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-9348

IDN5



IDN5

AVERAGE CHARACTERISTICS PENTODE UNIT

$E_f = 1.4$ VOLTS DC
GRID-Nº2 VOLTS = 67.5

