




2C21/1642

2C21/1642

TWIN-TRIODE AMPLIFIER

Heater ■	Coated Unipotential Cathodes		
Voltage	6.3	a-c or d-c volts	
Current	0.6	amp.	
Direct Interelectrode Capacitances:°			
	<u>Triode Unit T₁</u>	<u>Triode Unit T₂</u>	
Grid to Plate	2.4	1.8	μmf
Grid to Cathode	2.6	1.6	μmf
Plate to Cathode	1.4	2.0	μmf
Overall Length	4-9/32" to 4-17/32"		
Seated Height	3-21/32" to 3-29/32"		
Maximum Diameter	1-9/16"		
Bulb	ST-12		
Cap	Small Metal		
Base	Small 7-Pin, Micanol		
Pin 1-Heater	Pin 5-Plate T ₁		
Pin 2-Cathode T ₂	Pin 6-Cathode T ₁		
Pin 3-Plate T ₂	Pin 7-Heater		
Pin 4-Grid T ₁	Cap -Grid T ₂		
RCA Socket	Stock No.9922		
Mounting Position	Any		



BOTTOM VIEW (7BH)

Maximum Ratings Are Design-Center Values

AMPLIFIER - Each Unit

Plate Voltage	250 max.	volts
Plate Dissipation	2.1 max.	watts
Characteristics - Class A₁ Amplifier:		
Plate Voltage	250	volts
Grid Voltage	-16.5	volts
Amplification Factor	10.4	
Plate Resistance	7600	ohms
Transconductance	1375	μmhos
Plate Current	8.3	ma.


- In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.
- ° With no external shield.

2C21



2C21

TWIN-TRIODE AMPLIFIER

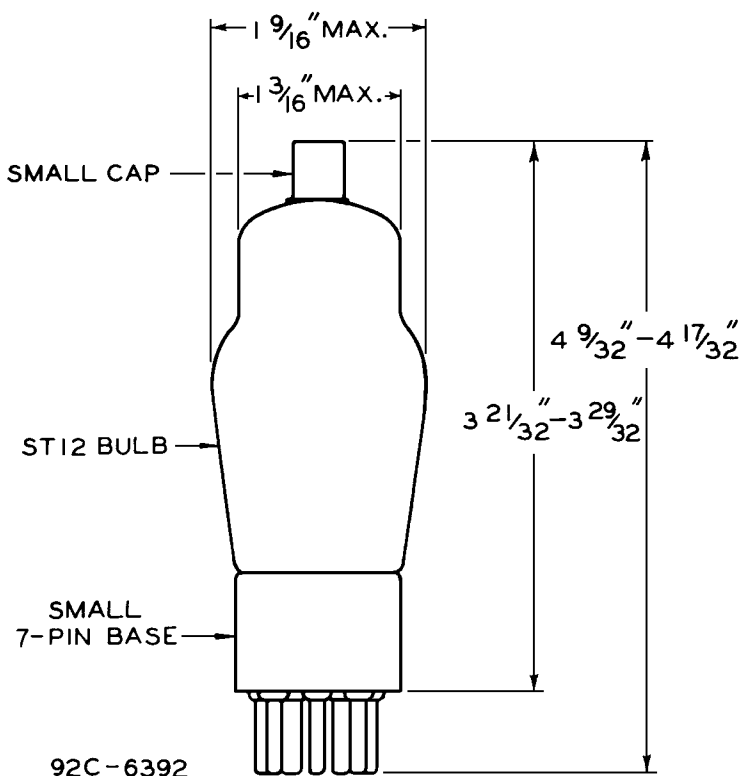

Mar. 20, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

TENTATIVE DATA



2C21

AVERAGE PLATE CHARACTERISTICS EACH TRIODE UNIT

2C21

$E_f = 6.3$ VOLTS

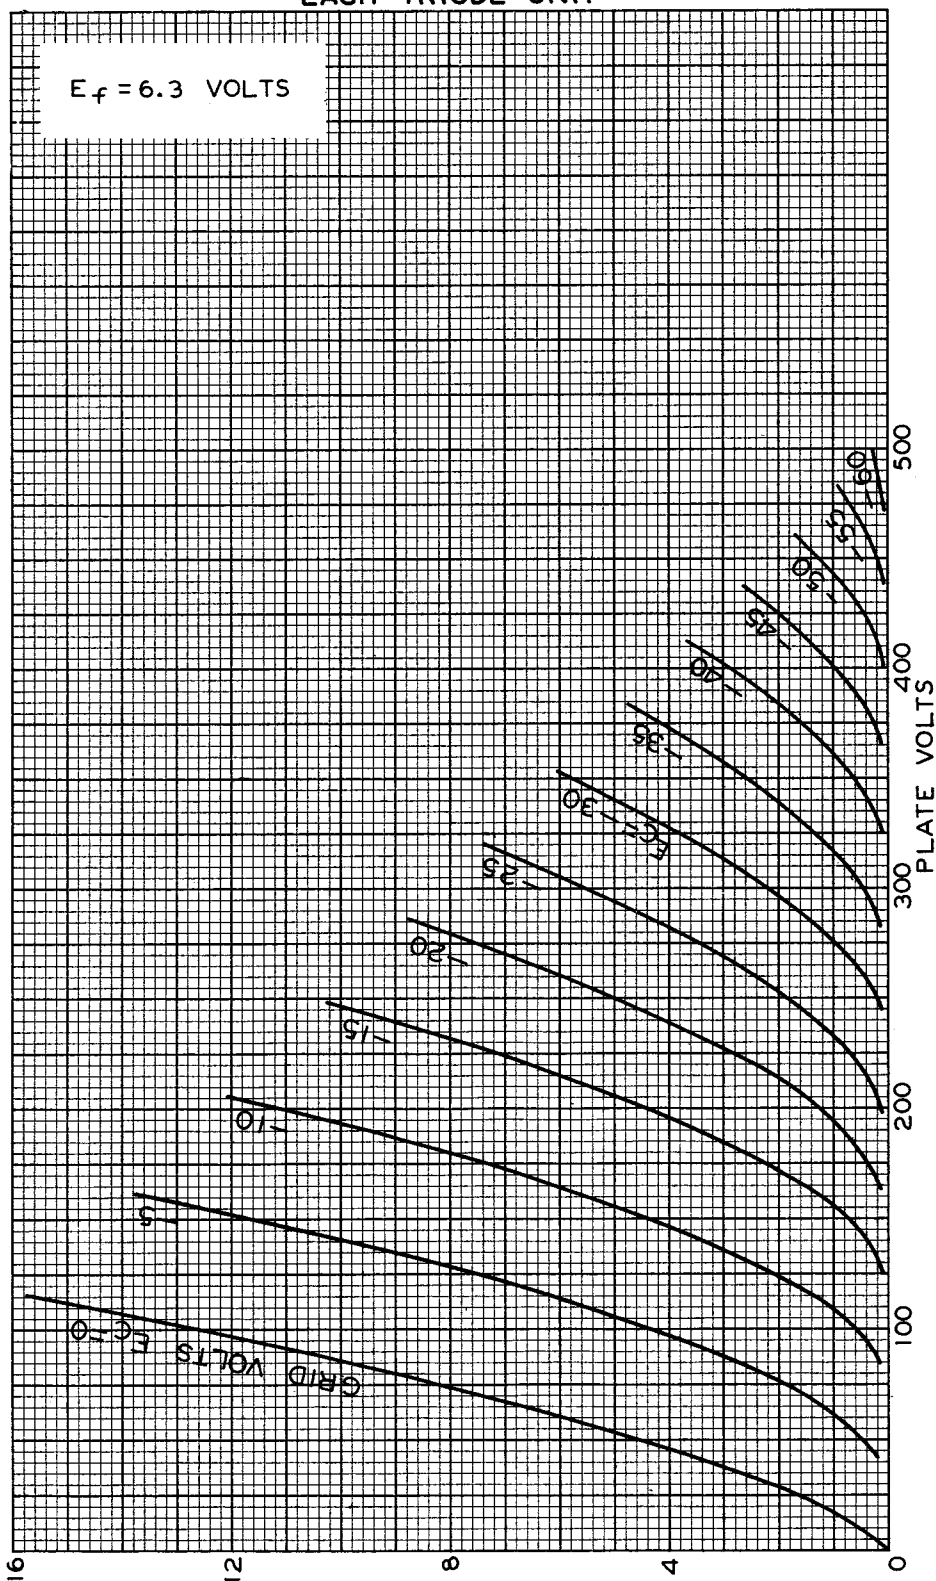


PLATE MILLIAMPERES

DEC. 1, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6385RI