



5AS4

5AS4

FULL-WAVE VACUUM RECTIFIER

GENERAL DATA

Electrical:

Filament, Coated:

Voltage. 5 ac volts
 Current. 3 amp

Mechanical:

Mounting Position. Vertical, base up or down, or
 Horizontal with pins 1 and 4 in vertical plane

Maximum Overall Length 5-1/8"

Maximum Seated Length. 4-9/16"

Maximum Diameter 2-1/16"

Bulb ST-16

Base Medium-Shell Octal 8-Pin (JETEC No. B8-11),
 or Medium-Shell Octal 5-Pin (JETEC No. B5-15)


Basing Designation for BOTTOM VIEW 5T

Pin 1 - No Connection

Pin 2 - Filament

Pin 3 - Same as Pin 1

Pin 4 - Plate No. 2




Pin 5 - Same as Pin 1

Pin 6 - Plate No. 1

Pin 7 - Same as Pin 1

Pin 8 - Filament

MAXIMUM RATINGS, TYPICAL OPERATION, and CURVES
 for Type 5AS4 are the same as those shown for Type 5U4-GB

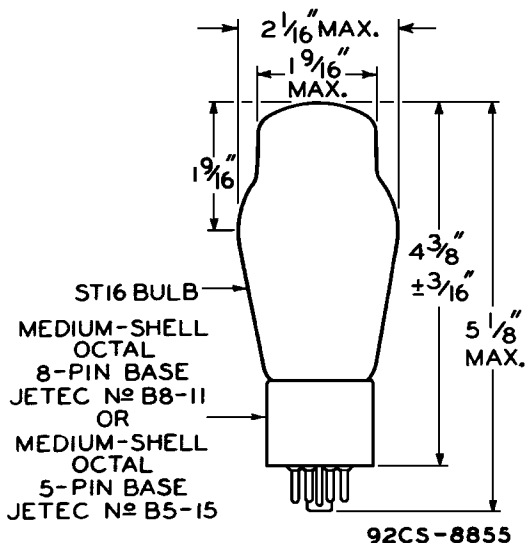

92CS-8855