

CLASS B TWIN AMPLIFIER

Heater	Coated Unipotential Cathode		
Voltage	6.3	a-c or d-c volts	
Current	0.8	amp.	
Maximum Overall Length		4-11/16"	
Maximum Diameter		1-13/16"	
Bulb		ST-14	
Base		Medium 7-Pin	
Pin 1-Heater	(3)	(4)	Pin 5-Grid (Triode T_1)
Pin 2-Plate (Triode T_2)	(2)	(5)	Pin 6-Plate (Triode T_1)
Pin 3-Grid (Triode T_2)	(1)	(6)	Pin 7-Heater
Pin 4-Cathode	(7)		
BOTTOM VIEW			

For convenience, one triode unit is identified as T_1 , the other as T_2 .

For additional curves and data, see Types 6N7 and 53, and the RESISTANCE-COUPLED AMPLIFIER CHART. The operating conditions and characteristics of the 6A6 are identical with those of the 6N7 and 53.

← Indicates a change

6A6




Cunningham
Radiotron



RCA-6A6

AVERAGE PLATE CHARACTERISTICS
CLASS A OPERATION - EACH TRIODE UNIT

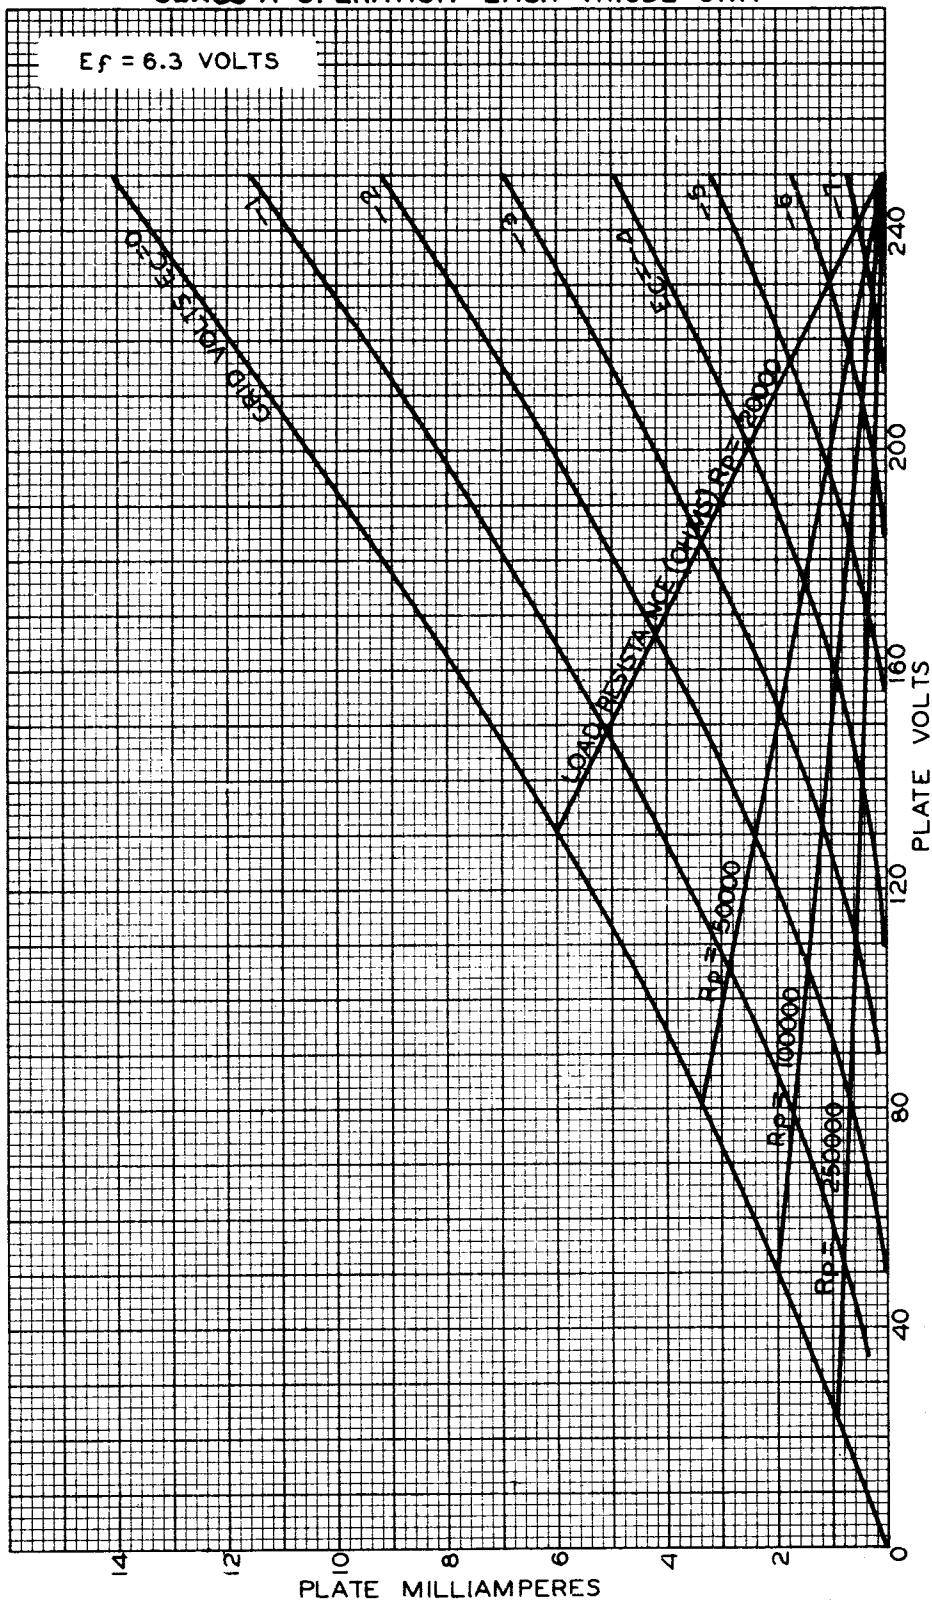

FEB. 5, 1935

RCA RADIOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-4375