



6AK5

6AK5

SHARP-CUTOFF PENTODE

7-PIN MINIATURE TYPE

*Useful at frequencies up to 400 Mc***GENERAL DATA****Electrical:**

Heater, for Unipotential Cathode:

Voltage. 6.3 ac or dc volts

Current. 0.175 amp

Direct Interelectrode Capacitances:

	<i>Without External Shield</i>	<i>With External Shield⁰</i>	
Grid No.1 to plate	0.03 max.	0.02 max.	μf
Grid No.1 to cathode & grid No.3 & internal shield, grid No.2, and heater	4	4	μf
Plate to cathode & grid No.3 & internal shield, grid No.2, and heater	2.1	2.8	μf

Characteristics, Class A₁ Amplifier:

Plate Voltage.	120	180	volts
Grid-No.2 (Screen) Voltage	120	120	volts
Cathode-Bias Resistor.	180	180	ohms
Plate Resistance (Approx.)	0.30	0.50	megohm
Transconductance	5000	5100	μmhos
Plate Current.	7.5	7.7	ma
Grid-No.2 Current.	2.5	2.4	ma
Grid-No.1 Voltage (Approx.) for plate current of 10 μamp	-8.5	-8.5	volts


Mechanical:

Mounting Position.	Any
Maximum Overall Length	1-3/4"
Maximum Seated Length.	1-1/2"
Length, Base Seat to Bulb Top (Excluding tip).	1-1/8" $\pm$ 3/32"
Maximum Diameter	3/4"
Dimensional Outline.	See General Section
Bulb	T-5-1/2
Base	Small-Button Miniature 7-Pin (JETEC No.E7-1)
Basing Designation for BOTTOM VIEW	7BD

Pin 1-Grid No.1

Pin 2-Cathode,
Grid No.3,
Internal
Shield

Pin 3-Heater



Pin 4-Heater

Pin 5-Plate

Pin 6-Grid No.2

Pin 7-Same as
Pin 2⁰ With external shield JETEC NO.316 connected to cathode.

← Indicates a change.

SEPT. 1, 1955

TUBE DIVISION

DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6AK5



6AK5

SHARP-CUTOFF PENTODE

AMPLIFIER - Class A₁

→ Maximum Ratings, Design-Center Values:

PLATE VOLTAGE.	180 max.	volts
GRID-No.2 (SCREEN) SUPPLY VOLTAGE.	180 max.	volts
GRID-No.2 VOLTAGE.	<i>See Grid-No.2 Input Rating Chart at front of Receiving Tube Section</i>	
GRID-No.1 (CONTROL-GRID) VOLTAGE:		
Positive bias value.	0 max.	volts
PLATE DISSIPATION.	1.7 max.	watts
GRID-No.2 INPUT:		
For grid-No.2 voltages up to 90 volts. .	0.5 max.	watt
For grid-No.2 voltages between 90 and 180 volts.	<i>See Grid-No.2 Input Rating Chart at front of Receiving Tube Section</i>	
CATHODE CURRENT.	18 max.	ma
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to catnode.	120 max.	volts
Heater positive with respect to cathode.	120 max.	volts

→ Indicates a change.

SEPT. 1, 1955

TUBE DIVISION

DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY




6AK5

AVERAGE PLATE CHARACTERISTICS PENTODE CONNECTION

6AK5

$E_f = 6.3$ VOLTS

SCREEN VOLTS = 120

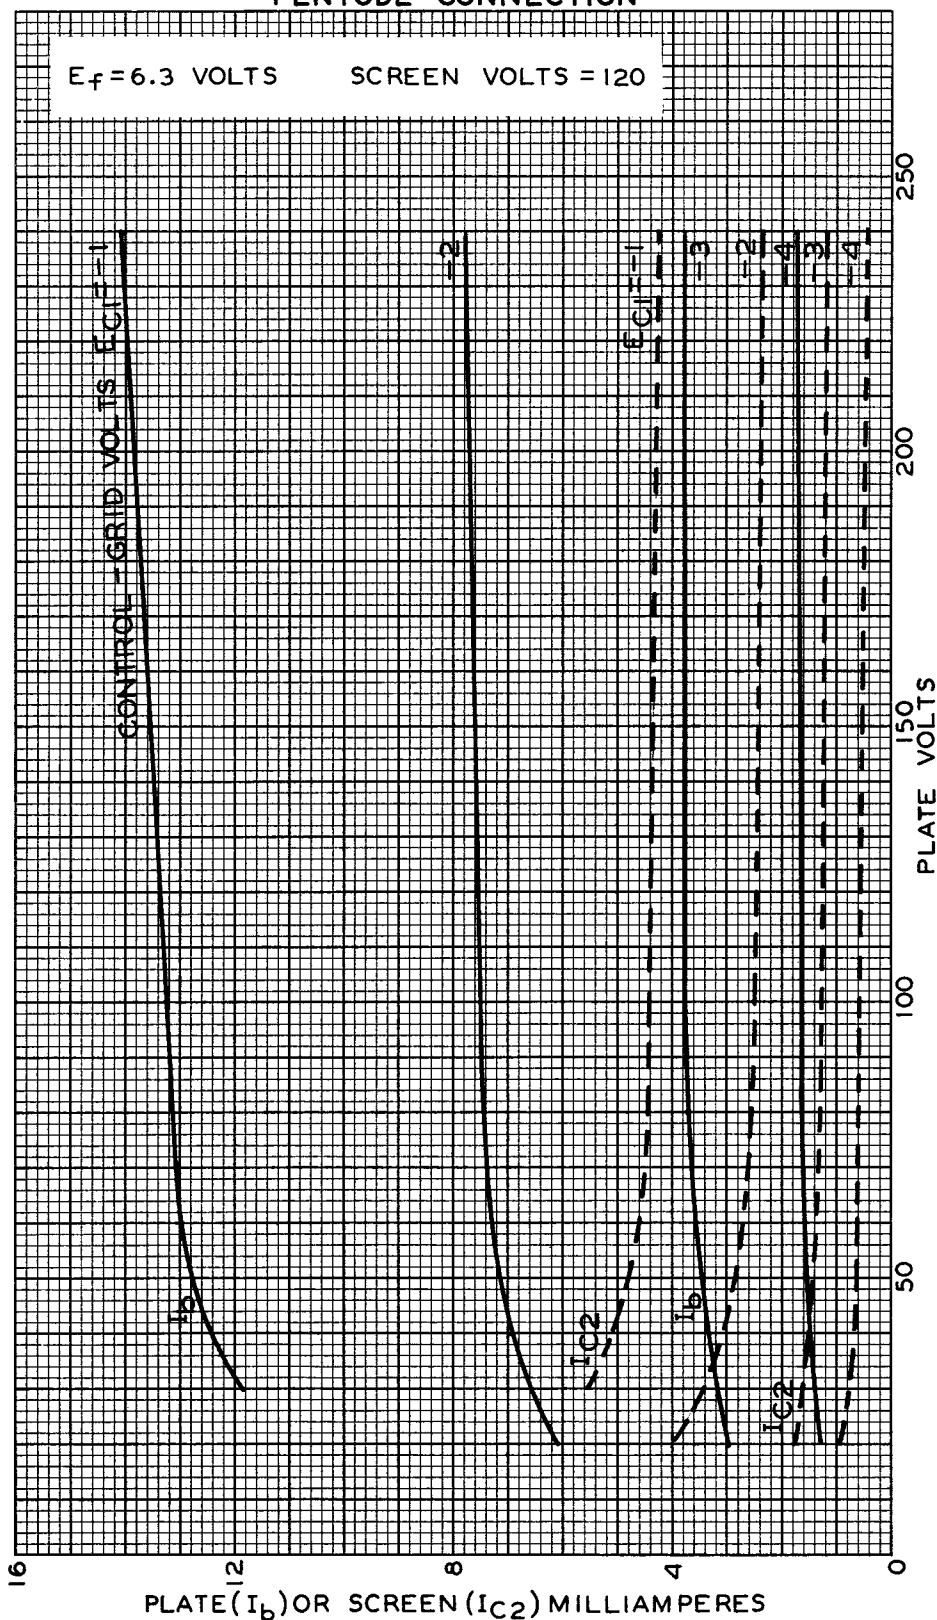

FEB. 15, 1945


RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6504

6AK5



6AK5

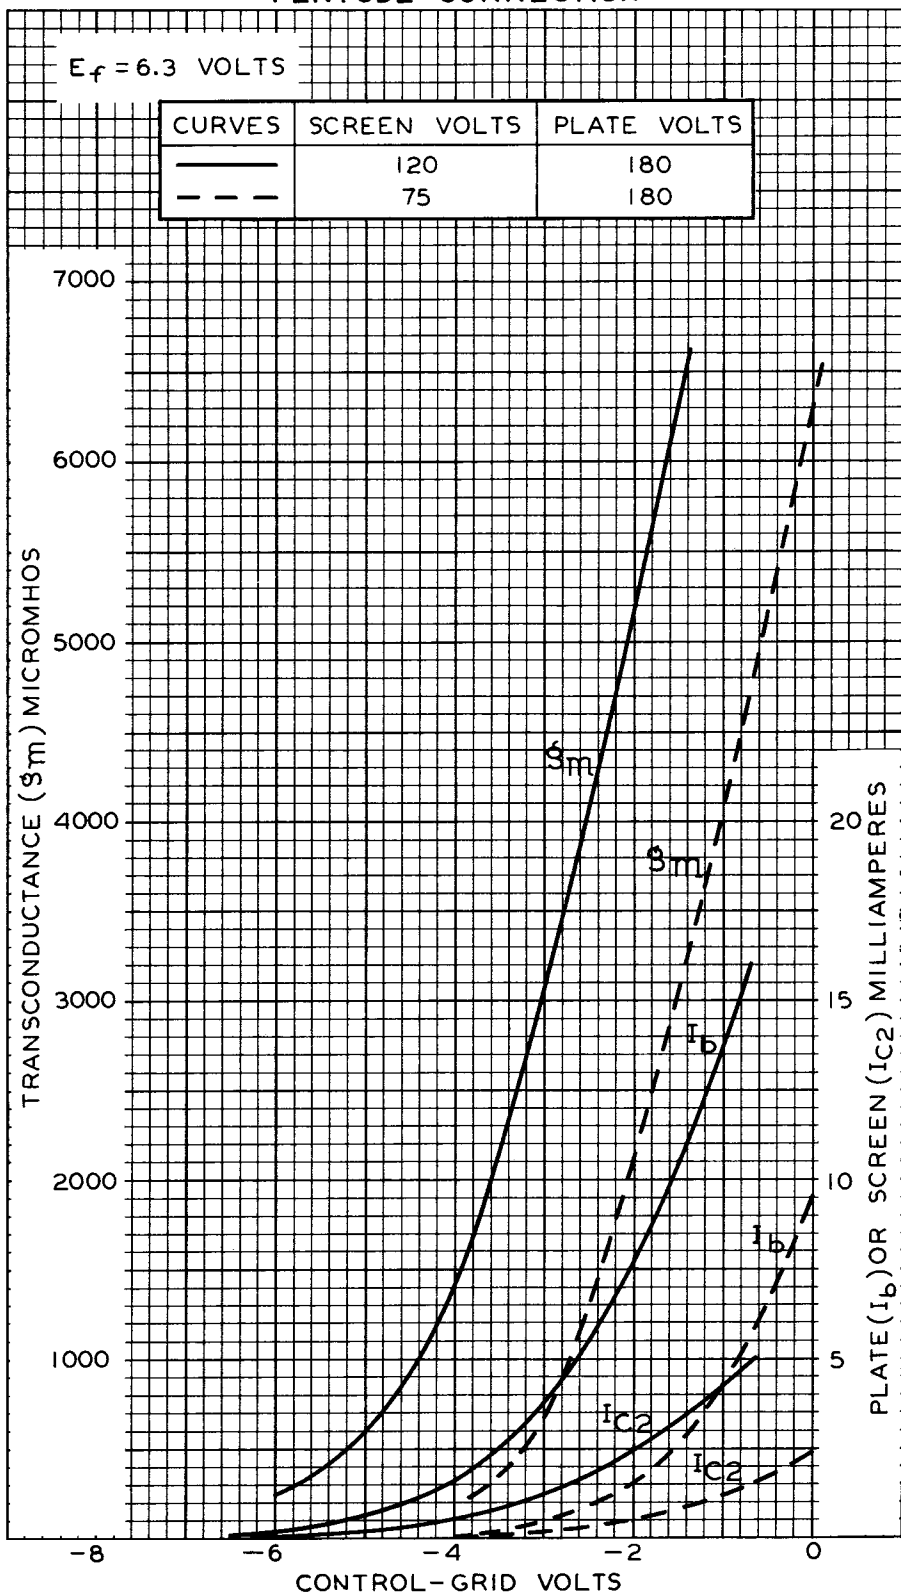AVERAGE CHARACTERISTICS
PENTODE CONNECTION

FEB. 19, 1945

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6505