



6AS6

6AS6

SHARP-CUTOFF PENTODE

MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage. 6.3 ac or dc volts

Current. 0.175 amp

Direct Interelectrode Capacitances:

	Without Ex- ternal Shield	With External Shield No. 316	
Grid No.1 to Plate . .	0.025 max.	0.02 max.	μf
Input.	3.9	4.0	μf
Output	2.2	3.0	μf
Grid No.1 to Grid No.3. . . .	0.15 max.	0.15 max.	μf
Grid No.3 to Plate . .	0.7 max.	0.7 max.	μf
Grid No.3 to All Other Electrodes . .	3.3	3.4	μf

Mechanical:

Mounting Position. Any

Maximum Overall Length 1-3/4"

Maximum Seated Length. 1-1/2"

Length, Base Seat to Bulb Top (Excluding tip). . 1-1/8" $\pm$ 3/32"

Maximum Diameter 3/4"

Bulb T-5-1/2

Base Small-Button Miniature 7-Pin


Basing Designation for BOTTOM VIEW 7CM1

Pin 1-Grid No.1

Pin 2-Cathode

Pin 3-Heater

Pin 4-Heater



Pin 5-Plate

Pin 6-Grid No.2

Pin 7-Grid No.3

AMPLIFIER - Class A₁

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE.	180 max.	volts
GRID-No.3 VOLTAGE.	27 max.	volts
GRID-No.2 VOLTAGE.	140 max.	volts
CATHODE CURRENT.	18 max.	ma
PLATE DISSIPATION.	1.7 max.	watts
GRID-No.2 INPUT.	0.75 max.	watt
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode. .	90 max.	volts
Heater positive with respect to cathode. .	90 max.	volts
BULB TEMPERATURE (At hottest point on bulb surface).	120 max.	°C

Characteristics:

Plate Voltage.	120	120	volts
------------------------	-----	-----	-------

FEB. 1, 1950

TUBE DEPARTMENT

TENTATIVE DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6AS6



6AS6

SHARP-CUTOFF PENTODE

Grid-No.3 Voltage.	-3	0	volts
Grid-No.2 Voltage.	120	120	volts
Grid-No.1 Voltage.	-2	-2	volts
Plate Resistance (Approx.)	-	0.15	megohm
Transconductance, Grid No.1 to Plate. . . .	1850	3200	μ mhos
Transconductance, Grid No.3 to Plate. . . .	810	470	μ mhos
Plate Current.	3.6	5.2	ma
Max. Plate Current for Grid-No.1 Volts = -10. . . .	-	100	μ amp
Max. Plate Current for Grid-No.3 Volts = -15. . . .	-	20	μ amp
Grid-No.2 Current.	4.8	3.5	ma

FEB. 1, 1950

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


TENTATIVE DATA



6AS6

6AS6

AVERAGE PLATE CHARACTERISTICS

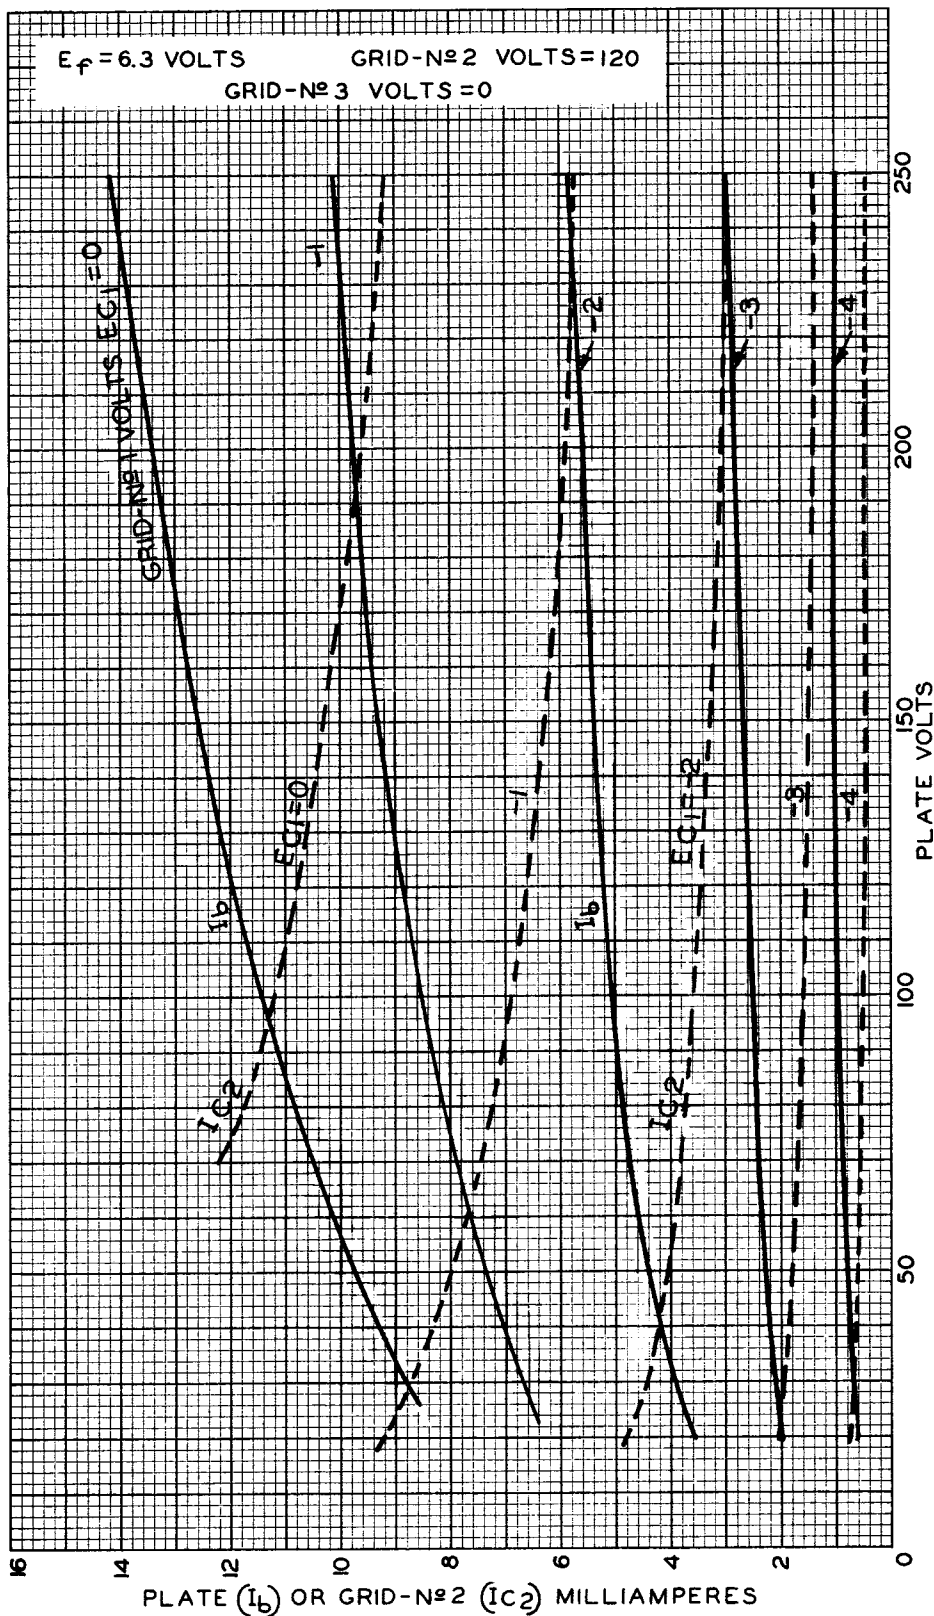

NOV. 4, 1949

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-7408

6AS6



6AS6

AVERAGE CHARACTERISTICS

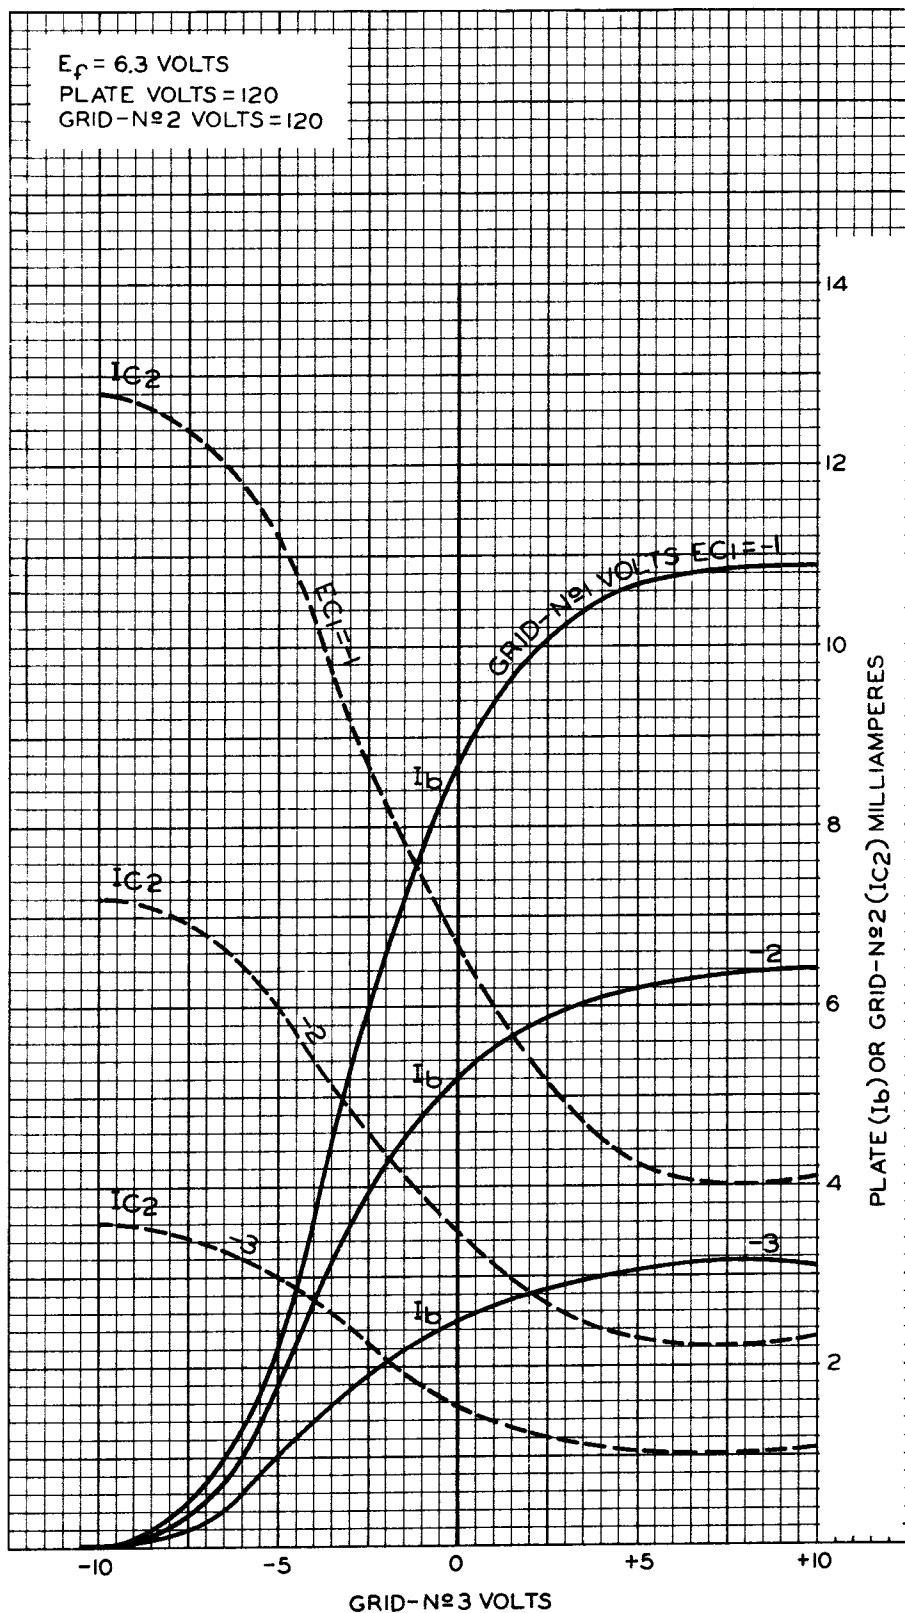

NOV. 9, 1949

 TUBE DEPARTMENT
 RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-7403



6AS6

6AS6

AVERAGE CHARACTERISTICS

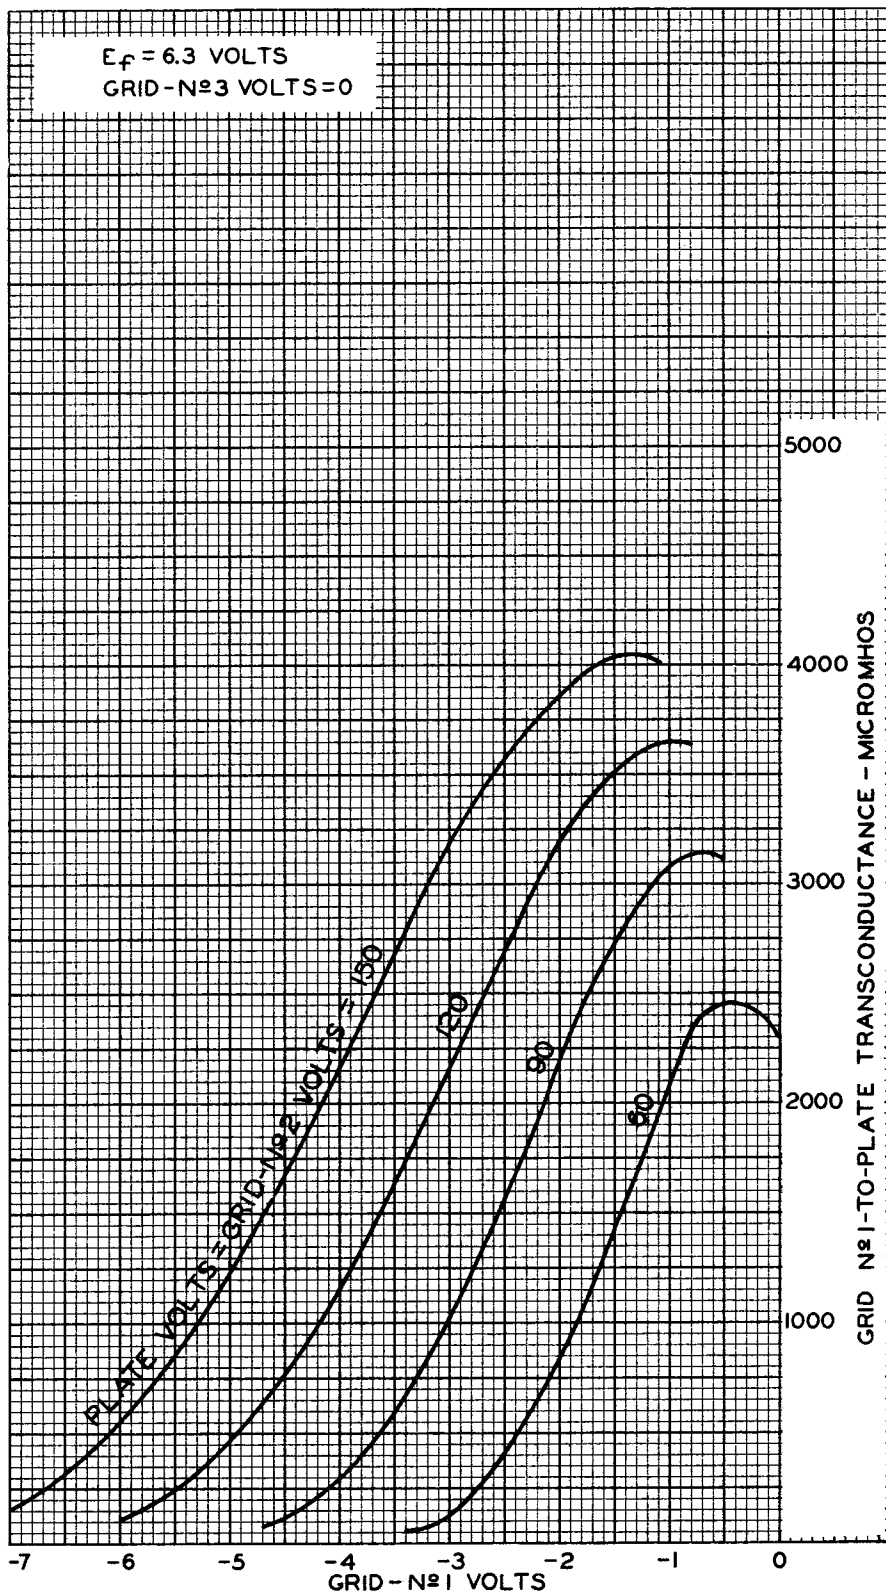

NOV. 4, 1949

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7401

6AS6




6AS6

AVERAGE CHARACTERISTICS

$E_f = 6.3$ VOLTS
GRID-Nº3 VOLTS=0

CURVES		PLATE AND GRID-Nº2 VOLTS
I_b —	I_{C2} - -	
1	A	60
2	B	90
3	C	120
4	D	150

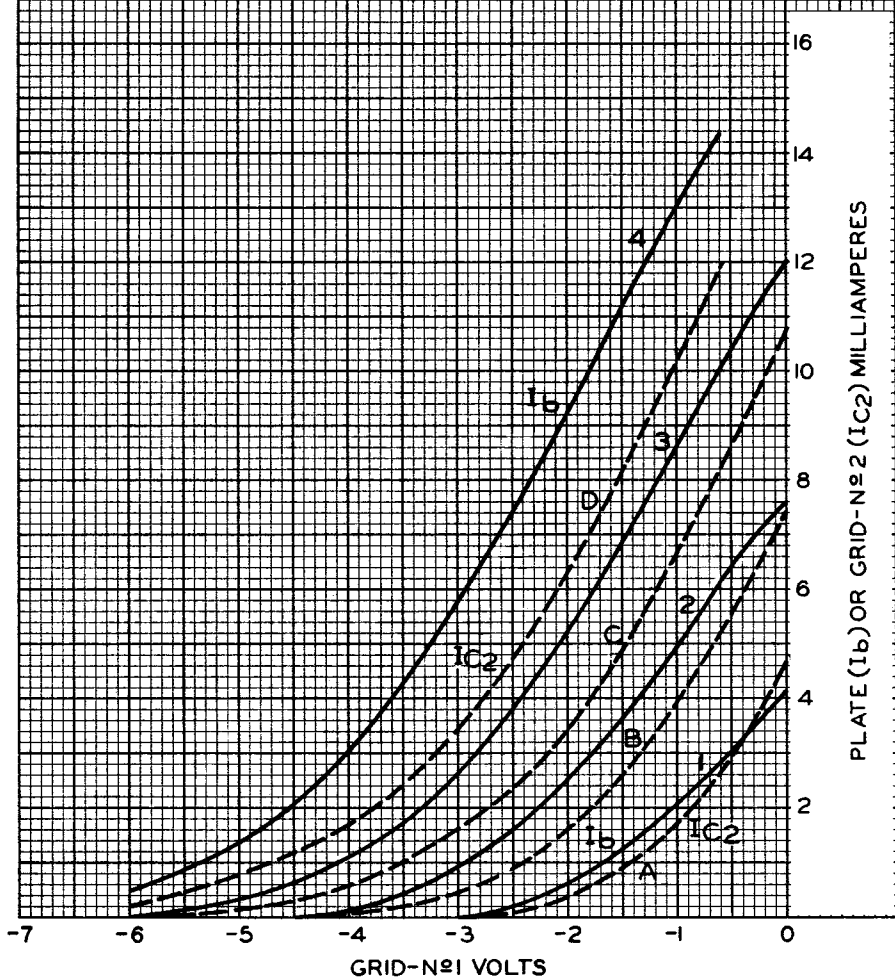

NOV. 7, 1949

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7402



6AS6

6AS6

AVERAGE CHARACTERISTICS

