



6BZ6

6BZ6

SEMIREMOTE-CUTOFF PENTODE

7-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC). $6.3 \pm 10\%$ volts

Current 0.3 amp

Direct Interelectrode Capacitances:

	<i>Without External Shield</i>	<i>With External Shield⁰</i>	
Grid No.1 to plate.	0.025 max.	0.015 max.	μf
Grid No.1 to cathode, grid No.3 & internal shield, grid No.2, and heater	7	7	μf
Plate to cathode, grid No.3 & internal shield, grid No.2, and heater.	2	3	μf


Characteristics, Class A₁ Amplifier:

Plate Supply Voltage.	125	volts
Grid No.3	<i>Connected to cathode at socket</i>	
Grid-No.2 Supply Voltage.	125	volts
Cathode Resistor.	56	ohms
Plate Resistance (Approx.).	0.26	megohm
Transconductance.	8000	μmhos
Plate Current	14	ma
Grid-No.2 Current	3.6	ma
Grid-No.1 Voltage (Approx.) for trans- conductance (μmhos) = 50.	-19	volts
Grid-No.1 Voltage (Approx.) for trans- conductance (μmhos) = 700 and cathode resistor (ohms) = 0	-4.5	volts

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2-1/8"
Maximum Seated Length	1-7/8"
Length, Base Seat to Bulb Top (Excluding tip).	1-1/2" $\pm$ 3/32"
Diameter.	0.650" to 0.750"
Dimensional Outline	<i>See General Section</i>
Bulb.	T5-1/2
Base.	Small-Button Miniature 7-Pin (JEDEC No.E7-1)
Basing Designation for BOTTOM VIEW.	7CM

Pin 1-Grid No.1
Pin 2-Cathode
Pin 3-Heater
Pin 4-Heater
Pin 5-Plate



Pin 6-Grid No.2
Pin 7-Grid No.3,
Internal
Shield

← Indicates a change.

6BZ6



6BZ6

SEMIREMOTE-CUTOFF PENTODE

AMPLIFIER — Class A₁→ **Maximum Ratings, Design-Maximum Values:**

PLATE VOLTAGE	330	max.	volts
GRID-No.3 (SUPPRESSOR-GRID) VOLTAGE . .	0	max.	volts
GRID-No.2 (SCREEN-GRID) SUPPLY VOLTAGE.	330	max.	volts
GRID-No.2 VOLTAGE	<i>See Grid-No.2 Input Rating Chart at front of Receiving Tube Section</i>		
GRID-No.1 (CONTROL-GRID) VOLTAGE:			
Positive-bias value	0	max.	volts
GRID-No.2 INPUT:			
For grid-No.2 voltages up to			
165 volts	0.55	max.	watt
For grid-No.2 voltages between 165			
and 330 volts	<i>See Grid-No.2 Input Rating Chart at front of Receiving Tube Section</i>		
PLATE DISSIPATION	2.3	max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with			
respect to cathode.	200	max.	volts
Heater positive with			
respect to cathode.	200 [▲]	max.	volts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:			
For fixed-bias operation.	0.25	max.	megohm
For cathode-bias operation.	1	max.	megohm

^O With external shield JEDEC No.316 connected to cathode.

[▲] The dc component must not exceed 100 volts.


→ Indicates a change.



6BZ6

6BZ6

AVERAGE CHARACTERISTICS

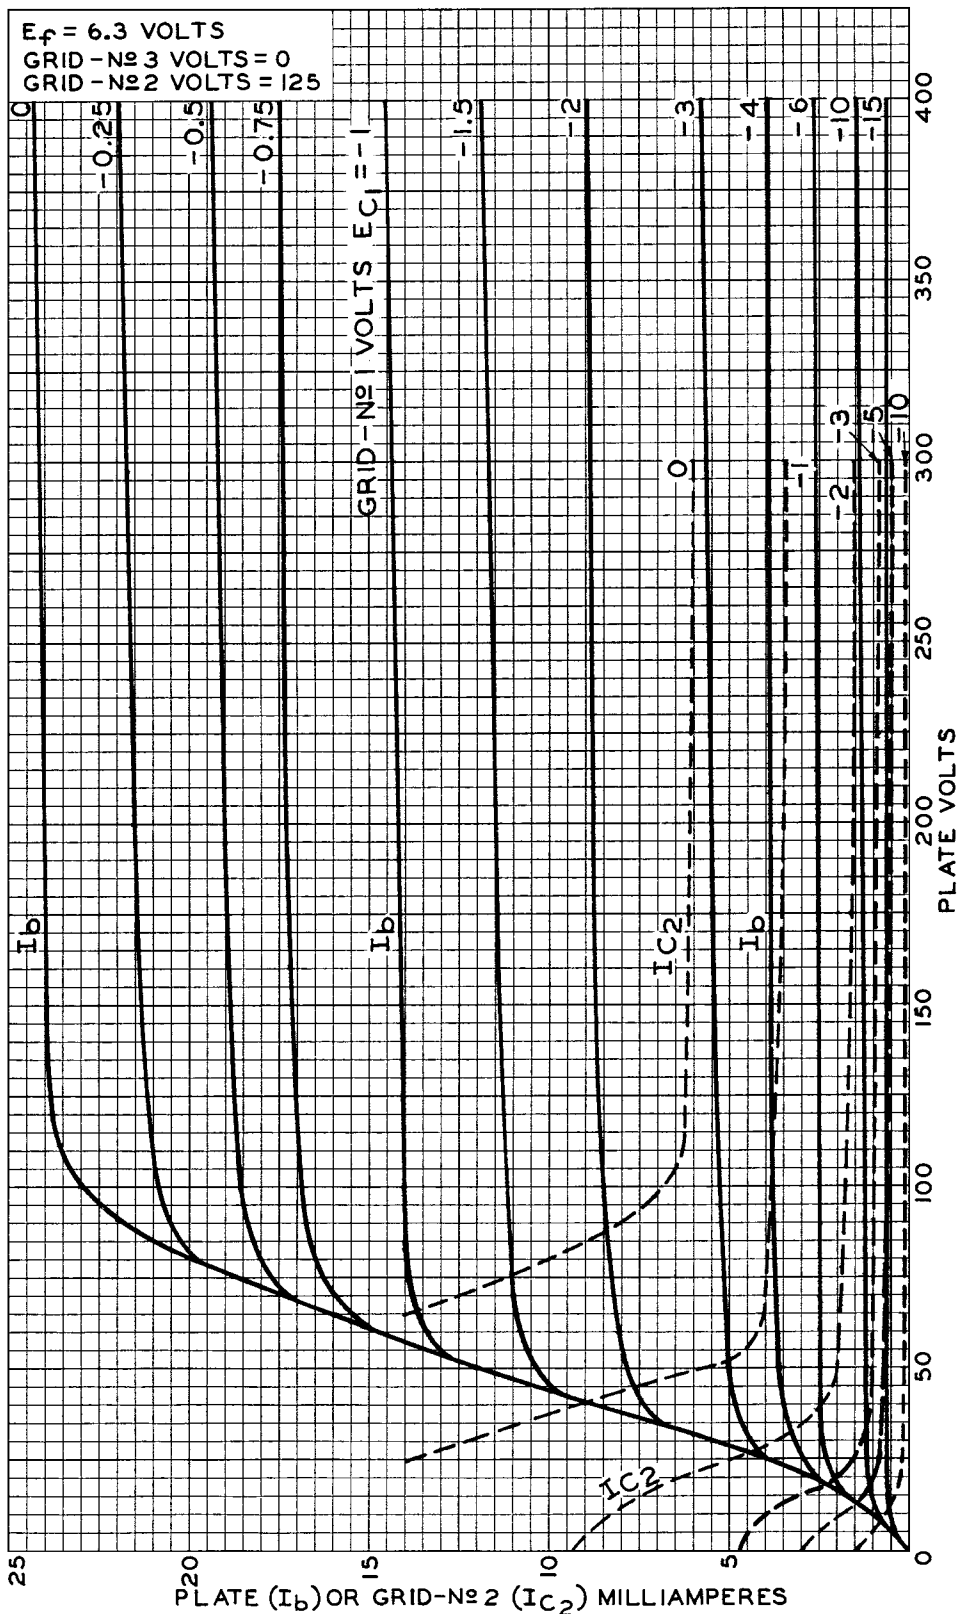

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-8508R2

6BZ6



6BZ6

AVERAGE CHARACTERISTICS

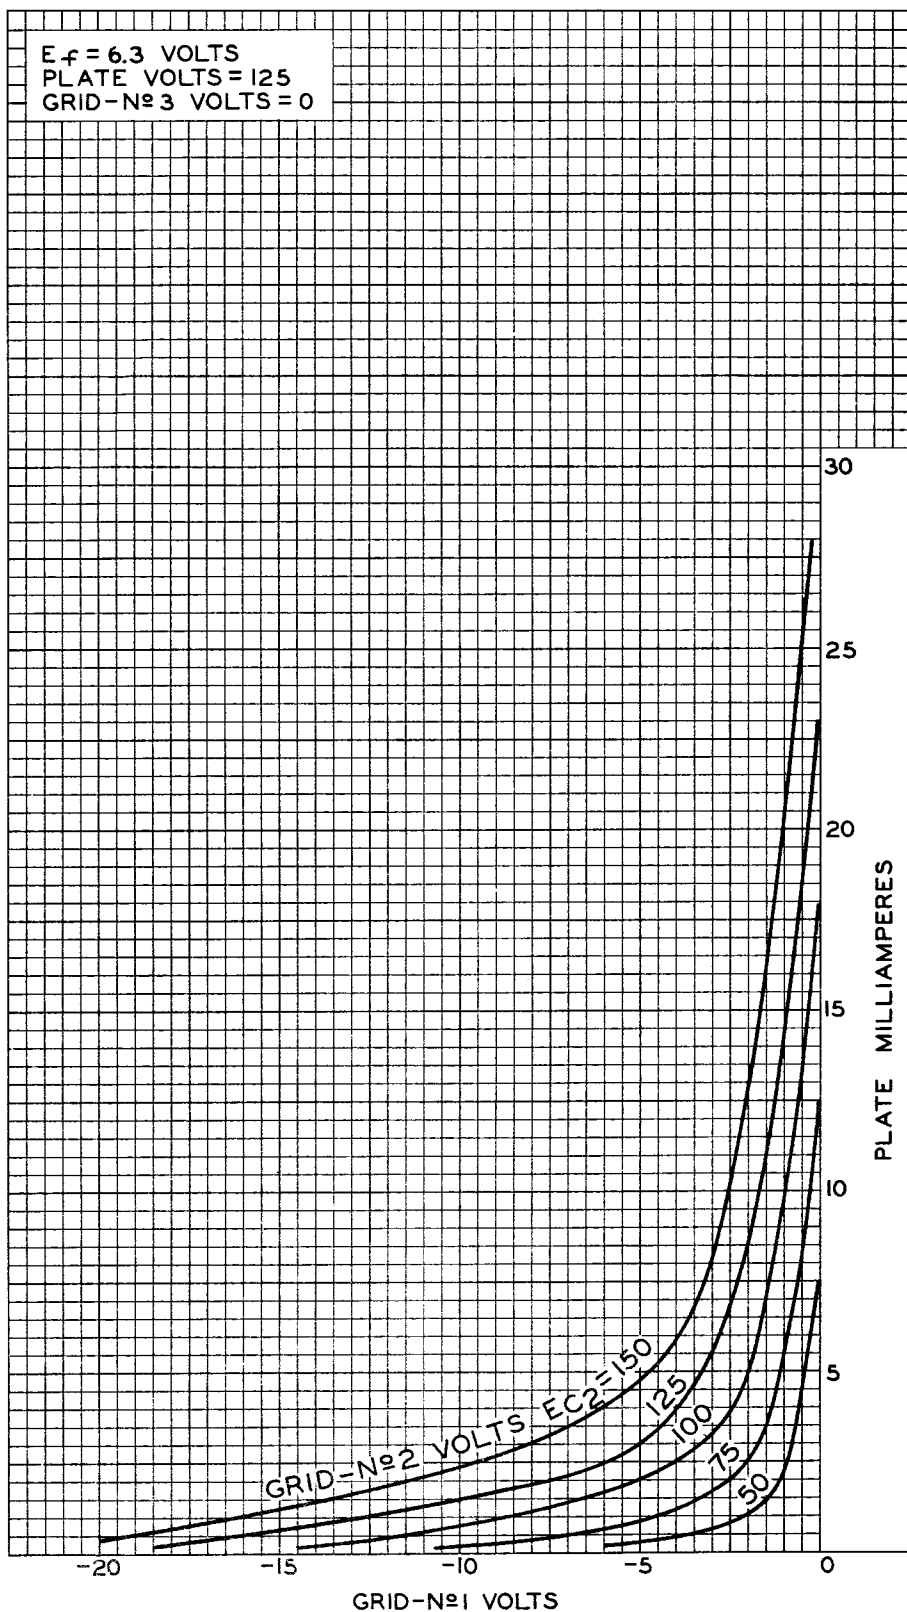

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-948IRI



6BZ6

6BZ6

AVERAGE CHARACTERISTICS

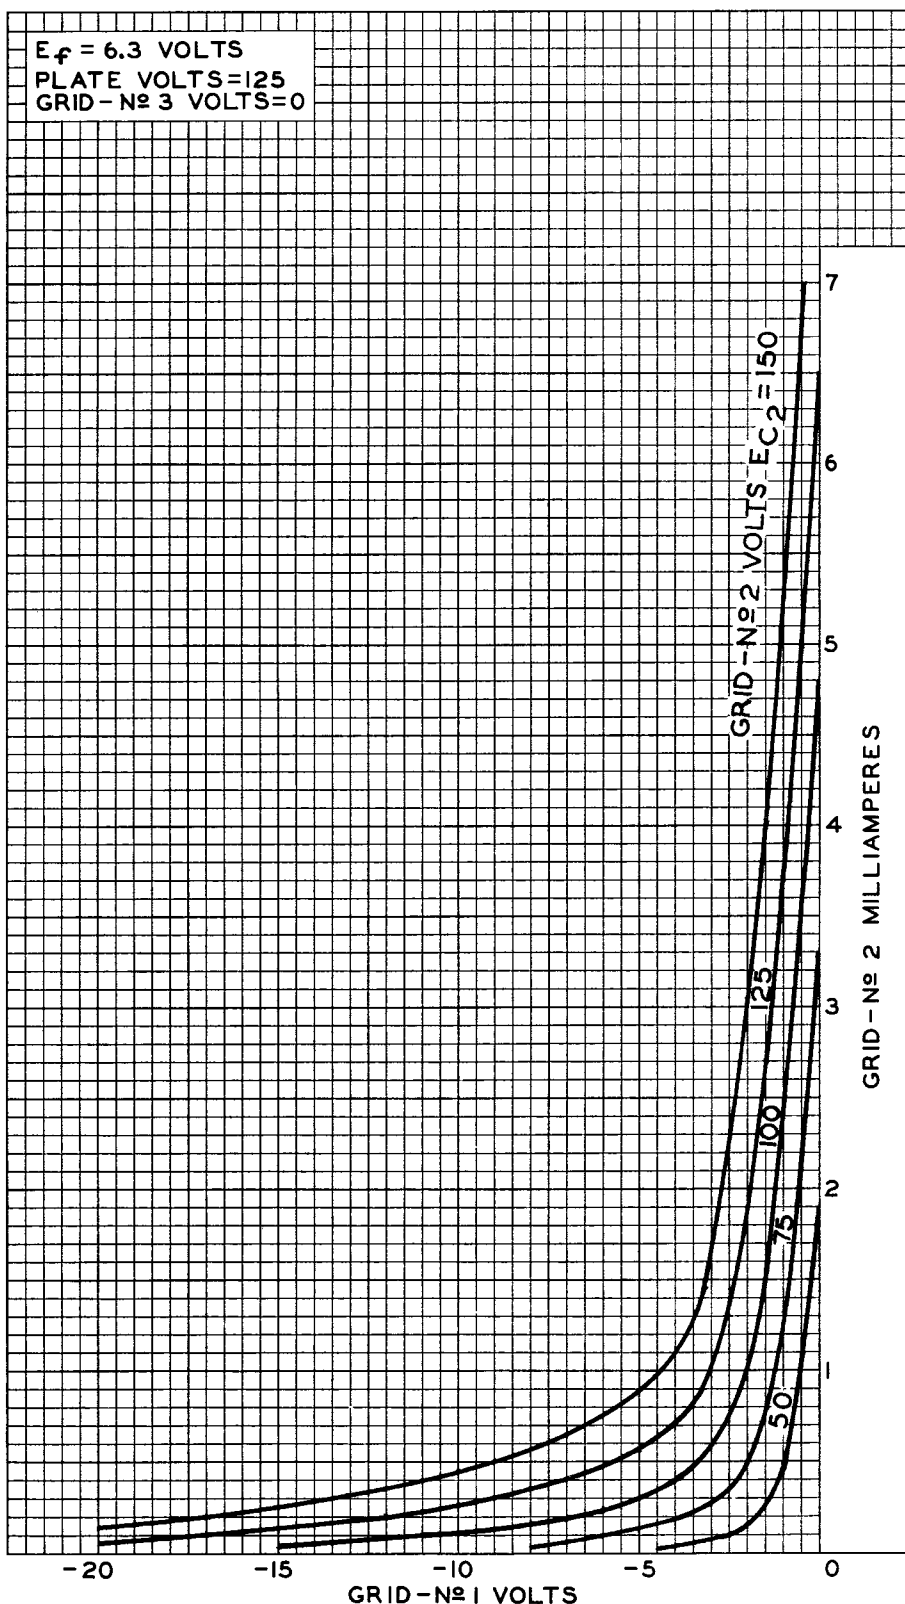

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-9485R1

6BZ6



6BZ6

AVERAGE CHARACTERISTICS

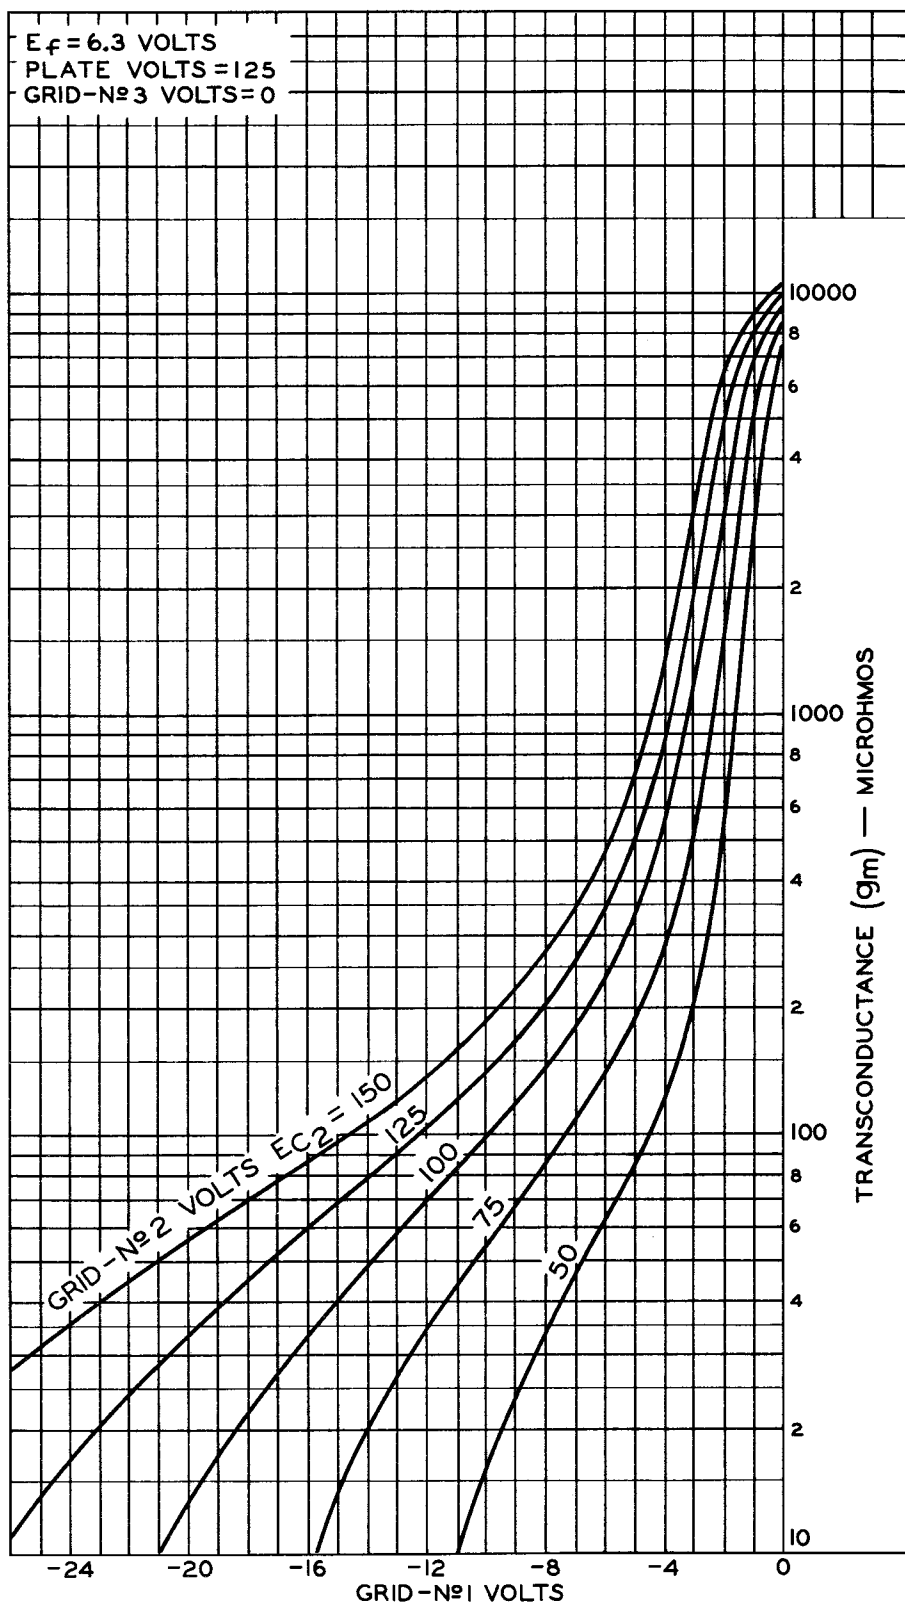

ELECTRON TUBE DIVISION

92CM-8509R1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY