



6C4

6C4

MEDIUM-MU TRIODE*For use in FM and other HF circuits***GENERAL DATA****Electrical:**

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts

Current 0.15 amp

Direct Interelectrode Capacitances:^oGrid to plate 1.6 μf Grid to cathode and heater 1.8 μf Plate to cathode and heater 1.3 μf **Mechanical:**

Mounting Position Any

Maximum Overall Length 2-1/8" ←

Maximum Seated Length 1-7/8" ←

Length, Base Seat to Bulb Top (Excluding tip) . 1-1/2" $\pm$ 3/32" ←

Maximum Diameter 3/4"

Bulb T-5-1/2

Base Small-Button Miniature 7-Pin (JETEC No. E7-1) ←


Basing Designation for BOTTOM VIEW 6BG

Pin 1—Plate

Pin 2—Internal Con-
nection

Do Not Use

Pin 3—Heater



Pin 4—Heater

Pin 5—Plate

Pin 6—Grid

Pin 7—Cathode

AMPLIFIER—Class A₁**Maximum Ratings, Design-Center Values:**

PLATE VOLTAGE 300 max. volts

PLATE DISSIPATION 3.5 max. watts ←

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode . 200 max. volts

Heater positive with respect to cathode . 200[■] max. volts**Characteristics:**

Plate Voltage 100 250 volts

Grid Voltage 0 -8.5 volts

Amplification Factor 19.5 17

Plate Resistance (Approx.) 6250 7700 ohms

Transconductance 3100 2200 μmhos

Plate Current 11.8 10.5 ma

Maximum Circuit Values: ←

Grid-Circuit Resistance:

For fixed-bias operation 0.25 max. megohm

For cathode-bias operation 1.0 max. megohm

^o With no external shield.[■] See next page.

← Indicates a change.

NOV. 5, 1954

TUBE DIVISION

DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6CA



6C4

MEDIUM-MU TRIODE

→ Typical Operation as Resistance-Coupled Amplifier:

See *RESISTANCE-COUPLED AMPLIFIER CHART No. 10*
at front of this Section.

RF POWER AMPLIFIER & OSCILLATOR—Class C Telegraphy

Maximum Ratings, Design-Center Values:

DC PLATE VOLTAGE	300 max.	volts
DC GRID VOLTAGE	-50 max.	volts
DC PLATE CURRENT	25 max.	ma
DC GRID CURRENT	8 max.	ma
PLATE DISSIPATION	5 max.	watts

→ PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode .	200 max.	volts
Heater positive with respect to cathode .	200 [■] max.	volts

Typical Operation at Frequencies up to 50 Mc:*

DC Plate Voltage	300	volts
DC Grid Voltage	-27	volts
DC Plate Current	25	ma
DC Grid Current (Approx.)	7	ma
Driving Power (Approx.)	0.35	watt
Useful Power Output (Approx.)	5.5	watts

■ The dc component must not exceed 100 volts.

● Approximately 2.5 watts can be obtained when the 6C4 is used at 150 Mc as an oscillator with grid resistor of 10000 ohms and maximum rated input.

→ indicates a change.



6C4

6C4

AVERAGE PLATE CHARACTERISTICS

$E_f = 6.3$ VOLTS

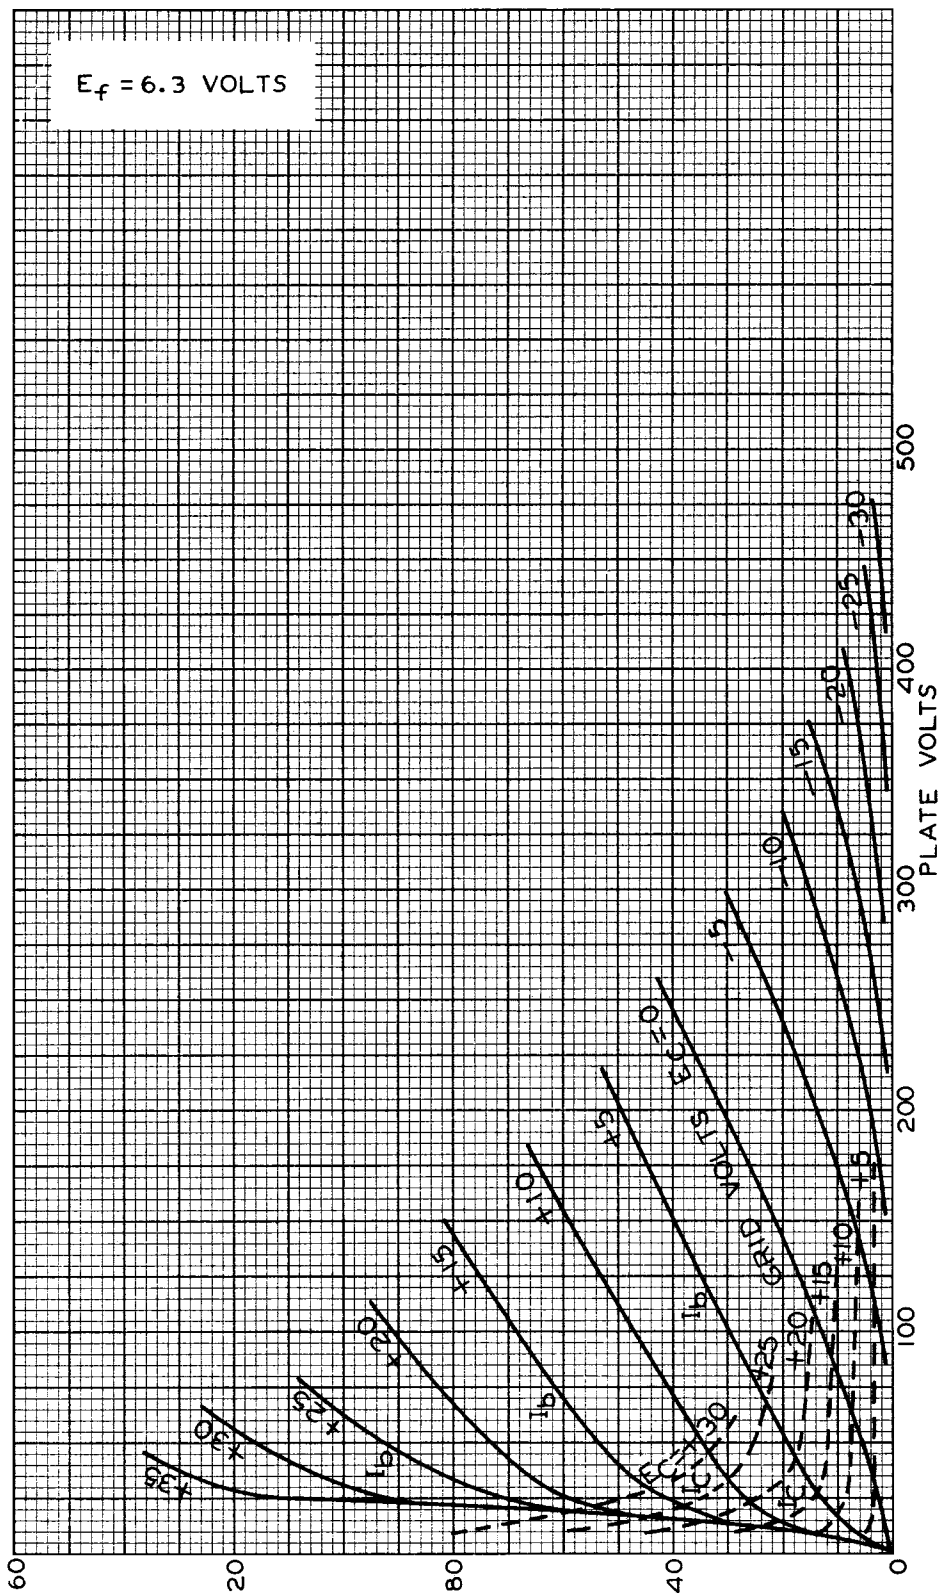


PLATE (I_b) OR GRID (I_c) MILLIAMPERES

MARCH 16, 1942

RCA RADOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.


92C- 6378

6C4



6C4

AVERAGE PLATE CHARACTERISTICS

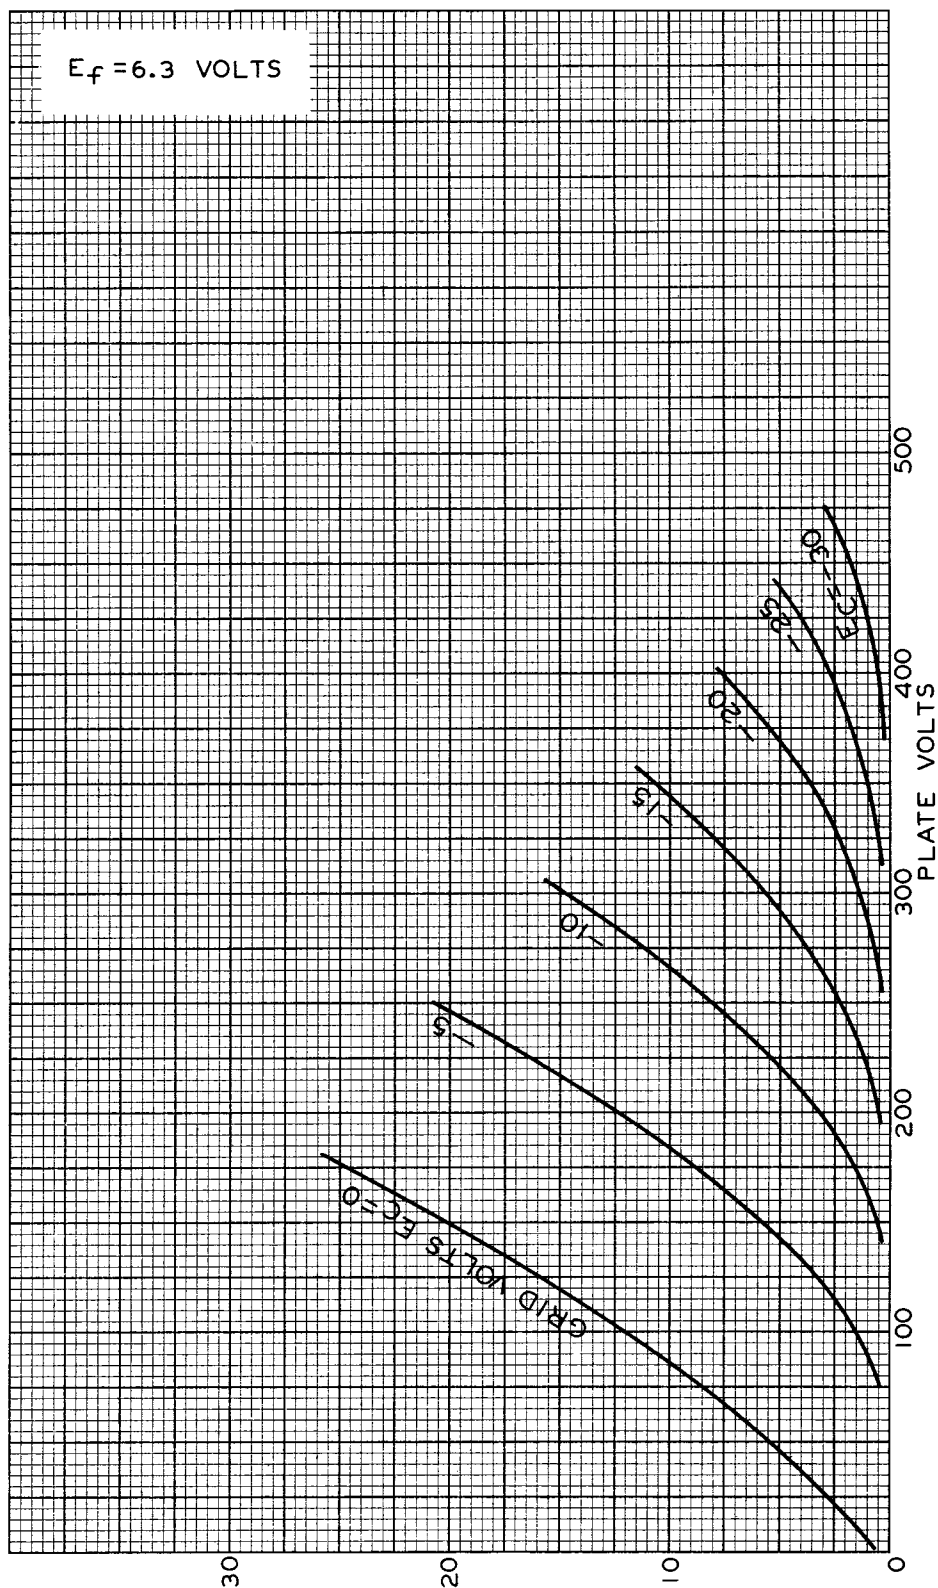

MARCH 14, 1942

RCA RADOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-6377