

Beam Power Tube

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC) $6.3 \pm 10\%$ volts
Current at 6.3 volts. 1.2 amp

Mu-Factor, Grid No.2 to Grid No.1

for plate volts = 150, grid-No.2
volts = 150, grid-No.1 volts = 22.5 . . . 4.5

Direct Interelectrode Capacitances

(Approx.):^a

Grid No.1 to plate. 0.5 $\mu\mu\text{f}$
Grid No.1 to cathode & grid No.3,
grid No.2, and heater 15 $\mu\mu\text{f}$
Plate to cathode & grid No.3,
grid No.2, and heater 7 $\mu\mu\text{f}$

Characteristics, Class A₁ Amplifier:

Plate Voltage 60 250 volts
Grid-No.2 Voltage 150 150 volts
Grid-No.1 Voltage 0 -22.5 volts
Plate Resistance (Approx.) - 20000 ohms
Transconductance. - 6600 μmhos
Plate Current 315^b 55 ma
Grid-No.2 Current 25^b 1.5 ma
Grid-No.1 Voltage (Approx.) for
grid-No.2 volts = 150, plate ma.
= 1, plate volts =
250 - -40 volts
5000. - -100 volts

Mechanical:

Operating Position. Any
Maximum Overall Length. 4-1/4"
Seated Length 3-1/2" $\pm$ 3/16"
Diameter. 1.438" to 1.562" ←
Bulb. T12
Cap Skirted Miniature (JEDEC No.C1-3)
Base. Short Medium-Shell Octal 7-Pin ←
with External Barriers, Style A, Arrangement 1
(JEDEC No.B7-111),
Short Medium-Shell Octal 7-Pin
with External Barriers, Style B, Arrangement 1
(JEDEC No.B7-119),
Short Medium-Shell Octal 6-Pin
With External Barriers, Style A, Arrangement 2
(JEDEC No.B6-148), or
Short Medium-Shell Octal 6-Pin
With External Barriers, Style B, Arrangement 2
(JEDEC No.B6-122)


← Indicates a change.



6DQ6-A

Basing Designation for BOTTOM VIEW. 6AM

Pin 1^c - No Connection
 Pin 2 - Heater
 Pin 3 - No Connection
 Pin 4 - Grid No.2



Pin 5 - Grid No.1
 Pin 7 - Heater
 Pin 8 - Cathode,
 Grid No.3
 Cap - Plate

HORIZONTAL-DEFLECTION AMPLIFIER

→ Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^d

DC PLATE-SUPPLY VOLTAGE	770	max.	volts
PEAK POSITIVE-PULSE PLATE VOLTAGE ^e	6000	max.	volts
PEAK NEGATIVE-PULSE PLATE VOLTAGE	1500	max.	volts
DC GRID-No.2 (SCREEN-GRID) VOLTAGE. . . .	220	max.	volts
PEAK NEGATIVE-PULSE GRID-No.1 VOLTAGE . .	330	max.	volts
CATHODE CURRENT:			
Peak.	540	max.	ma
Average	155	max.	ma
GRID-No.2 INPUT	3.6	max.	watts
PLATE DISSIPATION ^f	18	max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode.	200	max.	volts
Heater positive with respect to cathode.	200 ^g	max.	volts
BULB TEMPERATURE (At hottest point on bulb surface).	220	max.	°C

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For grid resistor-bias operation. 1 max. megohm

^a Without external shield.

^b This value can be measured by a method involving a recurrent wave form such that the maximum ratings of the tube will not be exceeded.

^c On the 6-pin bases, pin 1 as well as pin 6 is omitted.

^d As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission.

^e This rating is applicable where the duration of the voltage pulse does not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.


^f An adequate bias resistor or other means is required to protect the tube in the absence of excitation.

^g The dc component must not exceed 100 volts.

→ Indicates a change.



6DQ6-A

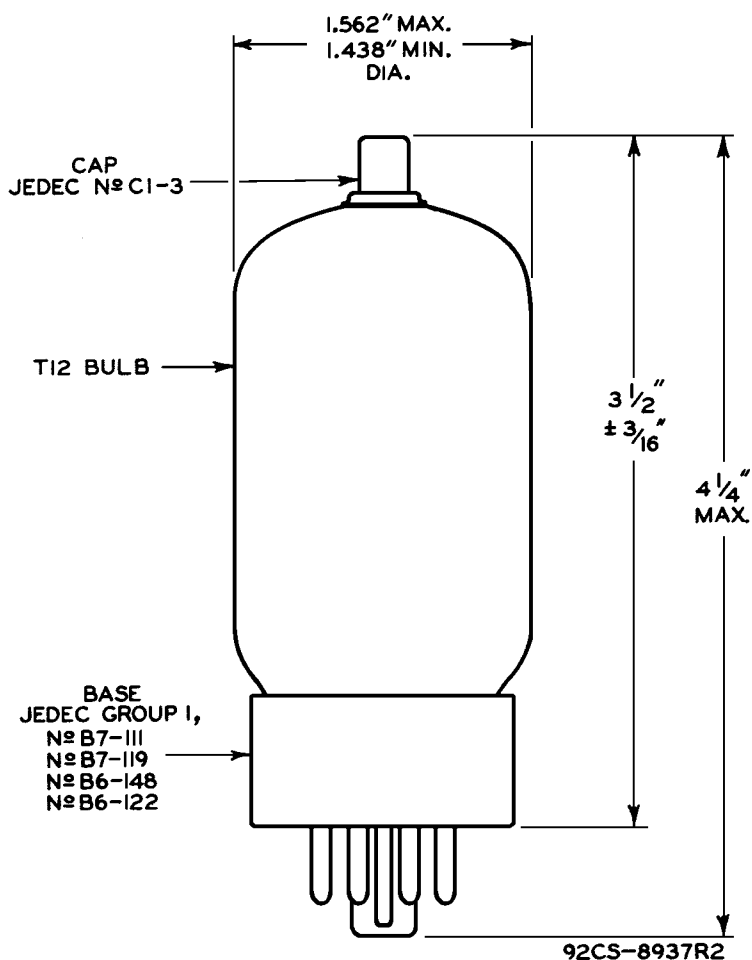




6DQ6-A

6DQ6-A

AVERAGE CHARACTERISTICS

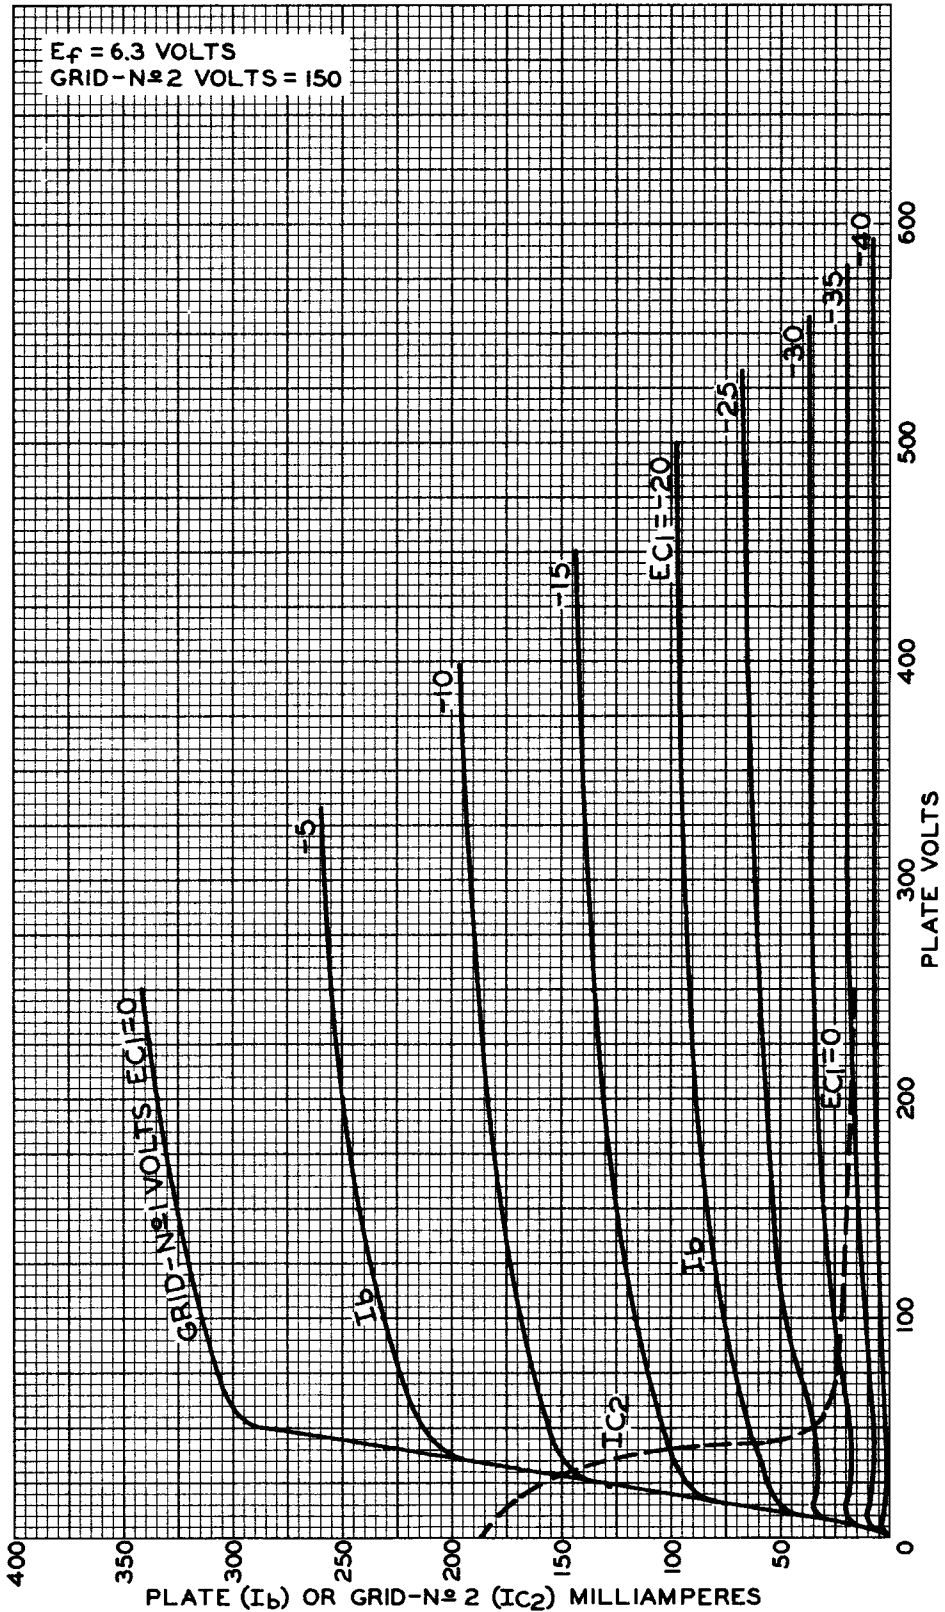

TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-8953