



6U5

INDICATOR TYPE WITH REMOTE-CUTOFF TRIODE UNIT

Electrical:

Heater, for Unipotential Cathode:


```

Voltage . . . . . 6.3 . . . . . ac or dc volts
Current . . . . . 0.3 . . . . . amp

```

Mechanical:

Mounting Position	Any
Maximum Overall Length	4-3/16"
Seated Length	3-3/8 ± 3/16"
Maximum Diameter	1-3/16"
Bulb	T-9
Base	Small-Shell Small 6-Pin (JETEC No. A6-7)
Basing Designation for BOTTOM VIEW	6R

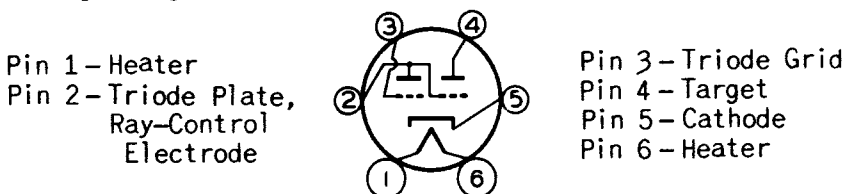

INDICATOR SERVICE

Maximum Ratings, Design-Center Values:

TRIODE-PLATE SUPPLY VOLTAGE	285 max.	volts
TARGET VOLTAGE	{ 285 max.	volts
	{ 125 min.	volts
TRIODE-PLATE DISSIPATION	1.0 max.	watt

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode .	90 max. volts
Heater positive with respect to cathode .	90 max. volts

Typical Operation:

Plate Supply and Target Voltage . . .	200	250	volts
Series Triode-Plate Resistor . . .	1	1	megohm
Target Current†			
for zero grid voltage	3	4	ma
Triode-Plate Current			
for zero grid voltage	0.19	0.24	ma
Triode-Grid Voltage (Approx.):			
For 0° shadow angle	-18.5	-22	volts
For 90° shadow angle	0	0	volts

† Subject to wide variations.

Refer to Type 6E5 for a discussion of the operation of the tube and also for the fundamental circuit.


← Indicates a change.

6U5



6U5

AVERAGE CONTROL CHARACTERISTICS

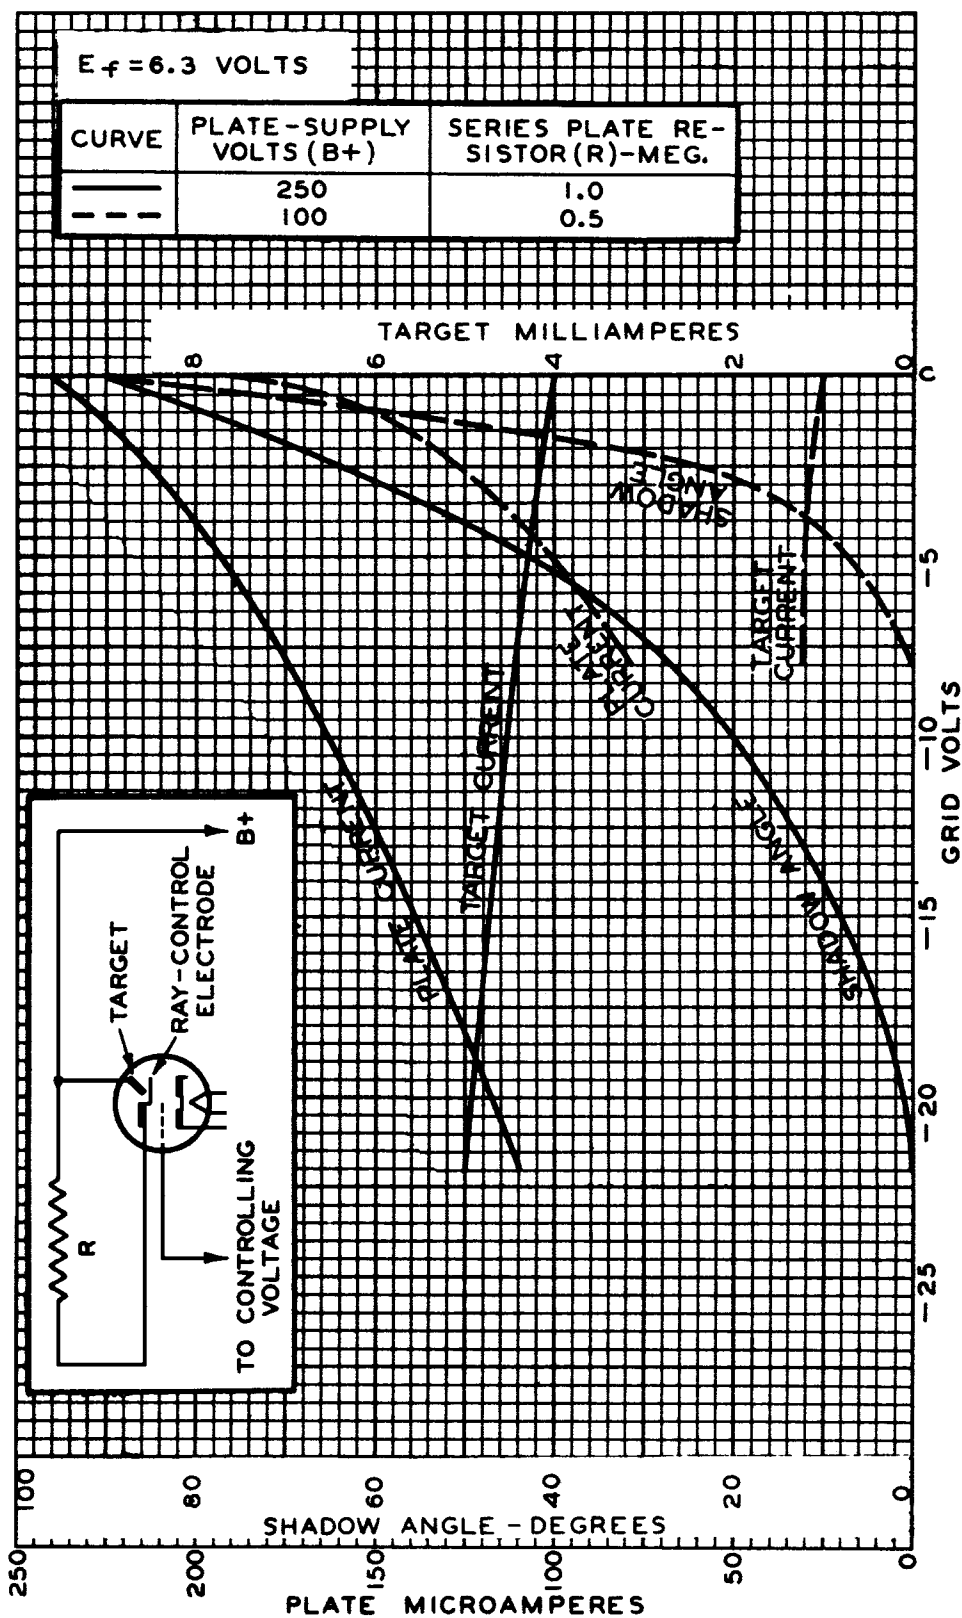

AUG. 9, 1954

TUBE DIVISION

92CM-4626R3

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY