

Medium-Mu Triode— Sharp-Cutoff Pentode

9-PIN MINIATURE TYPE

With Heater Having Controlled Warm-Up Time

GENERAL DATA

Electrical:

Heater, for Unipotential Cathodes:

Voltage (AC or DC)	6.3	volts
Current	0.45 ± 6%	amp
Warm-up time (Average)	11	sec

Direct Interelectrode Capacitances:

	<i>Without External Shield</i>	<i>With External Shield[▲]</i>	
Triode Unit:			
Grid to plate	1.8	1.8	μf
Grid to cathode and heater.	2.8	2.8	μf
Plate to cathode and heater.	1.5	2	μf
Pentode Unit:			
Grid No.1 to plate.	0.015 max.	0.007 max.	μf
Grid No.1 to cathode & grid No.3 & internal shield, grid No.2, and heater.	5	5	μf
Plate to cathode & grid No.3 & internal shield, grid No.2, and heater .	2.6	3.5	μf
Pentode grid No.1 to triode plate.	0.2 max.	0.2 max.	μf
Pentode plate to triode plate.	0.1 max.	0.02 max.	μf
Heater to cathode (Each unit)	3	3 [●]	μf

Characteristics, Class A₁ Amplifier:

	<i>Triode Unit</i>	<i>Pentode Unit</i>		
Plate Voltage	125	100	125	volts
Grid-No.2 Voltage	—	70	110	volts
Grid-No.1 Voltage	—1	—	—1	volt
Amplification Factor.	40	—	—	
Plate Resistance (Approx.)	5400	—	200000	ohms
Transconductance.	7500	5500	5000	μmhos
Plate Current	13.5	—	9.5	ma
Grid-No.2 Current	—	—	3.5	ma
Grid-No.1 Voltage (Approx.) for plate $\mu a = 20$	—9	—	—8	volts


← Indicates a change.



6U8-A

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2-3/16"
Maximum Seated Length.	1-15/16"
Length, Base Seat to Bulb Top (Excluding tip).	1-9/16" $\pm$ 3/32"
→ Diameter.	0.750" to 0.875"
Dimensional Outline.	See <i>General Section</i>
Bulb.	T6-1/2
Base.	Small-Button Noval 9-Pin (JEDEC No. E9-1)
Basing Designation for BOTTOM VIEW.	9AE
Pin 1 - Triode Plate	Pin 7 - Pentode
Pin 2 - Pentode	Cathode,
Grid No.1	Pentode
Pin 3 - Pentode	Grid No.3,
Grid No.2	Internal
Pin 4 - Heater	Shield
Pin 5 - Heater	Pin 8 - Triode Cathode
Pin 6 - Pentode Plate	Pin 9 - Triode Grid



AMPLIFIER — Class A₁

Maximum Ratings, Design-Maximum Values:

	Triode Unit	Pentode Unit	
PLATE VOLTAGE.	330 max.	330 max.	volts
GRID-No.2 (SCREEN-GRID)			
SUPPLY VOLTAGE.	-	330 max.	volts
GRID-No.2 VOLTAGE.	-	See <i>Grid-No.2 Input</i>	
<i>Rating Chart at front of Receiving Tube Section</i>			
GRID-No.1 (CONTROL-GRID)			
VOLTAGE:			
Positive-bias value.	0 max.	0 max.	volts
GRID-No.2 INPUT:			
For grid-No.2 voltages			
up to 165 volts.	-	0.55 max.	watt
For grid-No.2 voltages			
between 165 and 330 volts.	-	See <i>Grid-No.2 Input</i>	
<i>Rating Chart at front of Receiving Tube Section</i>			
PLATE DISSIPATION.	2.5 max.	3 max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with			
respect to cathode.	200 max.	200★ max.	volts
Heater positive with			
respect to cathode.	200 max.	200★ max.	volts

Maximum Circuit Values:

	Triode Unit	Pentode Unit	
Grid-No.1-Circuit Resistance:			
For fixed-bias operation.	-	0.5 max.	megohm
For cathode-bias operation.	-	1 max.	megohm


▲ With external shield JEDEC No.315 connected to pin 4 except as noted.

● With external shield JEDEC No.315 connected to pin 6.

★ The dc component must not exceed 100 volts.


→ Indicates a change.

AVERAGE CHARACTERISTICS Triode Unit

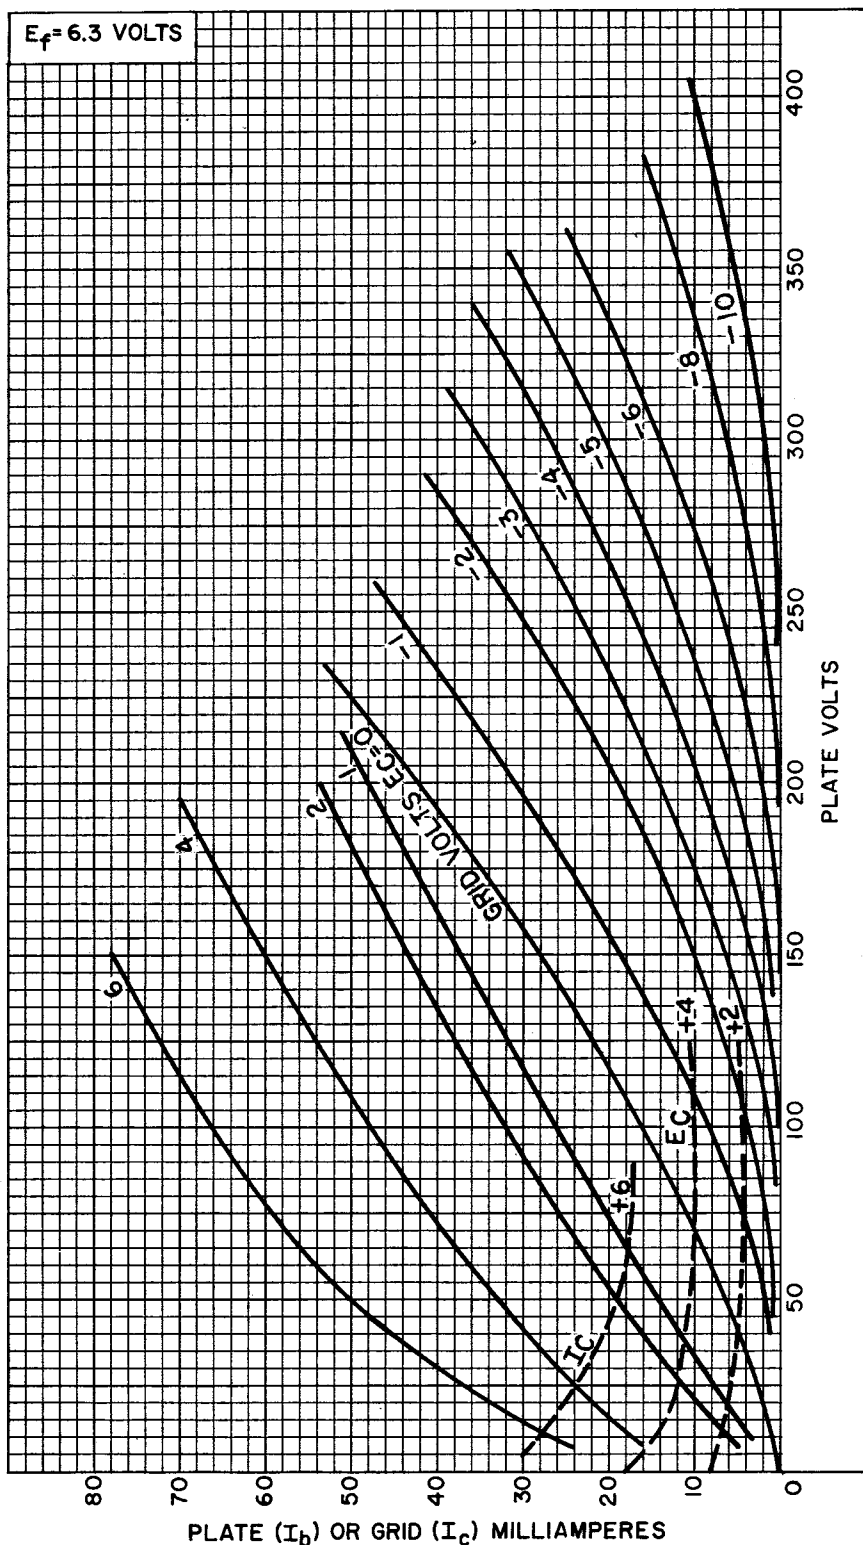

6U8-A


AVERAGE CHARACTERISTICS Triode Unit

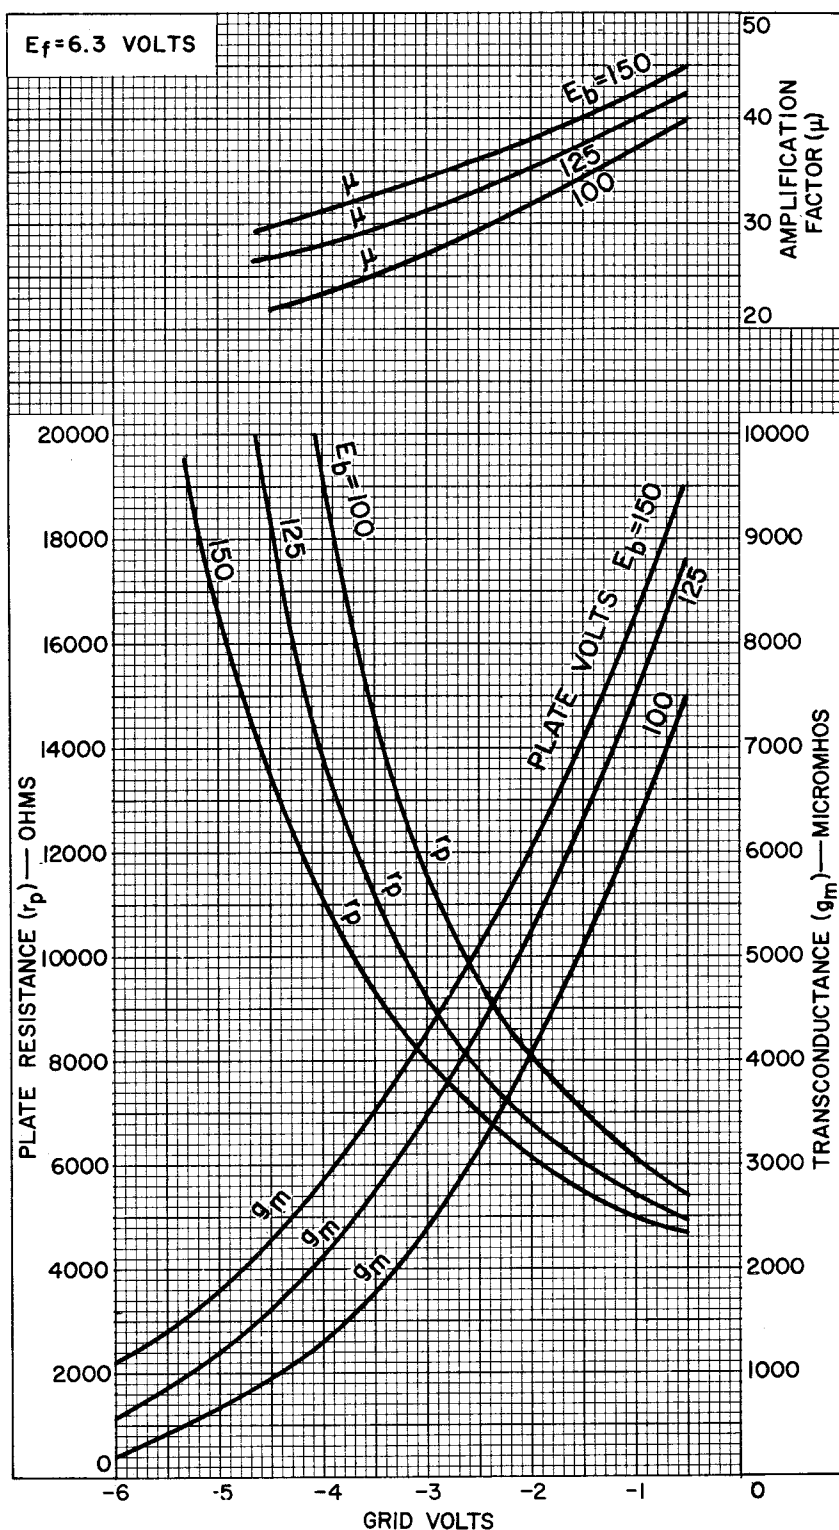

92CM-10900



AVERAGE CHARACTERISTICS Pentode Unit

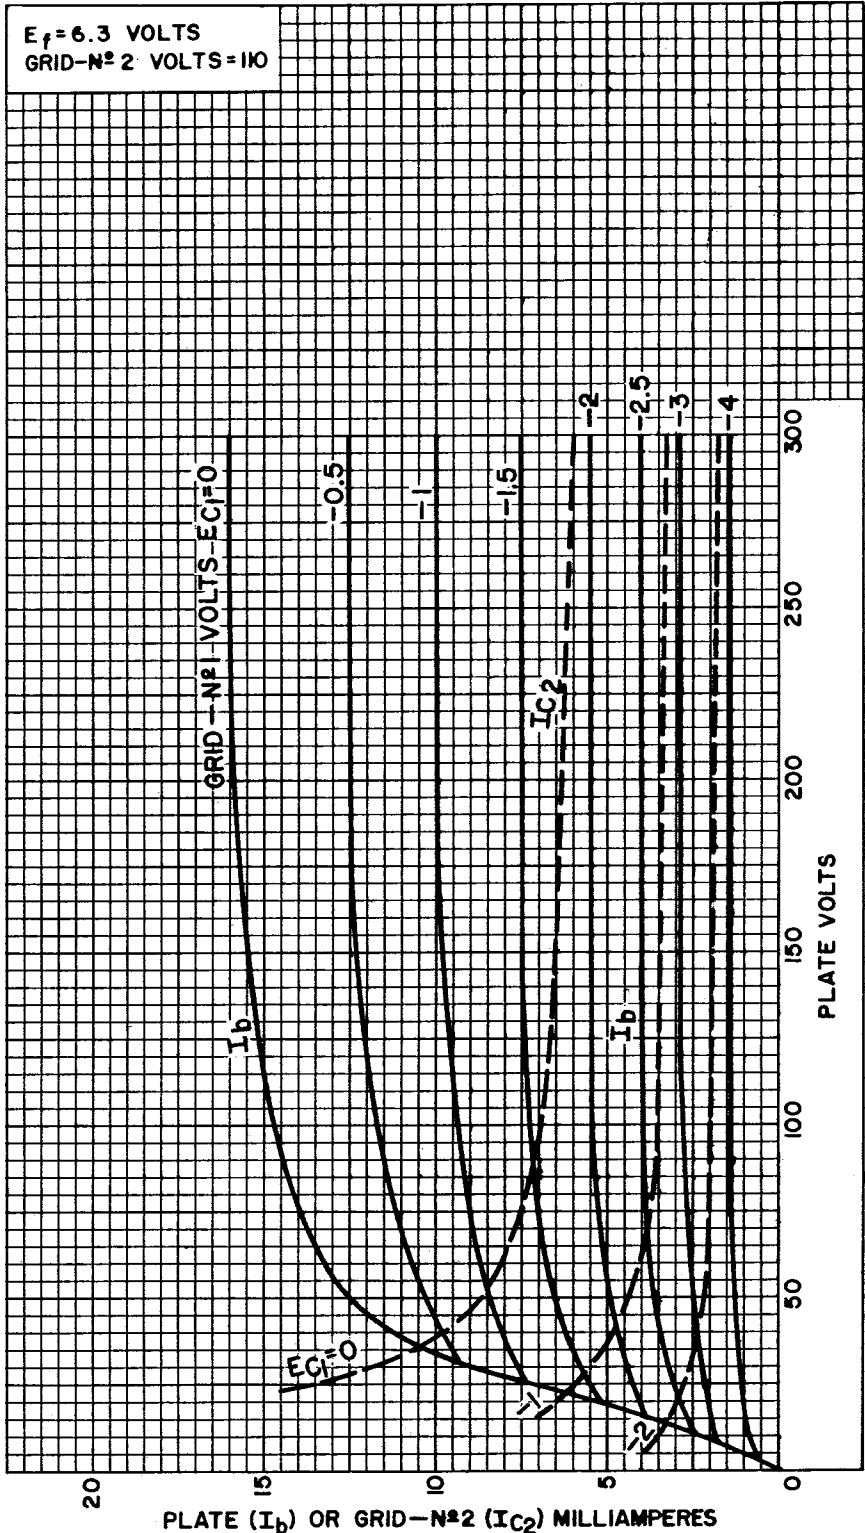


92CM-7869RI



6U8-A

AVERAGE CHARACTERISTICS Pentode Unit

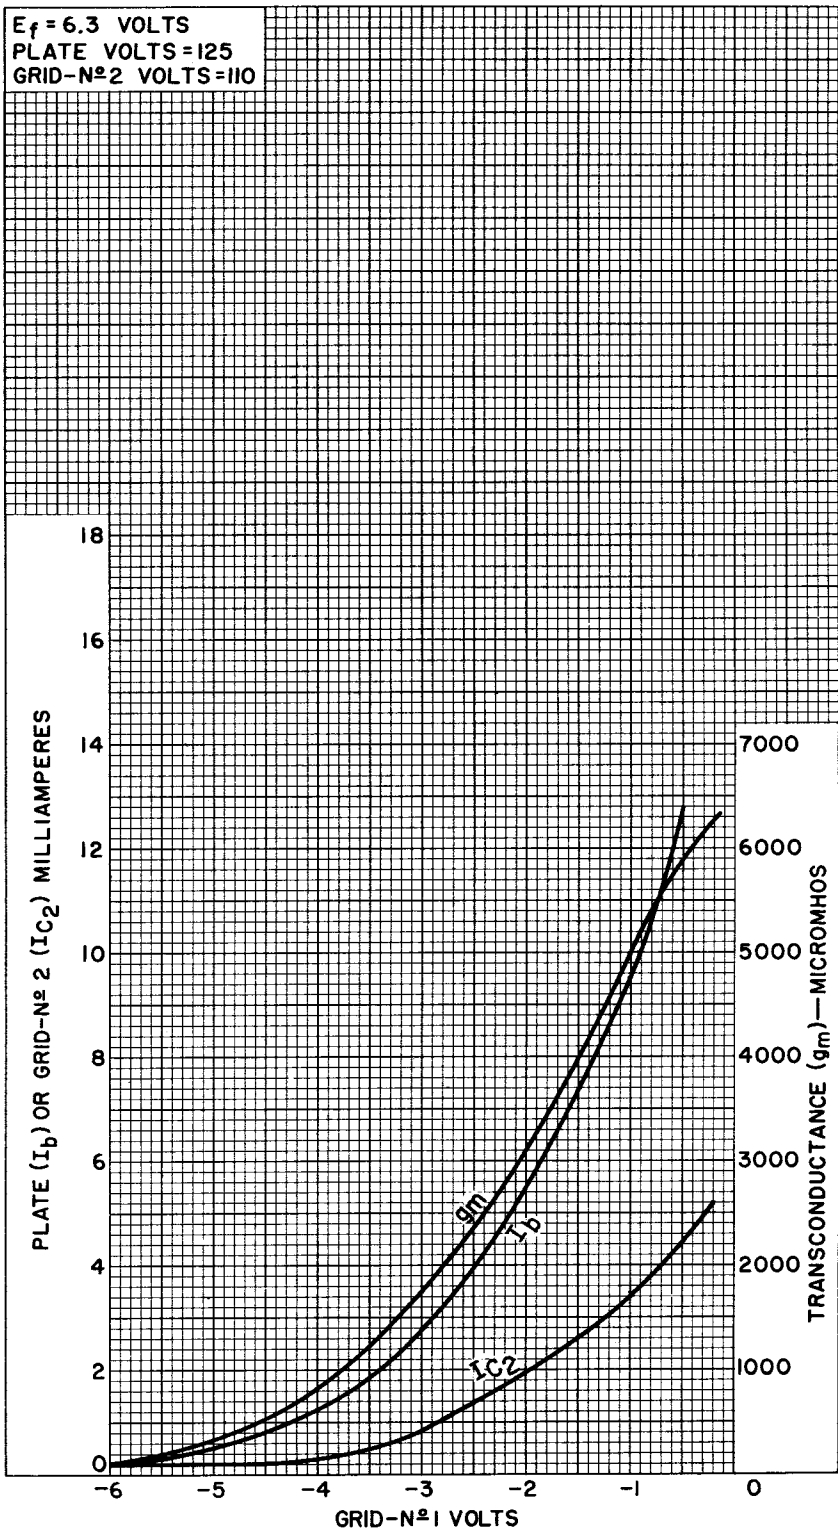

92CM-10902

