



6W6-GT

6W6-GT

BEAM POWER AMPLIFIER

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage	6.3	ac or dc volts
Current	1.2	amp

Direct Interelectrode Capacitances (Approx.):

Grid No.1 to Plate	0.5 max.	μf
Input	15	μf
Output	9	μf

Characteristics as Beam Power Amplifier:

See AMPLIFIER—Class A₁ below:

Characteristics as Triode-Connected Amplifier:

(Grid No.2 connected to plate)

Plate Voltage	225	volts
Grid-No.1 Voltage	-30	volts
Amplification Factor	6.2	
Plate Resistance	1600	ohms
Transconductance	3800	μhos
Plate Current	22	ma
Grid-No.1 Voltage (Approx.) for plate current of 0.5 ma	-42	volts

Mechanical:

Mounting Position	Any
Maximum Overall Length	3-5/16"
Maximum Seated Length	2-3/4"
Maximum Diameter	1-9/32"
Bulb	T-9

Base.	Intermediate-Shell Octal 6-Pin (JETEC No. B6-8) or Intermediate-Shell Octal 7-Pin (JETEC No. B7-7) or Short Intermediate-Shell Octal 6-Pin with Ex- ternal Barriers (JETEC No. B6-60) or Short Intermediate-Shell Octal 7-Pin with Ex- ternal Barriers (JETEC No. B7-59)
---------------	---


Basing Designation for BOTTOM VIEW G-7AC

Pin 1—No
Connection

Pin 2—Heater

Pin 3—Plate

Pin 4—Grid No.2



Pin 5—Grid No.1

Pin 7—Heater

Pin 8—Cathode,
Grid No.3

AMPLIFIER—Class A₁

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE	300 max.	volts
GRID-No.2 (SCREEN) VOLTAGE	150 max.	volts
PLATE DISSIPATION	10 max.	watts
GRID-No.2 INPUT	1.25 max.	watts

← Indicates a change.

OCT. 1, 1953

TUBE DEPARTMENT

TENTATIVE DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



6W6-GT

BEAM POWER AMPLIFIER

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode .	200 max.	volts
Heater positive with respect to cathode .	200 [▲] max.	volts

Typical Operation and Characteristics:

Plate Supply Voltage	110	200	volts
Grid-No.2 Voltage	110	125	volts
Grid-No.1 (Control-Grid) Voltage . .	-7.5	-	volts
Cathode-Bias Resistor	-	180	ohms
Peak AF Grid-No.1 Voltage	7.5	8.5	volts
Zero-Signal Plate Current	49	46	ma
Max.-Signal Plate Current	50	47	ma
Zero-Signal Grid-No.2 Current	4	2.2	ma
Max.-Signal Grid-No.2 Current	10	8.5	ma
Plate Resistance (Approx.)	13000	28000	ohms
Transconductance	8000	8000	μmhos
Load Resistance	2000	4000	ohms
Total Harmonic Distortion (Approx.) .	10	10	%
Max.-Signal Power Output	2.1	3.8	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For fixed-bias operation	0.1 max.	megohm
For cathode-bias operation	0.5 max.	megohm

VERTICAL DEFLECTION AMPLIFIER

Triode Connected--Grid No.2 Connected to Plate

Maximum Ratings, Design-Center Values Except As Noted:

For operation in a 525-line, 30-frame system[●]

DC PLATE VOLTAGE	300 max.	volts
PEAK POSITIVE-PULSE PLATE VOLTAGE [○]	1200 [▲] max.	volts
PEAK NEGATIVE-PULSE GRID-No.1 (CONTROL-GRID) VOLTAGE	-250 max.	volts
CATHODE CURRENT:		
Peak	140 max.	ma
DC	40 max.	ma
PLATE DISSIPATION	7.5 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode .	200 max.	volts
Heater positive with respect to cathode .	200 [▲] max.	volts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For cathode-bias operation	2.2 max.	megohms
--------------------------------------	----------	---------


[▲] The dc component must not exceed 100 volts.[●] As described in "Standards of Good Engineering Practice for Television Broadcast Stations", Federal Communications Commission.[○] The duration of the voltage pulse must not exceed 15 per cent of one scanning cycle. In a 525-line, 30-frame system, 15 per cent of one scanning cycle is 2.5 milliseconds.[▲] under no circumstances should this absolute value be exceeded.



6W6-GT

AVERAGE PLATE CHARACTERISTICS PENTODE CONNECTION

6W6-GT

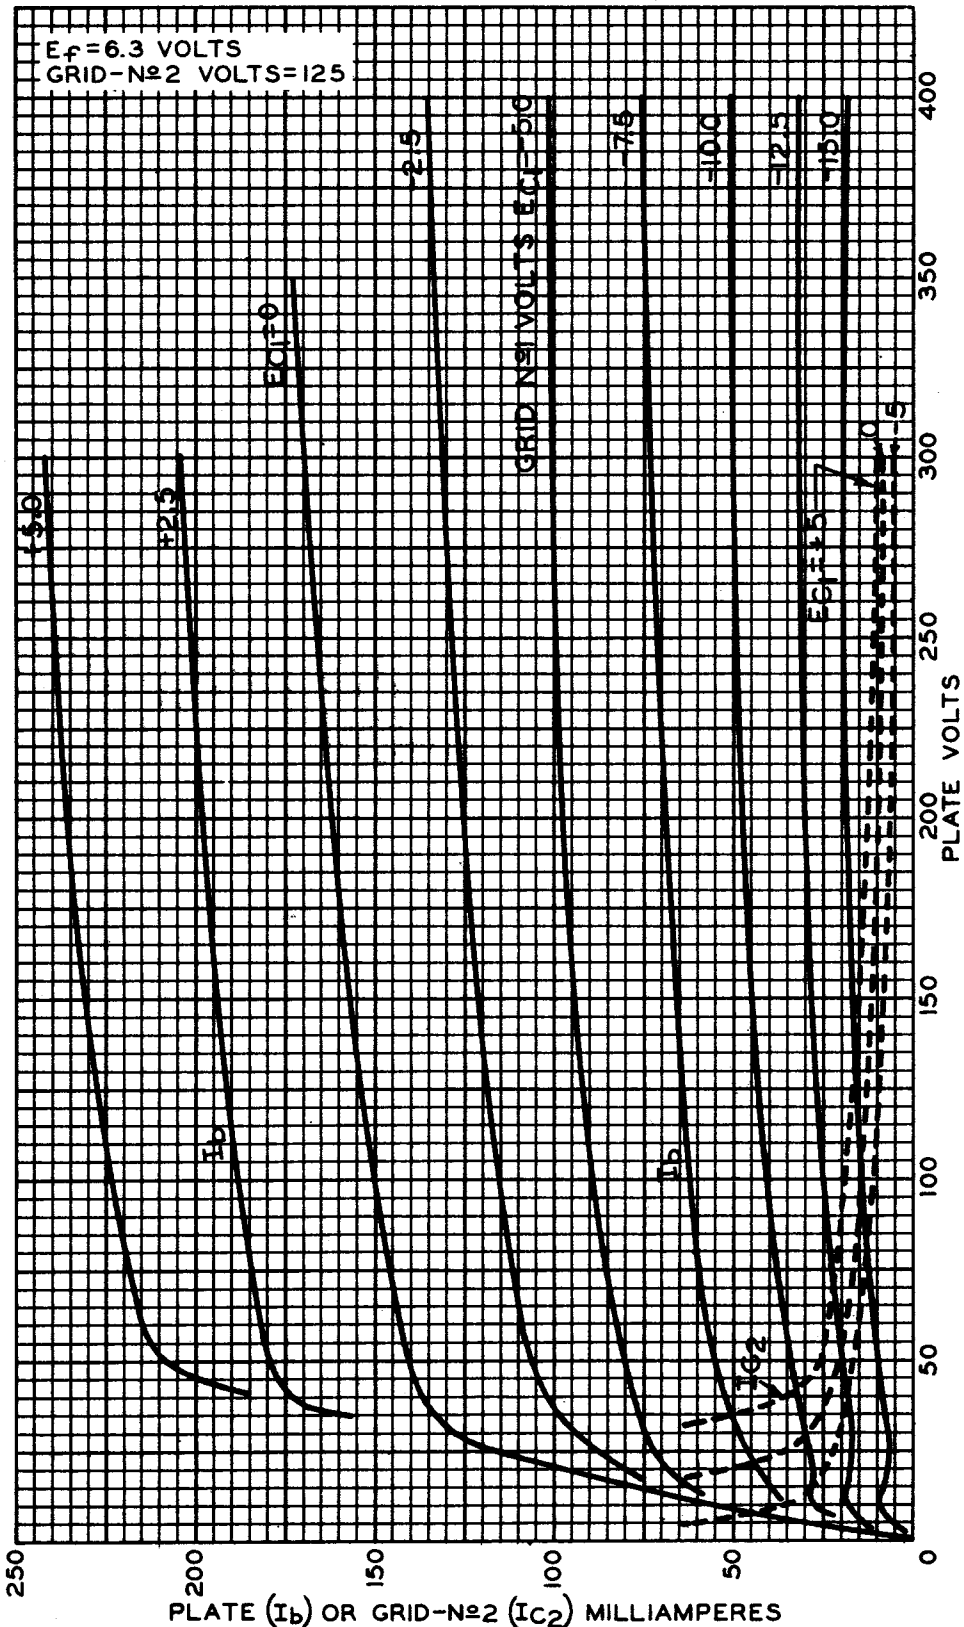

MAR.20.1953

TUBE DEPARTMENT


92CM-7942

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6W6-GT



6W6-GT AVERAGE PLATE CHARACTERISTICS TRIODE CONNECTION

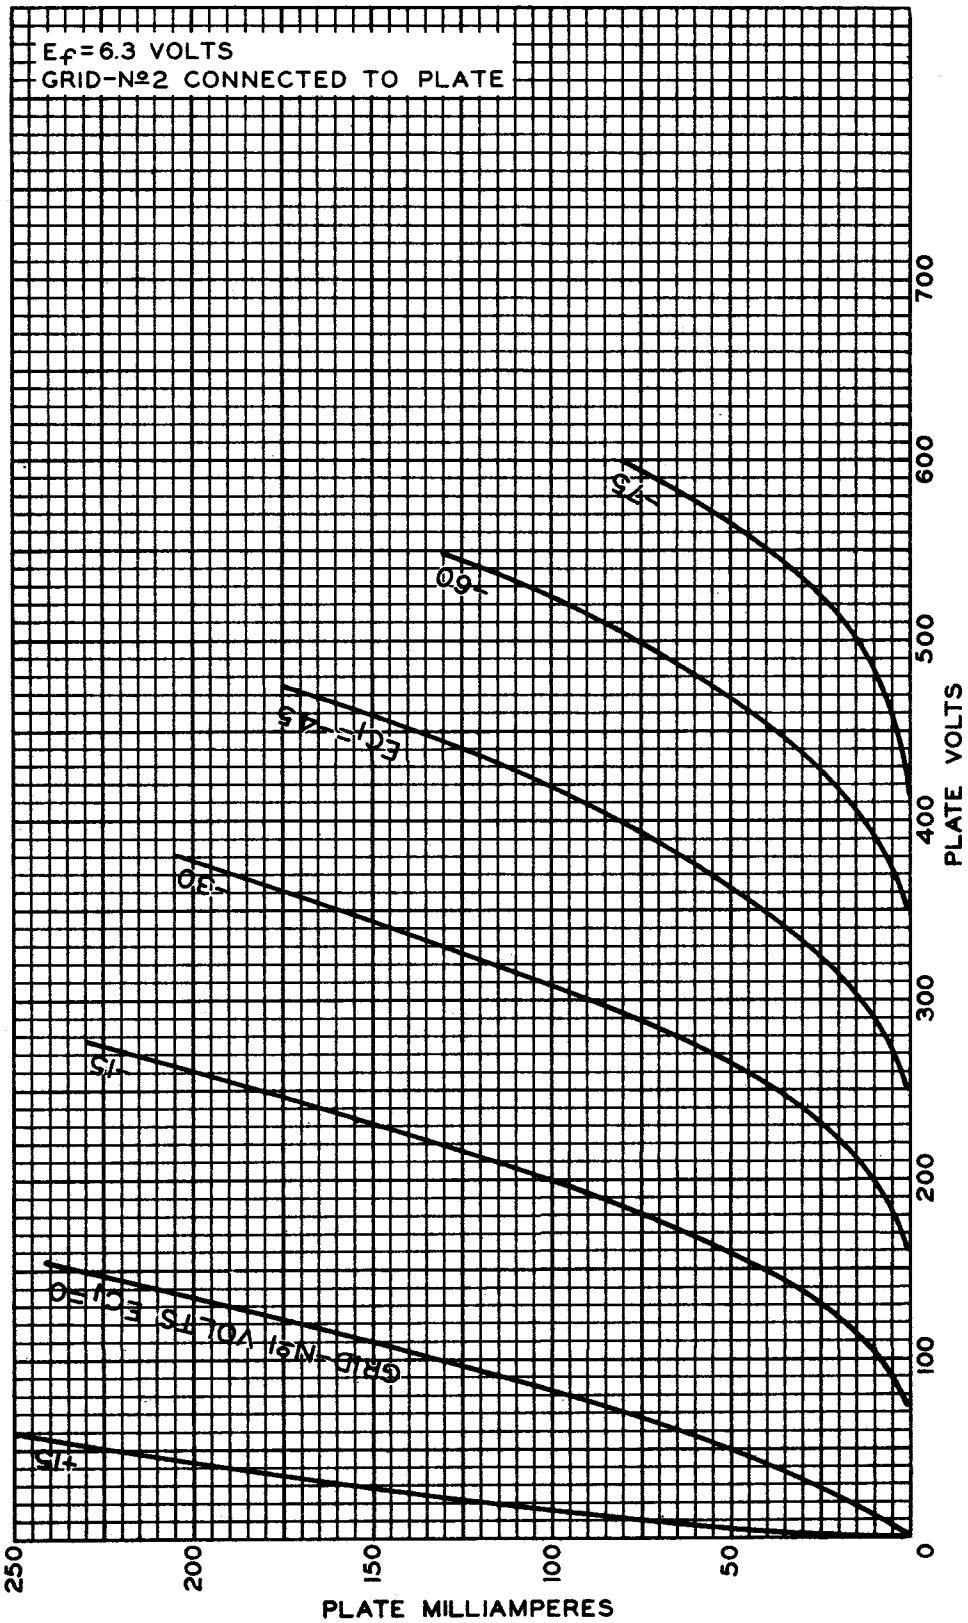

MAR. 11, 1953

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7943