

Pentode—Beam Power Tube

DUODECAR TYPE

*For Combined Limiter, Discriminator, and Audio Power
Output Applications in FM Radio and TV Receivers*

ELECTRICAL CHARACTERISTICS

Bogey Values

Heater Voltage	E_h	6.3	V
Heater Current	I_h	0.950	A

Direct Interelectrode Capacitances

Without external shield

Pentode Unit:

G_{1p} to G_{3p}	c_{g1-g3}	0.009	pF
G_{1p} to ($K_p + 1S$, P_p , G_{3p} , G_{2p} , H) . . .	c_{g1-all}	4.4	pF
G_{3p} to ($K_p + 1S$, P_p , G_{2p} , G_{1p} , H) . . .	c_{g3-all}	3.2	pF

Beam Power Unit:

G_{1B} to P_B	c_{g1-p}	0.22	pF
Input: G_{1B} to ($K_B + G_{3B}$, G_{2B} , H) . . .	c_i	11	pF
Output: P_B to ($K_B + G_{3B}$, G_{2B} , H) . . .	c_o	7.5	pF

Pentode Unit

For the following characteristics, see Conditions

Transconductance, Grid No.1

to Plate	g_m	-	-	360	μ mho
--------------------	-------	---	---	-----	-----------

Transconductance, Grid No.3

to Plate	$g_m(g_{3-p})$	-	-	700	μ mho
--------------------	----------------	---	---	-----	-----------

DC Plate Current	I_b	5	-	-	mA
----------------------------	-------	---	---	---	----

DC Grid-No.2 Current	I_{c2}	4.5	-	-	mA
--------------------------------	----------	-----	---	---	----

Cutoff DC Grid-No.1 Voltage for

$I_b = 20 \mu A$	$E_{c1(co)}$	-	-	-4	V
----------------------------	--------------	---	---	----	---

Cutoff DC Grid-No.3 Voltage for

$I_b = 20 \mu A$	$E_{c3(co)}$	-	-	-4	V
----------------------------	--------------	---	---	----	---

Conditions

Heater Voltage	E_h	Bogey value			V
DC Plate Voltage	E_b	135	135	135	V
DC Grid-No.3 Voltage	E_{c3}	4	4	0	V
DC Grid-No.2 Supply Voltage	E_{cc2}	-	280	280	V
DC Grid-No.2 Voltage	E_{c2}	75	-	-	V
DC Grid-No.1 Voltage	E_{c1}	0	0	0	V
Grid-No.2 Resistor	R_{g2}	-	33	33	k Ω

Beam Power Unit

For the following characteristics, see Conditions

Plate Resistance (Approx.)	r_p	100		k Ω
Transconductance	g_m	6500		μ mho
DC Plate Current	I_b	35		mA
DC Grid-No.2 Current	I_{c2}	3		mA

Conditions

Heater Voltage	E_h	Bogey value			V
DC Plate Voltage	E_b	250			V
DC Grid-No.2 Voltage	E_{c2}	250			V
DC Grid-No.1 Voltage	E_{c1}	-8			V




MECHANICAL CHARACTERISTICS

Operating Position	Any
Type of Cathodes	Coated Unipotential
Maximum Overall Length	2.375 in
Maximum Seated Length.	2.000 in
Maximum Diameter	1.188 in
Dimensional Outline (JEDEC 9-58)	See General Section
Envelope	JEDEC T9
Base	Small-Button Duodecar 12-Pin (JEDEC E12-70)

TERMINAL DIAGRAM (Bottom View)

- Pin 1-Heater
- Pin 2-Beam Power Grid No.2
- Pin 3-Beam Power Cathode,
Beam Power Grid No.3
- Pin 4-Pentode Plate
- Pin 5-Pentode Grid No.3
- Pin 6-Pentode Grid No.2
- Pin 7-Pentode Grid No.1
- Pin 8-Pentode Cathode,
Internal Shields
- Pin 9-Beam Power Plate
- Pin 10-No Internal Connection
- Pin 11-Beam Power Grid No.1
- Pin 12-Heater

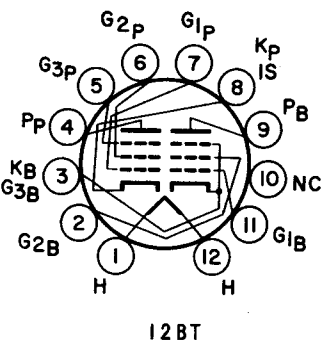

DESIGN-MAXIMUM RATINGS

Pentode Unit for FM and TV Limiter and Discriminator Service; Beam Power Unit for Audio Power Output Service

		Pentode Unit	Beam Power Unit	
DC Plate Supply Voltage. .	E_{bb}	330	-	V
DC Plate Voltage	E_b	-	275	V
DC Grid-No.2 (Accelerator-Grid) Supply Voltage. .	E_{cc2}	330	-	V
DC Grid-No.2 (Screen-Grid) Voltage	E_{c2}	-	275	V
Peak Positive-Pulse Grid-No.1 (Limiter-Grid) Voltage	e_{c1m}	60	-	V
Heater-Cathode Voltage:				
Peak	e_{hkm}	±200	±200	V
DC	E_{hk}	100	100	V
Heater Voltage (AC or DC). .	E_h	5.7 to 6.9		
Average Cathode Current. .	$I_{k(av)}$	13	-	mA
Grid-No.2 Input.	P_{g2}	-	2	W
Plate Dissipation.	P_b	-	10	W

MAXIMUM CIRCUIT VALUES

Beam Power Unit

Grid-No.1-Circuit Resistance:	$R_{g1(ckt)}$	
For fixed-bias operation	-	0.25 MΩ
For cathode-bias operation	-	0.5 MΩ

TYPICAL OPERATION

Beam Power Unit

		Bogey value	
Heater Voltage	E_h		V
DC Plate Voltage	E_b	250	V
DC Grid-No.2 Voltage	E_{c1}	250	V
DC Grid-No.1 Voltage	E_{c2}	-8	V
Peak AF Grid-No.1 Voltage.	e_{c1m}	8	V
Plate Resistance (Approx.)	r_p	100	k Ω
Transconductance	g_m	6500	μ mho
Zero-Signal Plate Current.	I_b	35	mA
Maximum-Signal Plate Current	I_b	39	mA
Zero-Signal Grid-No.2 Current.	I_{c2}	3	mA
Maximum-Signal Grid-No.2 Current	I_{c2}	13	mA
Load Resistance	R_L	5000	Ω
Total Harmonic Distortion.		8.5	%
Maximum-Signal Power Output.	P_o	4.2	W

