

DETECTOR, AMPLIFIER

Filament Voltage	Thoriated Tungsten		d-c volts
Current	5.0		amp.
	0.25		
Direct Interelectrode Capacitances:			
Grid to Plate	8.1		μpf
Grid to Filament	3.1		μpf
Plate to Filament	2.2		μpf
Maximum Overall Length			4-11/16"
Maximum Diameter			1-13/16"
Bulb	(2)	(3)	ST-14
Base			Medium 4-Pin Bayonet
Pin 1-Filament+	(1)		Pin 3-Grid
Pin 2-Plate		(4)	Pin 4-Filament-

BOTTOM VIEW

AMPLIFIER (Class A)

Operating Conditions and Characteristics:


Filament	5.0	5.0	d-c volts
Plate	90	135 max.	volts
Grid	-4.5	-9	volts
Amp. Fact.	8	8	
Plate Res.	11000	10000	ohms
Mut. Cond.	725	800	μmhos
Plate Cur.	2.5	3	ma.

DETECTOR

Typical Operation:


	Biased		Grid-Leak	
Filament	5.0	5.0	5.0	d-c volts
Plate	90	135 max.	45	volts
Grid (approx.)	-7.5	-13.5	Return to (+) Fil.	volts
Plate Cur.	Adjusted to 0.2 ma. with no input signal		-	volts
Grid Leak	-	-	0.25 to 5	megohms
Grid Condenser	-	-	0.00025	μf

AVERAGE CHARACTERISTICS

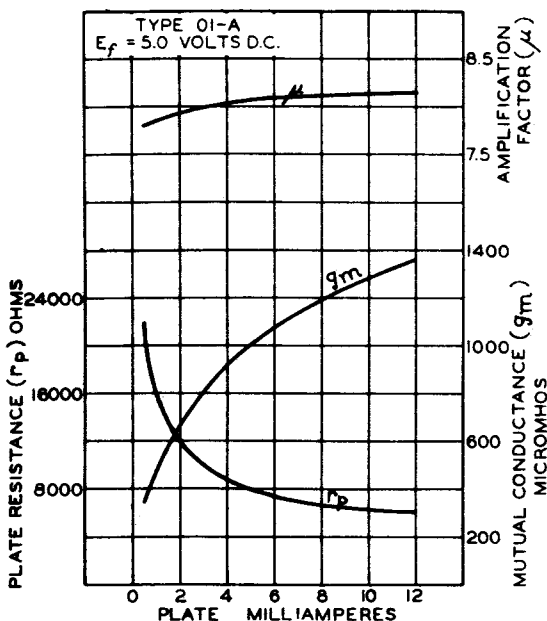

01-A

AVERAGE PLATE CHARACTERISTICS

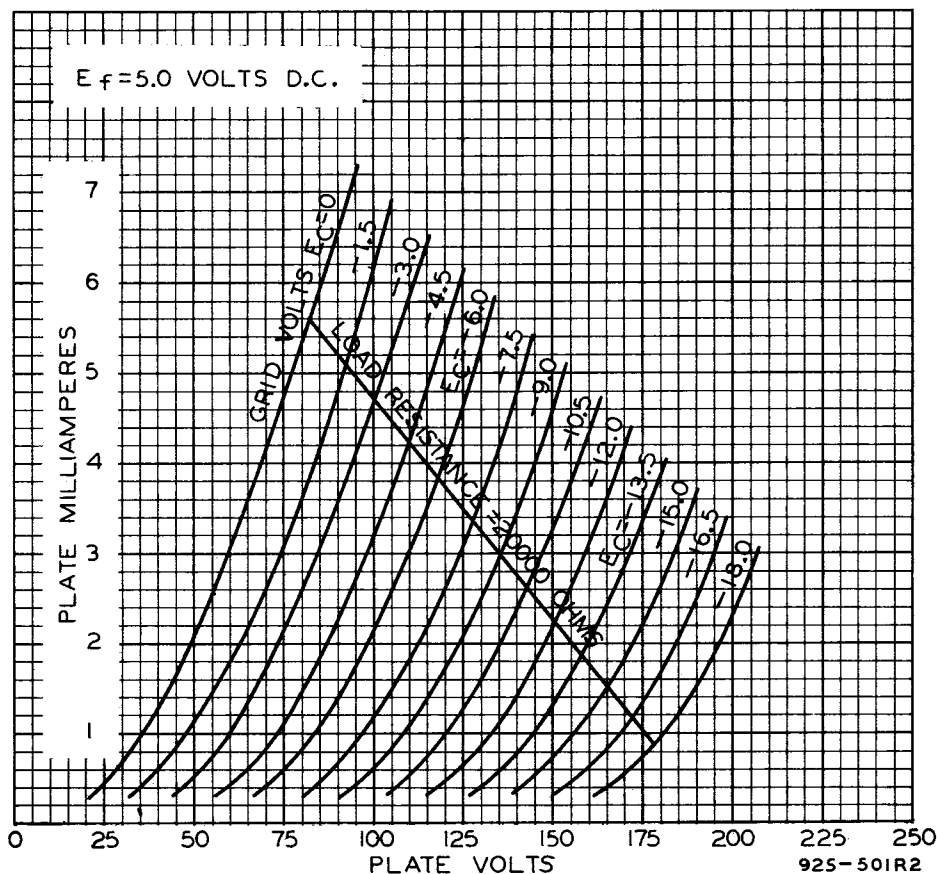

AVERAGE CHARACTERISTICS

