

# High-Mu Triode—Beam Power Tube

## NOVAR TYPE

*For Combined Vertical-Deflection Oscillator and Amplifier Service in Color TV Receivers*

### ELECTRICAL CHARACTERISTICS

#### Bogey Values

|                                                       |       |      |    |
|-------------------------------------------------------|-------|------|----|
| Heater Current . . . . .                              | $I_f$ | 450  | mA |
| Heater Voltage (AC or DC) at $I_f = 450$ mA . . . . . | $E_f$ | 21.0 | V  |
| Heater Warm-up Time (Average). . . . .                |       | 11   | s  |

#### Direct Interelectrode Capacitances (Approx.)

Without external shield

#### Triode Unit:


|                                         |          |     |    |
|-----------------------------------------|----------|-----|----|
| Grid to plate. . . . .                  | $C_{gp}$ | 6.0 | pF |
| Input: $G_T$ to ( $K_T$ , H). . . . .   | $C_i$    | 6.5 | pF |
| Output: $P_T$ to ( $K_T$ , H) . . . . . | $C_o$    | 1.6 | pF |

#### Beam Power Unit:

|                                             |          |          |    |
|---------------------------------------------|----------|----------|----|
| Grid No.1 to plate . . . . .                | $C_{gp}$ | 0.7 max  | pF |
| $G1B$ to ( $KB + G3B$ , $G2B$ , H). . . . . | $C_i$    | 16.0     | pF |
| $PB$ to ( $KB + G3B$ , $G2B$ , H). . . . .  | $C_o$    | 9.0      | pF |
| $G1B$ to $P_T$ . . . . .                    |          | 0.12 max | pF |
| $PB$ to $P_T$ . . . . .                     |          | 0.32 max | pF |

**Basing Designation for BOTTOM VIEW . . . . . 9QT**

- Pin 1—Triode Cathode  
 Pin 2—Beam Power Grid No.1  
 Pin 3—Beam Power Cathode &  
           Grid No.3  
 Pin 4—Heater  
 Pin 5—Heater  
 Pin 6—Beam Power Plate  
 Pin 7—Beam Power Grid No.2  
 Pin 8—Triode Plate  
 Pin 9—Triode Grid



### CLASS $A_1$ AMPLIFIER

*For the following characteristics, see Conditions*

|                                   |                  | Triode Unit | Beam Power Unit  |                       |
|-----------------------------------|------------------|-------------|------------------|-----------------------|
| Amplification Factor              | $\mu$            | 58          | -                | 6.5 <sup>a</sup>      |
| Plate Resistance                  |                  |             |                  |                       |
| (Approx.) . . . . .               | $r_p$            | 16000       | -                | 12000 $\Omega$        |
| Transconductance . . . . .        | $g_m$            | 3600        | -                | 9300 $\mu\text{mhos}$ |
| DC Plate Current . . . . .        | $I_b$            | 2.3         | 200 <sup>b</sup> | 56 mA                 |
| DC Grid-No.2 Current              | $I_g$            | -           | 20 <sup>b</sup>  | 3 mA                  |
| Cutoff DC Grid-No.1 Voltage       |                  |             |                  |                       |
| $I_b = 10 \mu\text{A}$ . . . . .  | $E_c(\text{co})$ | -6.6        | -                | - V                   |
| $I_b = 1 \text{ mA}$ (Approx.)    | $E_c(\text{co})$ | -           | -                | -26 V                 |
| $I_b = 100 \mu\text{A}$ . . . . . | $E_c(\text{co})$ | -           | -                | -30 V                 |



# 21LR8

## Conditions

|                             |       | Triode Unit | Beam Power Unit |      |        |
|-----------------------------|-------|-------------|-----------------|------|--------|
| Heater Voltage . . . . .    | $E_f$ | 21.0        | 21.0            | 21.0 | 21.0 V |
| Plate Voltage . . . . .     | $E_b$ | 250         | 45              | 135  | 120 V  |
| Grid-No.2 Voltage . . . . . | $E_c$ | -           | 125             | 120  | 120 V  |
| Grid-No.1 Voltage . . . . . | $E_c$ | -4          | 0               | -10  | -10 V  |

## MECHANICAL CHARACTERISTICS

|                                                            |                     |
|------------------------------------------------------------|---------------------|
| Operating Position . . . . .                               | Any                 |
| Type of Cathodes . . . . .                                 | Coated Unipotential |
| Maximum Overall Length ( $l_m$ ) . . . . .                 | 3.710 in            |
| Maximum Seated Length ( $l_m$ ) . . . . .                  | 3.330 in            |
| Length, Base Seat to Bulb Top<br>(Excluding tip) . . . . . | 2.810 to 2.990 in   |
| Diameter ( $d$ ) . . . . .                                 | 1.438 to 1.562 in   |
| Envelope . . . . .                                         | T12                 |
| Bases (alternates)                                         |                     |

Small-Button Novar 9-Pin (JEDEC No.E9-76)

Small-Button Novar 9-Pin with Exhaust Tip 9-Pin  
(JEDEC No.E9-88)

## VERTICAL-DEFLECTION OSCILLATOR (Triode Unit)

### Maximum Ratings, Design-Maximum Values

For operation in a 525-line, 30-frame system

|                                            |             |     |    |
|--------------------------------------------|-------------|-----|----|
| DC Plate Voltage . . . . .                 | $E_b$       | 400 | V  |
| Peak Negative-Pulse Grid Voltage . . . . . | $e_{cm}$    | 400 | V  |
| Peak Cathode Current . . . . .             | $i_{km}$    | 105 | mA |
| Average Cathode Current . . . . .          | $I_{k(av)}$ | 30  | mA |
| Plate Dissipation . . . . .                | $P_b$       | 2.5 | W  |
| Peak Power Output . . . . .                | $P_o$       | 2.5 | W  |

### Maximum Circuit Values

|                                            |            |     |            |
|--------------------------------------------|------------|-----|------------|
| Grid-Circuit Resistance . . . . .          | $R_g(ckt)$ | 2.2 | M $\Omega$ |
| For grid-resistor-bias operation . . . . . |            |     |            |

## VERTICAL-DEFLECTION AMPLIFIER (Beam Power Unit)

### Maximum Ratings, Design-Maximum Values

For operation in a 525-line, 30-frame system

|                                                                   |             |                   |    |
|-------------------------------------------------------------------|-------------|-------------------|----|
| DC Plate Voltage . . . . .                                        | $E_b$       | 400               | V  |
| Peak Positive-Pulse Plate Voltage <sup>c</sup> . . . . .          | $e_{bm}$    | 2500 <sup>d</sup> | V  |
| DC Grid-No.2 (Screen-Grid) Voltage . . . . .                      | $E_c$       | 300               | V  |
| Peak Negative-Pulse Grid-No.1<br>(Control-Grid) Voltage . . . . . | $e_{cm}$    | 250               | V  |
| Peak Cathode Current . . . . .                                    | $i_{km}$    | 260               | mA |
| Average Cathode Current . . . . .                                 | $I_{k(av)}$ | 75                | mA |
| Plate Dissipation <sup>e</sup> . . . . .                          | $P_b$       | 14                | W  |
| Grid-No.2 Input <sup>e</sup> . . . . .                            | $P_c$       | 2.75              | W  |
| Envelope Temperature . . . . .                                    | $T_E$       | 210               | °C |


### MAXIMUM CIRCUIT VALUES

|                                            |            |     |            |
|--------------------------------------------|------------|-----|------------|
| Grid-Circuit Resistance . . . . .          | $R_g(ckt)$ | 1   | M $\Omega$ |
| For fixed-bias operation . . . . .         |            |     |            |
| For grid-resistor-bias operation . . . . . |            | 2.2 | M $\Omega$ |




- a Triode connection.
- b This value can be measured by a method involving a recurrent wave form such that the plate dissipation and grid-No.2 input will be kept within ratings in order to prevent damage to the tube.
- c This rating is applicable where the duration of the voltage pulse does not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycles is 2.5 milliseconds.
- d Absolute Maximum value.
- e An adequate bias resistor or other means is required to protect the tube in the absence of excitation.

**DIMENSIONAL OUTLINE**  
**Top Exhaust (JEDEC No. 12-65)**

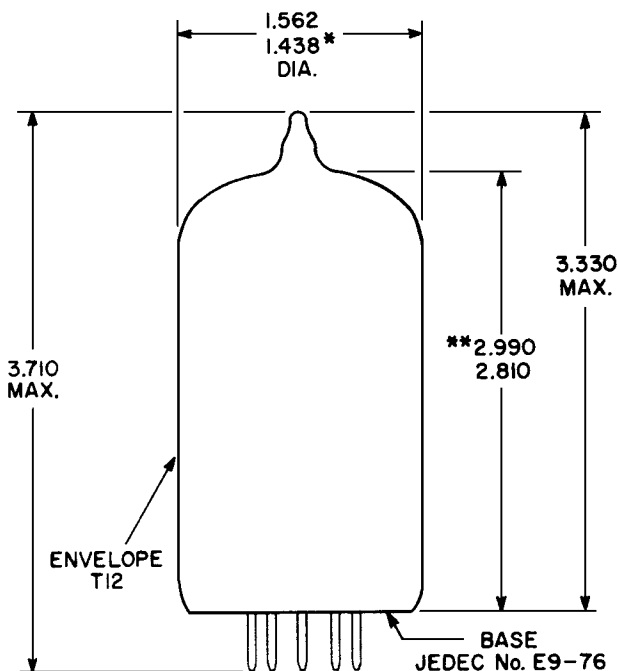

92CS-13502A

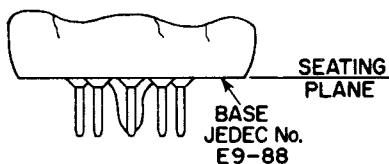

92CS-11127R3B

**DIMENSIONS IN INCHES**


*Bottom-exhaust version has the same dimensions for maximum overall length and seated length as the top-exhaust outline shown.*

\* Applies to the minimum diameter except in the area of the seal.

\*\* Measured from the base seat to bulb-top line as determined by arcing gauge of 0.600" I.D.



Typical Characteristics  
Triode Unit

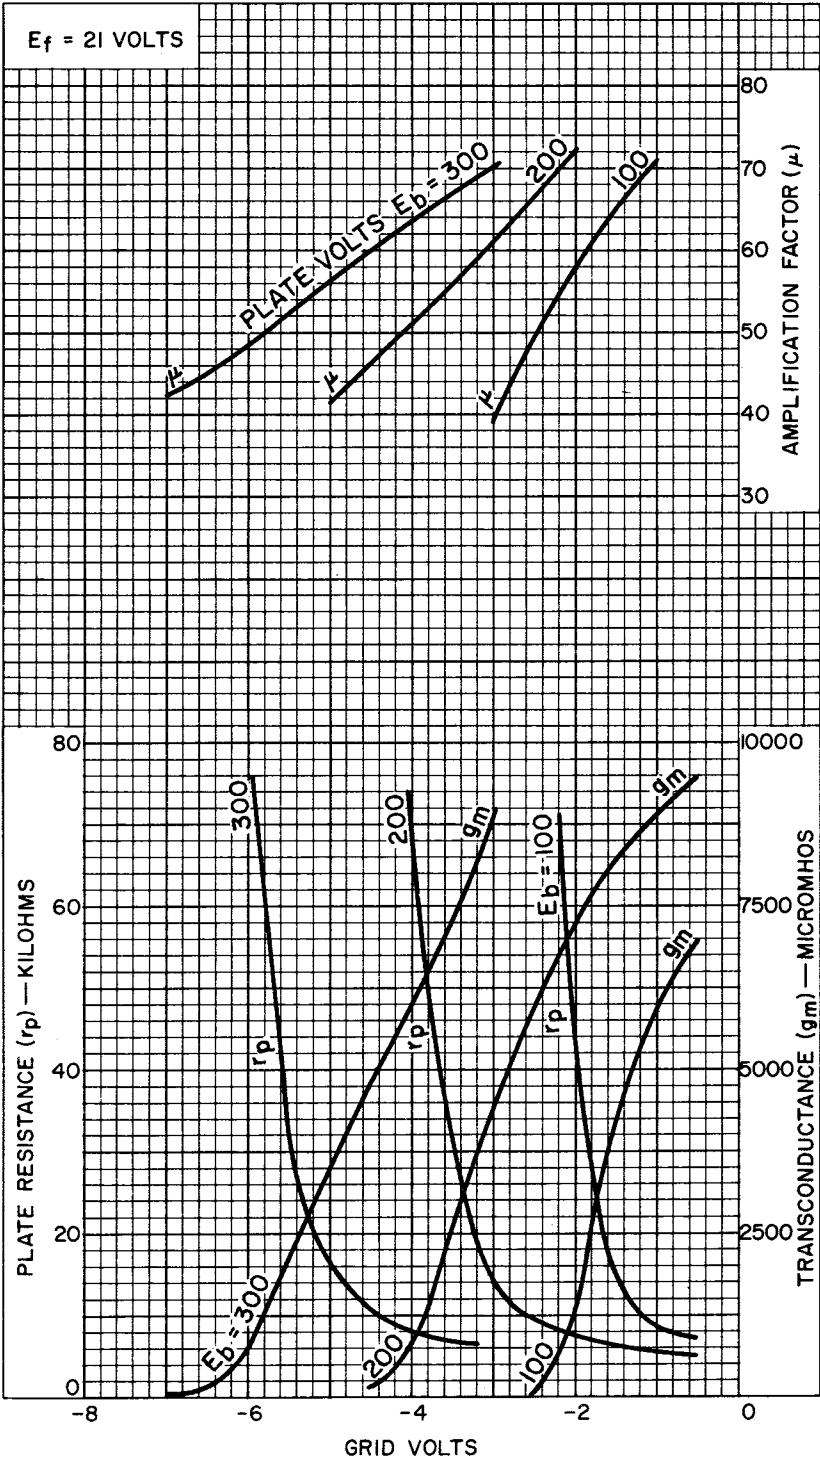


92CM-13506



# Typical Plate Characteristics


Triode Unit

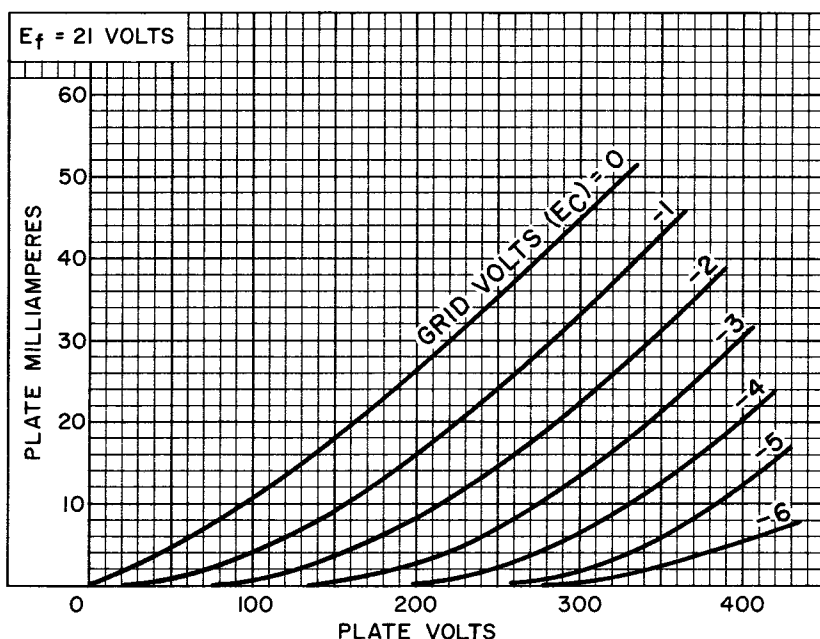

92CS-13508

## Typical Characteristics


Beam Power Unit

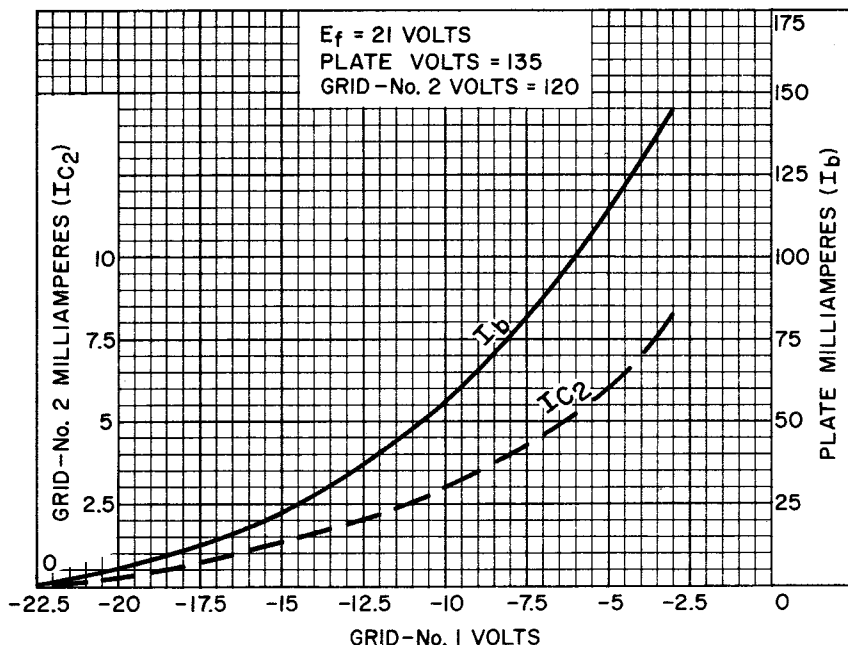

92CS-13509



Typical Characteristics  
Beam Power Unit

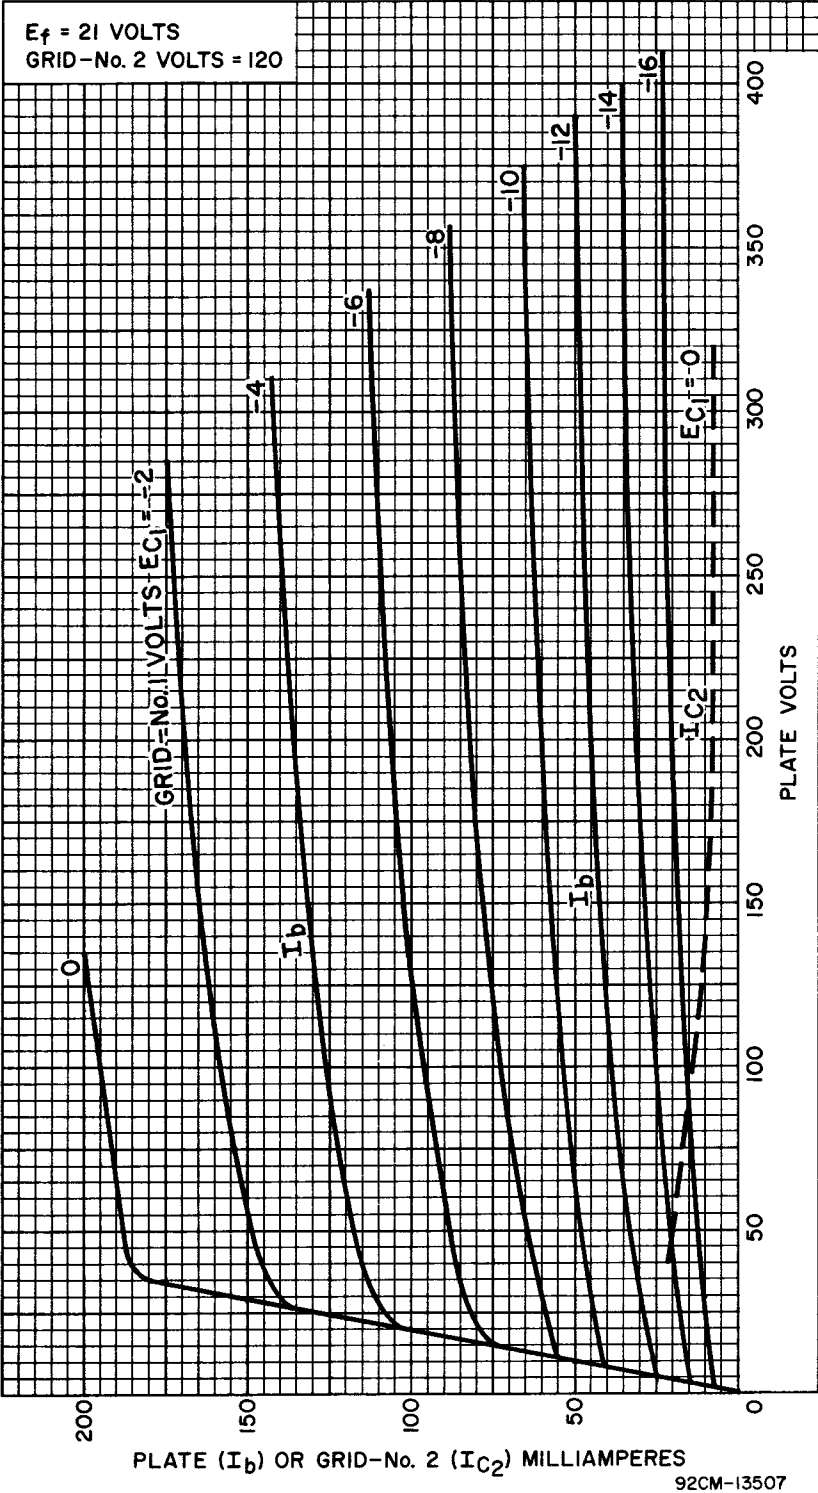

92CM-13507

