




25Z6, 25Z6-GT/G

25Z6
25Z6-GT/G

HIGH-VACUUM RECTIFIER-DOUBLER

Heater Voltage Current	Coated Unipotential Cathodes	
	25 0.3	a-c or d-c volts amp.
	25Z6	25Z6-GT/G
Maximum Overall Length	3-1/4"	3-5/16"
Maximum Seated Height	2-11/16"	2-3/4"
Maximum Diameter	1-5/16"	1-5/16"
Bulb	Metal Shell, MT-8	
Base	{ Small Wafer Octal 7-Pin	
Basing Designation	{ Intermed. Sh. Octal 7-Pin	
Pin 1 { 25Z6, Shell	G-7Q	
Pin 1 { 25Z6-GT/G, No Con.	Pin 4 - Cathode #2	
Pin 2 - Heater	Pin 5 - Plate #1	
Pin 3 - Plate #2	Pin 7 - Heater	
Mounting Position	Pin 8 - Cathode #1	



BOTTOM VIEW

Maximum Ratings Are Design-Center Values
RECTIFIER OR DOUBLER

Peak Inverse Plate Voltage	700 max. volts
Peak Plate Current per Plate	450 max. ma.
D-C Output Current per Plate	75 max. ma.
D-C Heater-Cathode Potential	350 max. volts

Typical Operation as Half-Wave Rectifier
with Condenser-Input Filter:*

Unless otherwise indicated, values are for both plates in parallel.

A-C Plate Supply Voltage				
per Plate (RMS)	117	150	235	volts
Filter Input Condenser	16	16	16	μf
Min. Total Effect. Plate-				
Supply Imped. per Plate	15	40	100	ohms
D-C Output Current per Plate	75	75	75	ma.
D-C Voltage (At input to				
filter):*				
At half-load current (75 ma.)	115	-	255	volts
At full-load current (150 ma.)	80	-	200	volts
Difference (Voltage Regulation)	35	-	55	volts
Percentage Regulation	30	-	22	%

Typical Operation as Voltage Doubler:

	Half-Wave	Full-Wave	
A-C Plate Supply Voltage			
per Plate (RMS)	117	117	volts
Filter Input Condenser (Each)	16	16	μf
Min. Total Effect. Plate-			
Supply Imped. per Plate	30	15	ohms
D-C Output Current	75	75	ma.
D-C Voltage (At input to			
filter):*			
At half-load current (37.5 ma.)	-	250	volts
At full-load current (75 ma.)	-	205	volts
Difference (Voltage Regulation)	-	45	volts
Percentage Regulation	-	18	%

* In half-wave rectifier service, the two units may be used separately or in parallel.

* Approximate values.


Circuits and Plate Characteristic Curve for the 25Z6
and 25Z6-GT/G are the same as for Type 25Z5.

25Z6



25Z6

OPERATION CHARACTERISTICS

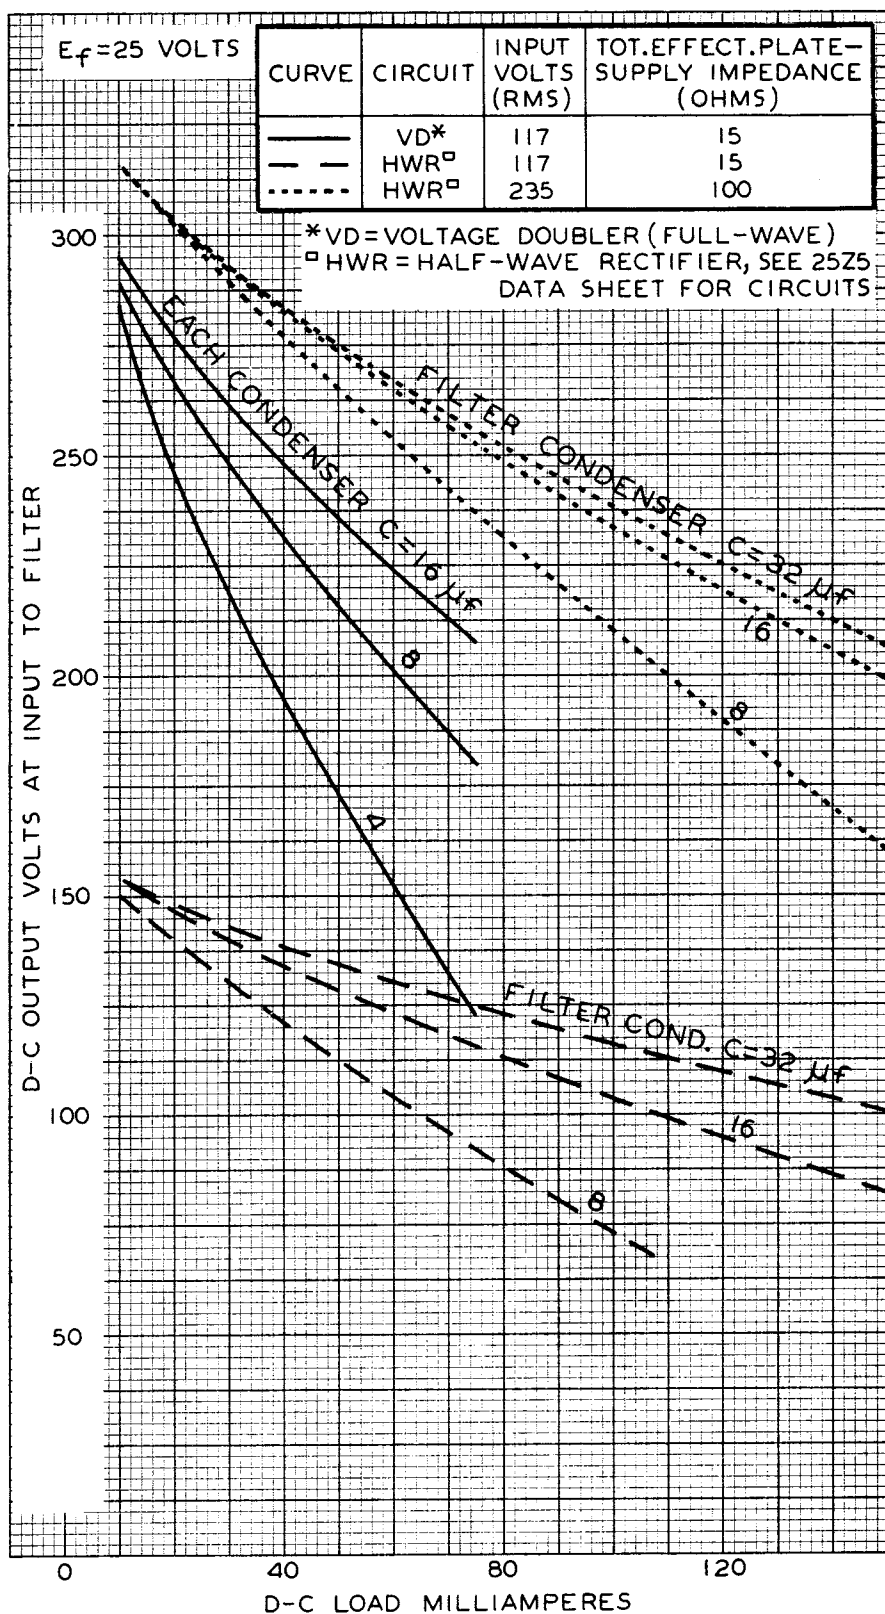

NOV. 27, 1939

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92C-4603 R2