




30

30

DETECTOR, AMPLIFIER

Filament	Coated	
Voltage	2.0	d-c volts
Current	0.060	amp.
Direct Interelectrode Capacitances:		
Grid to Plate	6.0	μf
Grid to Filament	3.0	μf
Plate to Filament	2.1	μf
Maximum Overall Length		4-3/16" ←
Maximum Diameter		1-9/16" ←
Bulb		ST-12
Base		Small 4-Pin
Pin 1-Filament +		Pin 3-Grid
Pin 2-Plate		Pin 4-Filament -
Mounting Position	BOTTOM VIEW	Vertical, Base Down ◊ ←




For additional curve and data, refer to Type 1H4-G. The 30 and the 1H4-G are identical electrically. ←

◊ Horizontal operation permitted if plane of filament is vertical.

← Indicates a change.

AVERAGE CHARACTERISTICS

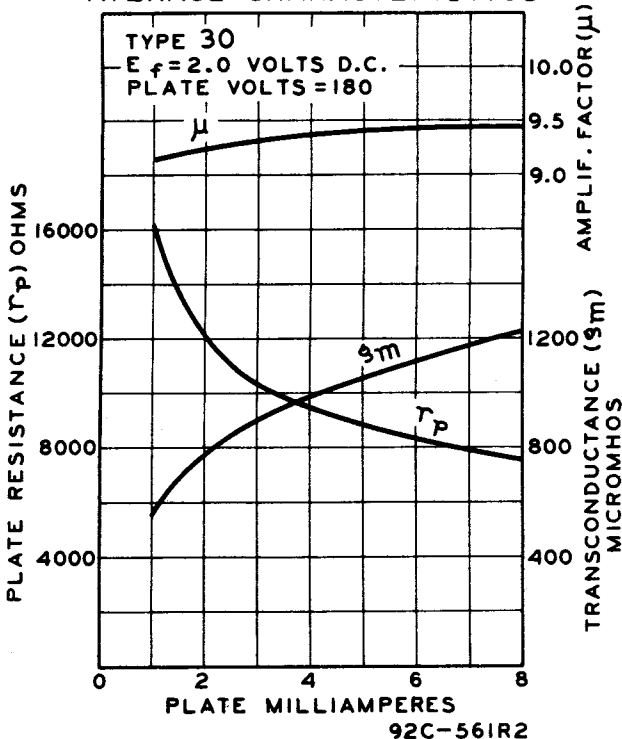



AVERAGE CHARACTERISTICS

