

Power Pentode

7-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC)	60 $\pm$ 10%	volts
Current at 60 volts	0.1	amp

Direct Interelectrode Capacitances
(Approx.):

Grid No.1 to plate.	0.65	μ f
Grid No.1 to cathode & grid No.3, grid No.2, and heater	17	μ f
Plate to cathode & grid No.3, grid No.2, and heater	9	μ f


Characteristics, Class A₁ Amplifier:

Plate Supply Voltage.	110	volts
Grid-No.2 Supply Voltage.	115	volts
Cathode Resistor.	62	ohms
Plate Resistance (Approx.).	17500	ohms
Transconductance.	13500	μ hos
Plate Current	36	ma
Grid-No.2 Current	10	ma

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2-5/8"
Maximum Seated Length	2-3/8"
Length, Base Seat to Bulb Top (Excluding tip)	2" $\pm$ 3/32"
Diameter.	0.650" to 0.750"
Dimensional Outline	See <i>General Section</i>
Bulb.	T5-1/2
Base.	Small-Button Miniature 7-Pin (JEDEC No.E7-1)
Basing Designation for BOTTOM VIEW.	7CV

Pin 1-Cathode,
Grid No.3
Pin 2-Grid No.1
Pin 3-Heater



Pin 4-Heater
Pin 5-Grid No.1
Pin 6-Grid No.2
Pin 7-Plate

AF POWER AMPLIFIER — Class A₁

Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE	150	max.	volts
GRID-No.2 (SCREEN-GRID) VOLTAGE	130	max.	volts
GRID-No.1 (CONTROL-GRID) VOLTAGE:			
Positive-bias value	0	max.	volts
GRID-No.2 INPUT	2	max.	watts
PLATE DISSIPATION	5.5	max.	watts



60FX5

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode.	200	max.	volts
Heater positive with respect to cathode.	200 [●]	max.	volts
BULB TEMPERATURE (At hottest point on bulb surface).	225	max.	°C

Typical Operation:

Plate Supply Voltage.	110	volts
Grid-No.2 Supply Voltage.	115	volts
Cathode Resistor.	62	ohms
Peak AF Grid-No.1 Voltage	3	volts
Zero-Signal Plate Current	36	ma
Max.-Signal Plate Current	35	ma
Zero-Signal Grid-No.2 Current	10	ma
Max.-Signal Grid-No.2 Current	12	ma
Load Resistance	3000	ohms
Total Harmonic Distortion	8	%
Max.-Signal Power Output.	1.3	watts


Maximum Circuit Values:

Grid-No.1-Circuit Resistance:			
For fixed-bias operation.	0.1	max.	megohm
For cathode-bias operation.	0.5	max.	megohm

- ▲ Without external shield.
- The dc component must not exceed 100 volts.



AVERAGE CHARACTERISTICS

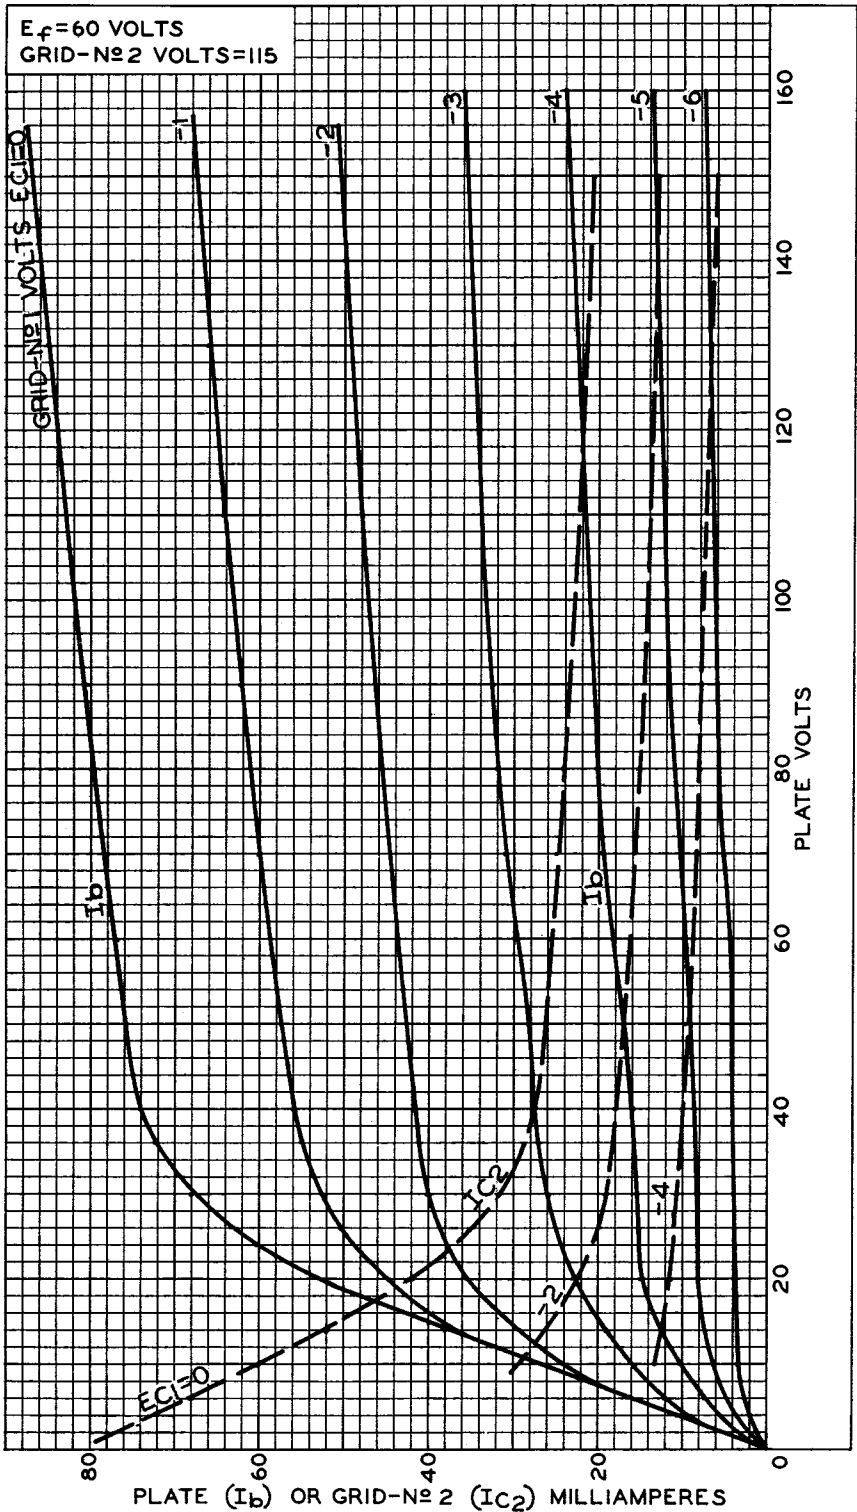


92CM-10546



60FX5

OPERATION CHARACTERISTICS

$E_f = 60$ VOLTS
PLATE SUPPLY VOLTS = 110
GRID-№2 SUPPLY VOLTS = 115
CATHODE RESISTOR (OHMS) = 62
CATHODE-BYPASS CAPACITOR (μf) = 100
SIGNAL VOLTS (RMS) = 2.1

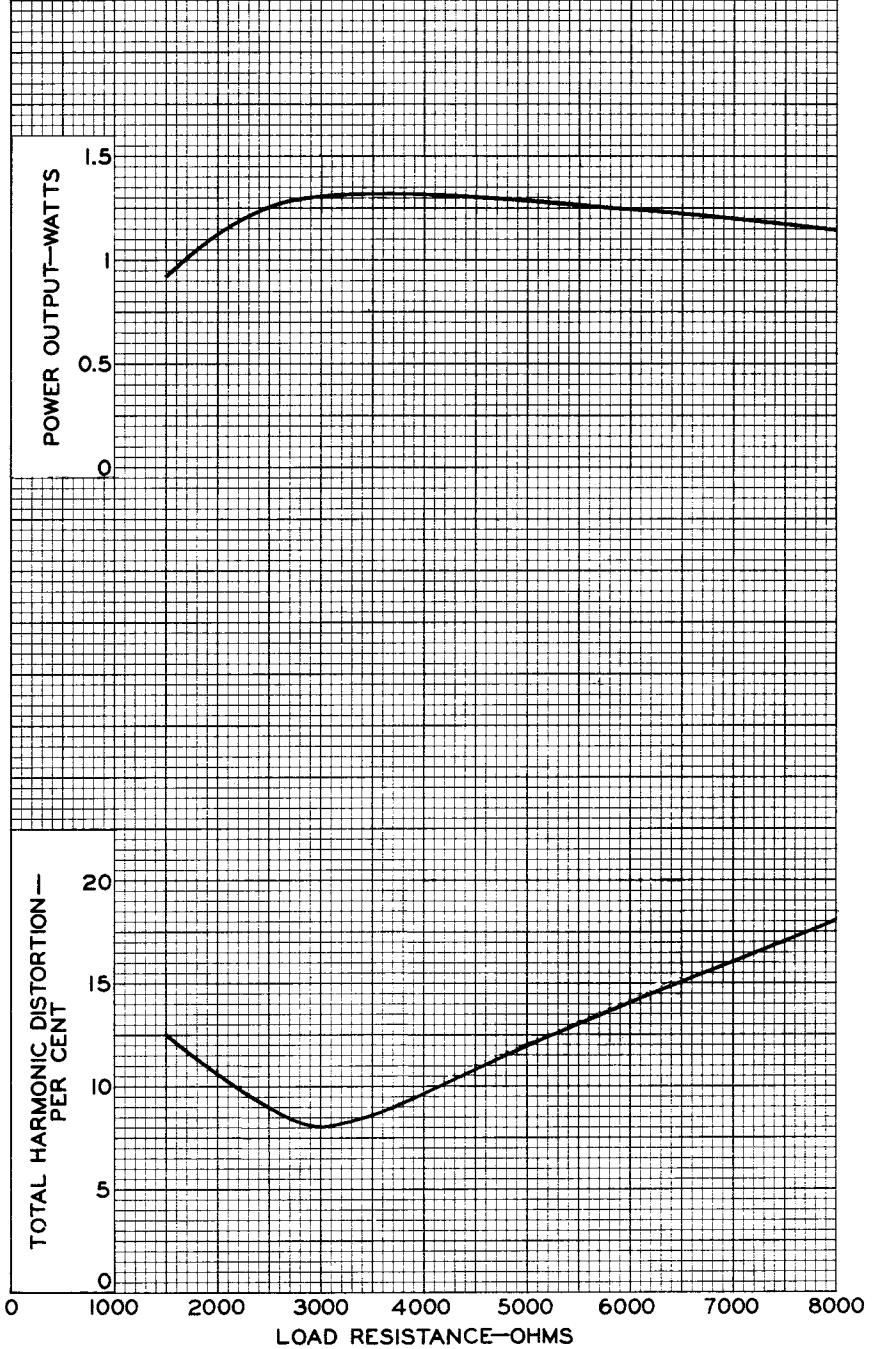

92CM-10545

